


Submitted Model No.:\_\_\_\_\_\_\_Specific Features:

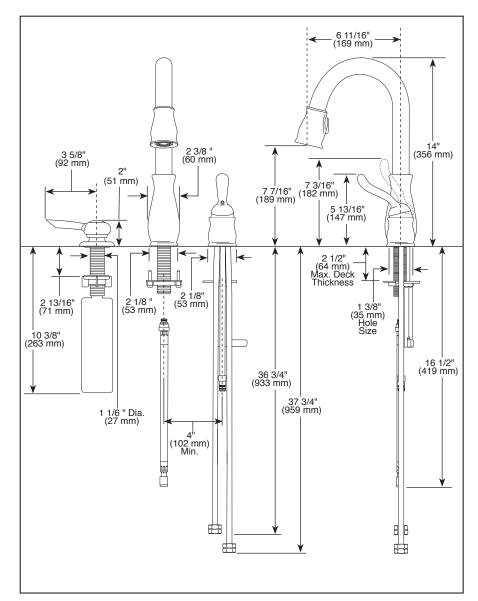

## **O**DELTA

# BAR / PREP SINK FAUCETS

- Leland<sup>®</sup> Collection
- Single Handle Widespread
- 2 Hole Sink Applications
- DIAMOND Seal® Technology
- Integrated Supply Tubes
- 2-Function Pull-Down
- MagnaTite<sup>®</sup> Docking System

#### **STANDARD SPECIFICATIONS:**

- Single handle, 2-function pull-down kitchen faucets for exposed mounting on two hole sinks.
- 14" (356 mm) high, 6 11/16" (169 mm) long, spout swings 360°.
- Control mechanism shall be the diamond coated ceramic cartridge.
- Lever handle. Control shall return to neutral position when faucet is turned off.
- Finished handle button with red/blue graphics to indicate hot/cold temperature.
- Integral double check valves in sprayer assembly.
- Disposable hose lead to aid installation.
- Recommended hole size 1 3/8" (35mm) on 4" (102mm) centers.
- 3/8" O.D. straight, staggered pex supply tubes 36 3/4" (934 mm) and 37 3/4" (959 mm) long.
- Touch-Clean® 2 function (stream spray) sprayhead.
- MagnaTite® docking system secures sprayer to spout.
- Maximum 1.80 gpm @ 60 psi, 6.8 L/min @ 414 kPa
- RP60734 wand assembly available with flow rate of Maximum 1.50 gpm @ 60 psi, 5.7 L/min @ 414 kPa

#### **WARRANTY**

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

### **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.6
- Indicates compliance to ICC/ANSI A117.1
- Verified compliant with .25% weighted average Pb content regulations.

