

## Caséta® Wireless Load Controls


The Caséta® Wireless family of Dimmers and Switches can be controlled directly and remotely when paired with Pico® Remote Controls providing a system that delivers convenience and ease of installation.

Caséta® Wireless Dimmers and Switches use Lutron® patented Clear Connect® RF Technology which enables wireless communication with Pico® Remote Controls and the Lutron® Smart Bridge and Smart Bridge PRO.


### Features

- Works with Pico® Remote Control
- Works with the Lutron® App (via a Smart Bridge or Smart Bridge PRO)<sup>1</sup>
- Lutron® patented Clear Connect® RF Technology works through walls and floors
- Includes Front Accessible Service Switch (FASS™) for safe lamp replacement
- Works with Lutron® Radio Powr Savr™ Occupancy and Vacancy Sensors in standalone applications (sensors do not work with Smart Bridge or Smart Bridge PRO)


Caséta® Wireless In-Wall Switches




Caséta® Wireless In-Wall Dimmers



Caséta® Wireless ELV+ Dimmer



Caséta® Wireless Plug-In Lamp Dimmer



Note: Certain models or load types will require a neutral connection. (see Load Types and Capacity sections)

<sup>1</sup> The Lutron® App is required for setup and usage with the Smart Bridge and Smart Bridge PRO. The Lutron® App is compatible with iOS® devices version 8.0 or later and Android™ devices 4.0 or later. iOS is a registered trademark of Cisco in the U.S. and other countries and is used under license. Android is a trademark of Google Inc.

|                    |                       |
|--------------------|-----------------------|
| <b>Job Name:</b>   | <b>Model Numbers:</b> |
| <b>Job Number:</b> |                       |

## Specifications

### Regulatory Approvals

- cULus Listed
- NOM Certified
- FCC Approved. Complies with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules
- Industry Canada Certified
- IFTEL Certified
- NEMA 410 (-5ANS, -6ANS, -5WS, -10NXD, -5NE)

### Power

Operating voltage:

- 120 V~ 50/60 Hz: -3PCL, -6WCL, -10NXD, -6ANS, -5ANS, -5NE
- 120/277 V~ 50/60 Hz: -5WS-DV

### Key Design Features

- Tested to withstand electrostatic discharge without damage or memory loss, in accordance with IEC 61000-4-2.
- Tested to withstand surge voltages without damage or loss of operation, in accordance with IEEE C62.41-1991 Recommended Practice on Surge Voltages in Low-Voltage AC Power Circuits.
- Load controls always operate locally and do not require system control.
- Power failure memory: should power be interrupted, the control will return to its previously set level prior to the interruption when power is restored.
- PD-5WS-DV, PD-5ANS, PD-6ANS, and PD-10NXD use conventional 3-way wiring.
- Uses Lutron® Claro® Wallplates or designer-style wallplates from other manufacturers. Wallplates are sold separately.
- Lutron® Claro® Wallplates snap on with no visible means of attachment.
- Requires a 1-gang U.S. wallbox. 3½ in (89 mm) depth recommended, 2¼ in (57 mm) depth minimum.
- Green status LED(s) to indicate load status.

### System Communications and Capacity

- Caséta® Wireless In-Wall Switches and Dimmers communicate with Pico® remote controls and the Lutron® Smart Bridge/Smart Bridge PRO through Radio Frequency (RF).
- The Caséta® Wireless In-Wall Switches and Dimmers communicate with Lutron® Radio Powr Savr™ Occupancy and Vacancy Sensors in a standalone application. Sensors do not work with Smart Bridge or Smart Bridge PRO.
- The Caséta® Wireless In-Wall Switches and Dimmers must be located within 60 ft (18 m) line-of-sight or 30 ft (9 m) through walls, of Pico® remote controls and Lutron® Smart Bridge devices.

### Device limits

- Pico® Remote Controls and Radio Powr Savr™ Occupancy Sensors: up to 10 devices (total) may be paired to each Caséta® Wireless In-Wall Switch/Dimmer (with no Smart Bridge installed).
- Smart Bridge or Smart Bridge PRO system: up to 50 total wireless devices (Caséta® Wireless Dimmers/Switches, Pico® Remote Controls, and Shades) are supported per system. Smart Bridge or Smart Bridge PRO counts as one device.

### Environment

- Ambient operating temperature: 32 °F to 104 °F (0 °C to 40 °C), 0% to 90% humidity, non-condensing. Indoor use only.
- PD-5WS-DV, PD-5ANS, PD-6ANS, and PD-10NXD can be used with mechanical switch in 3-way applications.

|  |                              |
|--|------------------------------|
| <p><b>Job Name:</b></p><br><br><p><b>Job Number:</b></p> | <p><b>Model Numbers:</b></p> |
|--|------------------------------|

## Features

|  | PRO Dimmer<br>PD-10NXD | Plug-In<br>Dimmer<br>PD-3PCL | In-Wall<br>Dimmer<br>PD-6WCL | ELV+<br>Dimmer<br>PD-5NE | 2-wire Switch<br>PD-5WS-DV | Neutral<br>Switch<br>PD-5ANS,<br>PD-6ANS |
|--|------------------------|------------------------------|------------------------------|--------------------------|----------------------------|--|
| Simple two-wire installation (no neutral wire required)        | √ <sup>1</sup>         |                              | √                            |                          | √                          |  |
| Capable of dimming loads                                       | √                      | √                            | √                            | √                        |                            |  |
| Favorite button (user defined one touch light level)           |                        |                              |                              | √                        |                            |  |
| Works with Hi-lume® 1% 2-Wire LED Drivers (Forward-phase only) | √                      |                              |                              | √                        | √                          | √  |
| Works with Power Interfaces (PHPM and GRX TVI)                 | √                      |                              |                              | √                        |                            |  |
| Works with Power Interfaces (PHPM-SW)                          |                        |                              |                              |                          |                            | √  |
| No wiring required   |                        | √                            |                              |                          |                            |  |

<sup>1</sup> In some low-wattage applications the PD-10NXD will require a neutral wire connection.

|                    |                       |
|--------------------|-----------------------|
| <b>Job Name:</b>   | <b>Model Numbers:</b> |
| <b>Job Number:</b> |                       |

### Load Type and Capacity - Switches

| Model Number           | Description   | Voltage    | Load Type                | Minimum Load             | Maximum Load <sup>3</sup> |               |                |
|------------------------|---|------------|--------------------------|--------------------------|---------------------------|---------------|----------------|
|                        |   |            |                          |                          | Not Ganged                | End of Gang   | Middle of Gang |
| PD-5WS-DV <sup>1</sup> | Two-wire switch   | 120 V~     | Incandescent/<br>Halogen | 25 W                     | 600 W                     | 450 W         | 350 W          |
|                        |   | 277 V~     | Incandescent/<br>Halogen | 25 W                     | 1350 W                    | 1100 W        | 800 W          |
|                        |   | 120 V~     | MLV                      | 25 W                     | 600 VA/475 W              | 450 VA/350 W  | 350 VA/275 W   |
|                        |   | 277 V~     | MLV                      | 25 W                     | 1350 VA/1075 W            | 1100 VA/875 W | 800 VA/625 W   |
|                        |   | 120 V~     | General<br>Purpose Fan   | 0.4 A                    | 3 A                       | 3 A           | 3 A            |
|                        |   | 120/277 V~ | LED                      | Use LUT-MLC <sup>2</sup> | 5 A                       | 4 A           | 3 A            |
|                        |   | 120/277 V~ | Fluorescent              | Use LUT-MLC <sup>2</sup> | 5 A                       | 4 A           | 3 A            |
|                        |   | 120 V~     | ELV                      | Use LUT-MLC <sup>2</sup> | 600 W                     | 450 W         | 350 W          |
|                        |   | 277 V~     | ELV                      | Use LUT-MLC <sup>2</sup> | 1350 W                    | 1100 W        | 800 W          |
| PD-5ANS                | Neutral-wire<br>switch<br>(neutral<br>connection<br>required) | 120 V~     | Incandescent/<br>Halogen | 10 W                     | 600 W                     | 600 W         | 600 W          |
|                        |   |            | MLV                      | 10 W                     | 600 VA                    | 600 VA        | 600 VA         |
|                        |   |            | Fan                      | 0.1 A                    | 3 A                       | 3 A           | 3 A            |
|                        |   |            | LED                      | 1 bulb                   | 5 A                       | 5 A           | 5 A            |
|                        |   |            | Fluorescent              | 1 ballast                | 5 A                       | 5 A           | 5 A            |
|                        |   |            | ELV                      | 10 W                     | 600 W                     | 600 W         | 600 W          |
|                        |   |            | PHPM-SW                  | 1 interface              | 2 interfaces              | 2 interfaces  | 2 interfaces   |
| PD-6ANS                | Neutral-wire<br>switch<br>(neutral<br>connection<br>required) | 120 V~     | Incandescent/<br>Halogen | 10 W                     | 720 W                     | 720 W         | 600 W          |
|                        |   |            | MLV                      | 10 W                     | 720 VA                    | 720 VA        | 600 VA         |
|                        |   |            | Fan                      | 0.1 A                    | 3.6 A                     | 3.6 A         | 3.6 A          |
|                        |   |            | LED                      | 1 bulb                   | 6 A                       | 6 A           | 5 A            |
|                        |   |            | Fluorescent              | 1 ballast                | 6 A                       | 6 A           | 5 A            |
|                        |   |            | ELV                      | 10 W                     | 720 W                     | 720 W         | 600 W          |
|                        |   |            | PHPM-SW                  | 1 interface              | 3 interfaces              | 3 interfaces  | 3 interfaces   |

<sup>1</sup> No neutral wire required.

<sup>2</sup> To ensure proper operation of the switch with LED, fluorescent, and ELV loads, a LUT-MLC may be required, especially at lower wattages. If the status LED on the switch is flashing or solid red in color, a LUT-MLC must be installed. To guarantee best performance, installing a LUT-MLC with these load types regardless of wattage is recommended. Rarely, some load types may still flicker or glow in the off state even with the LUT-MLC installed, in which case a different load may be required or more than one LUT-MLC is required.

<sup>3</sup> See "Ganging and Derating" section.

|                    |                       |
|--------------------|-----------------------|
| <b>Job Name:</b>   | <b>Model Numbers:</b> |
| <b>Job Number:</b> |                       |

## Load Type and Capacity - Dimmers

| Model Number   | Description   | Voltage | Load Type                                      | Minimum Load                             | Maximum Load        |                    |                    |  |
|--|---|---------|--|--|---------------------|--------------------|--------------------|--|
|  |   |         |  |  | Not Ganged          | End of Gang        | Middle of Gang     |  |
| PD-10NXD<br>PD-10NXD-XX-C <sup>8</sup>   | Wireless In-Wall Dimmer PRO (neutral connection required for certain load types) <sup>4</sup> | 120 V~  | Incandescent/Halogen                           | 10 W with neutral (25 W without neutral) | 1000 W              | 800 W              | 600 W              |  |
|  |   |         | MLV Halogen                                    | 10 W                                     | 1000 VA             | 800 VA             | 600 VA             |  |
|  |   |         | MLV LED  | See Application Note #559                |                     |                    |                    |  |
|  |   |         | CFL/LED (120 V~ Rated) <sup>3</sup>            | 1 bulb <sup>3</sup>                      | 250 W               | 250 W              | 250 W              |  |
|  |   |         | Hi-lume® 1% 2-Wire LED drivers                 | 1 driver                                 | 1000 W (13 drivers) | 800 W (13 drivers) | 600 W (13 drivers) |  |
|  |   |         | Dimmable Ballasts <sup>5</sup>                 | 1 ballast                                | 1000 VA             | 800 VA             | 600 VA             |  |
| PD-3PCL <sup>1,9</sup><br>PD-3PCL-WH-C <sup>8</sup><br>P-PKG1P-WH <sup>9,10</sup><br>P-BDG-PKG2P <sup>9,11</sup>   | Wireless Plug-In Lamp Dimmer  | 120 V~  | Incandescent/Halogen                           | 10 W                                     | 300 W               | N/A                | N/A                |  |
|  |   |         | CFL/LED (120 V~ Rated) <sup>3</sup>            | 1 bulb <sup>3</sup>                      | 100 W               | N/A                | N/A                |  |
| PD-5NE<br>PD-5NE-XX-C <sup>8</sup>   | Phase Selectable Dimmer (neutral connection required)   | 120 V~  | Incandescent/Halogen                           | 10 W                                     | 500 W               | 400 W              | 300 W              |  |
|  |   |         | CFL/LED (120 V~ Rated) <sup>3, 6, 7</sup>      | 1 bulb <sup>3</sup>                      | 250 W               | 250 W              | 250 W              |  |
|  |   |         | MLV Halogen <sup>2, 6, 7</sup>                 | 10 W                                     | 400 VA              | 400 VA             | 400 VA             |  |
|  |   |         | ELV Halogen                                    | 10 W                                     | 500 W               | 400 W              | 300 W              |  |
|  |   |         | Hi-lume® 1% 2-Wire LED drivers <sup>6, 7</sup> | 1 driver                                 | 400 W (20 drivers)  | 400 W (20 drivers) | 400 W (20 drivers) |  |
|  |   |         | Dimmable Ballasts <sup>5, 6, 7</sup>           | 1 ballast                                | 400 VA              | 400 VA             | 400 VA             |  |
|  |   |         | PHPM-PA/3F and GRX-TVI <sup>6, 7</sup>         | 1 interface                              | 3 interfaces        | 3 interfaces       | 3 interfaces       |  |
|  |   |         | ELV LED  | See Application Note #559                |                     |                    |                    |  |
| MLV LED  | See Application Note #559   |         |  |  |                     |                    |                    |  |
| PD-6WCL<br>PD-6WCL-XX-C <sup>8</sup><br>P-PKG1W-WH <sup>9,12</sup><br>P-BDG-PKG2W <sup>9,13</sup><br>P-BDG-PKG2W <sup>9,14</sup><br>P-BDGPRO-PKG1W <sup>9,15</sup> | Wireless In-Wall Dimmer   | 120 V~  | Incandescent/Halogen                           | 25 W                                     | 600 W               | 500 W              | 400 W              |  |
|  |   |         | CFL/LED (120 V~ Rated) <sup>3</sup>            | 1 bulb <sup>3</sup>                      | 150 W               | 150 W              | 150 W              |  |

<sup>1</sup> Cannot be ganged.

<sup>2</sup> Need to change load type to MLV. See [www.casetawireless.com/change\\_phase](http://www.casetawireless.com/change_phase)

<sup>3</sup> See bulb list at [www.lutron.com/led](http://www.lutron.com/led)

<sup>4</sup> For PD-10NXD, a neutral connection is required for MLV loads, LED drivers, dimmable ballasts, and power modules (PHPM-PA, PHPM-3F, and GRX-TVI).

<sup>5</sup> Compatible dimmable ballasts include Tu-Wire®, Mark X, and PowerSense®.

<sup>6</sup> These loads are best operated using a forward-phase control. Consult [www.lutron.com/bulblist](http://www.lutron.com/bulblist) to ensure the appropriate phase for bulb models used.

<sup>7</sup> SSL7 compliant when in forward-phase.

<sup>8</sup> Canadian packaged product.

<sup>9</sup> Available in WH only.

<sup>10</sup> Kit model number. Kit includes (1) PD-3PCL-WH, and (1) PJ2-3BRL-WH-L01R (3-button with raise/lower Pico® wireless control in White).

<sup>11</sup> Kit model number. Kit includes (1) L-BDG2-WH (Caséta® Wireless Smart Bridge with HomeKit technology), (1) PD-3PCL-WH, (1) PJ2-3BRL-WH-L01R (3-button with raise/lower Pico® wireless control in White) and (1) L-PED1-WH (Single tabletop pedestal in White).

<sup>12</sup> Kit model number. Kit includes (1) PD-6WCL-WH, (1) PJ2-3BRL-WH-L01R (3-button with raise/lower Pico® wireless control in White), and (1) CW-1-WH (single-gang faceplate in White).

<sup>13</sup> Kit model number. Kit includes (1) L-BDG2-WH (Caséta® Wireless Smart Bridge with HomeKit technology), (1) PD-6WCL-WH, (1) PJ2-3BRL-WH-L01R (3-button with raise/lower Pico® wireless control in White), and (1) CW-1-WH (single-gang faceplate in White).



<sup>14</sup> Kit model number. Kit includes (1) L-BDG2-WH (Caséta® Wireless Smart Bridge with HomeKit technology), (2) PD-6WCL-WH, (2) PJ2-3BRL-WH-L01R (3-button with raise/lower Pico® wireless control in White), (2) L-PED1-WH (Single tabletop pedestal in White) and (2) CW-1-WH (single-gang faceplate in White).

<sup>15</sup> PRO Kit model number. Kit includes (1) L-BDGPRO2-WH (Caséta® Wireless Smart Bridge PRO with HomeKit technology), (1) PD-6WCL-WH, (1) PJ2-3BRL-WH-L01R (3-button with raise/lower Pico® wireless control in White) and (1) CW-1-WH (single-gang faceplate in White).

|                    |                       |
|--------------------|-----------------------|
| <b>Job Name:</b>   | <b>Model Numbers:</b> |
| <b>Job Number:</b> |                       |

### Ganging and Derating


When ganging with other Switches/Dimmers in the same wallbox, derating is required. See “Load Type and Capacity” charts.

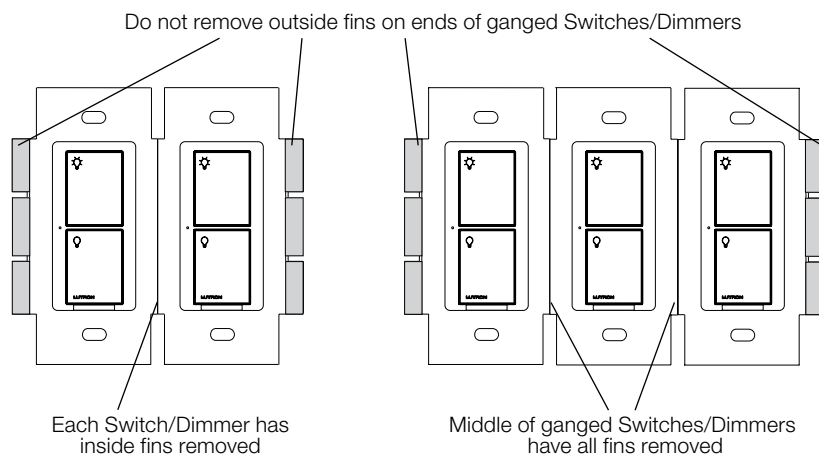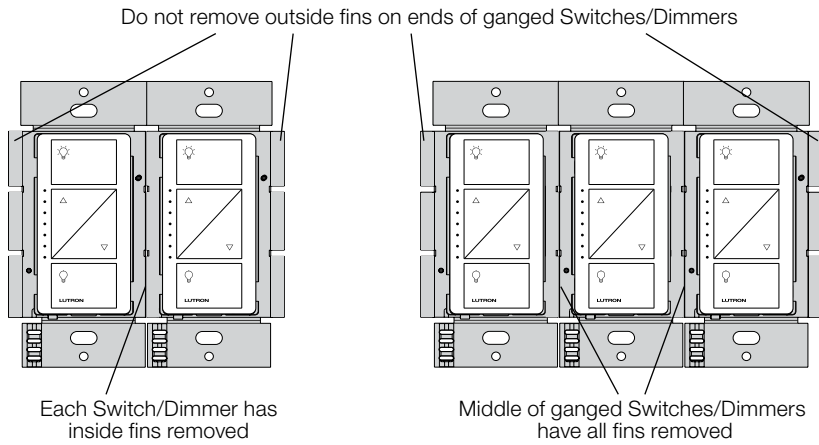


|             |                |
|-------------|----------------|
| Job Name:   | Model Numbers: |
| Job Number: |                |

# Operation

In-Wall Switches

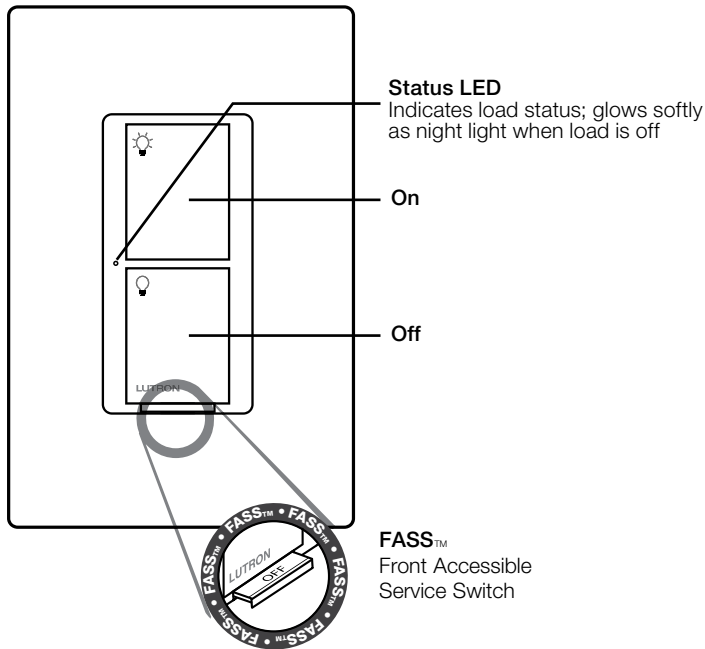


ELV+ Dimmer and In-Wall Dimmers

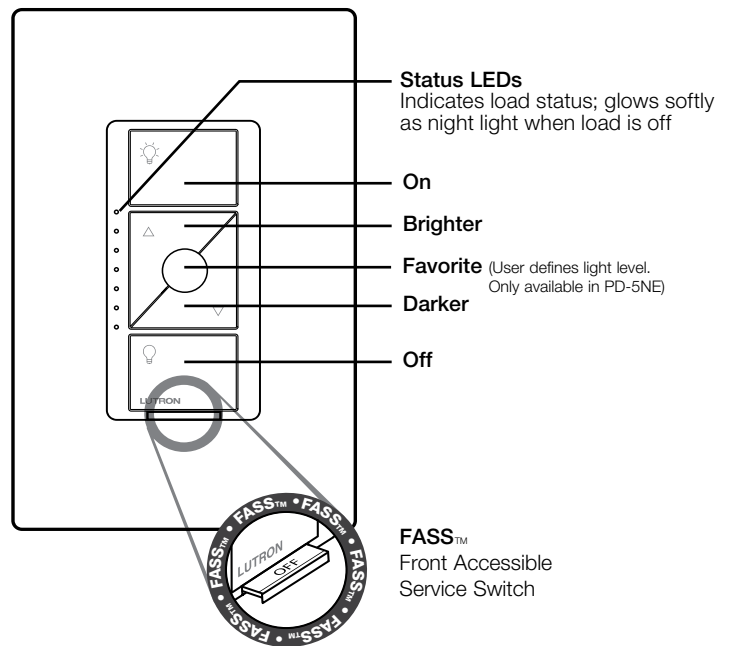


**FASS™ — Front Accessible Service Switch**  
**Important Notice:** To service load, remove power by pulling out the FASS™ as far as possible. To restore power after servicing load, push the FASS™ back in completely.

Plug-In Dimmer

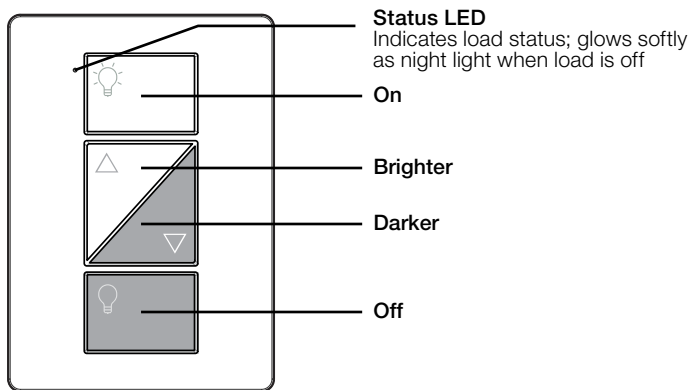

|  |                       |
|--|-----------------------|
| <p>Job Name:</p><br><br><p>Job Number:</p> | <p>Model Numbers:</p> |
|--|-----------------------|

# Mounting

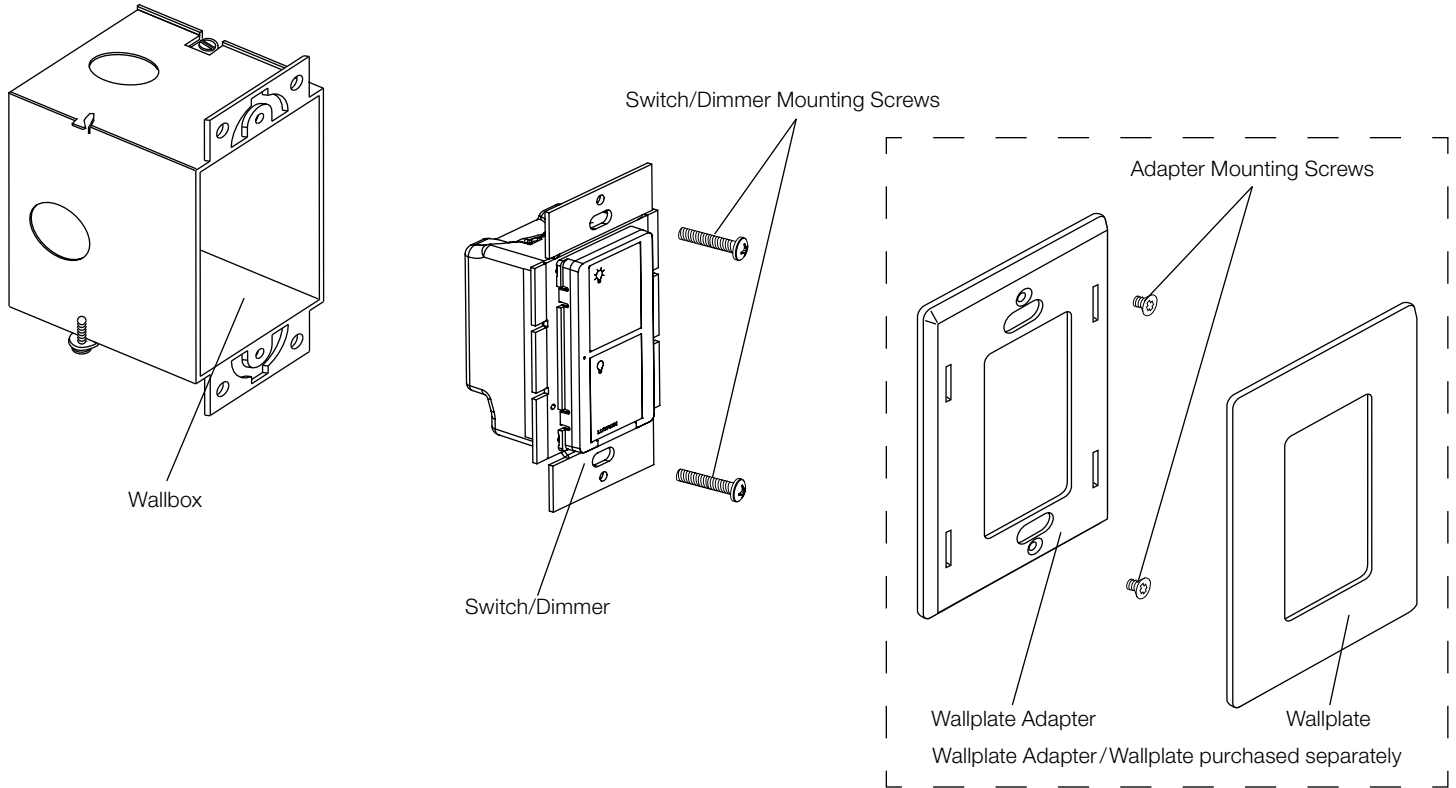


|             |                |
|-------------|----------------|
| Job Name:   | Model Numbers: |
| Job Number: |                |




## Dimensions In-Wall Switches and Dimmers

Front View

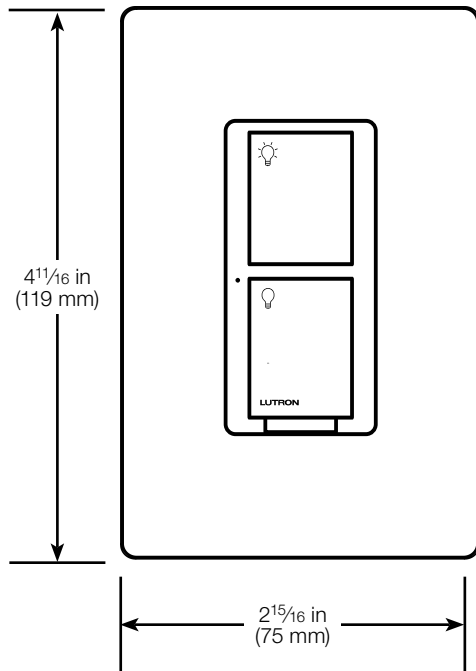


Side View

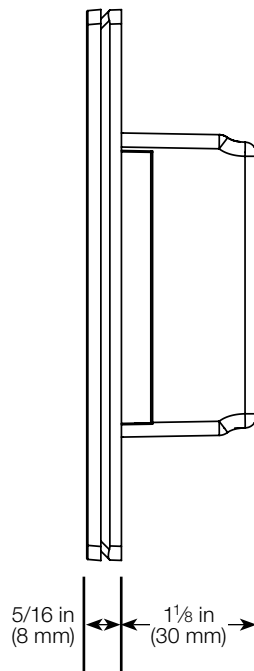


## Plug-In Dimmer

Front View

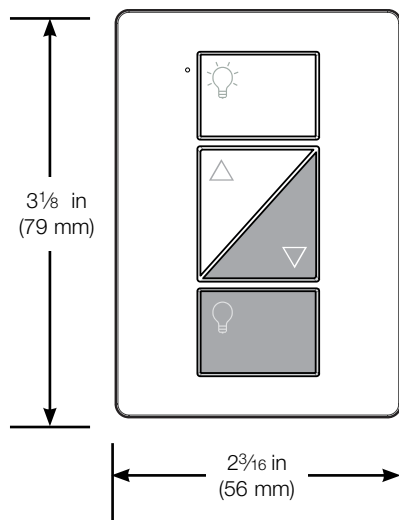

Side View

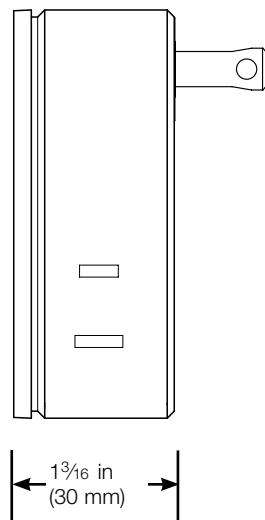


|  |                       |
|--|-----------------------|
| <p>Job Name:</p><br><br><p>Job Number:</p> | <p>Model Numbers:</p> |
|--|-----------------------|


# Wiring Diagrams - Switches

## Single Location Installation

### PD-5WS-DV

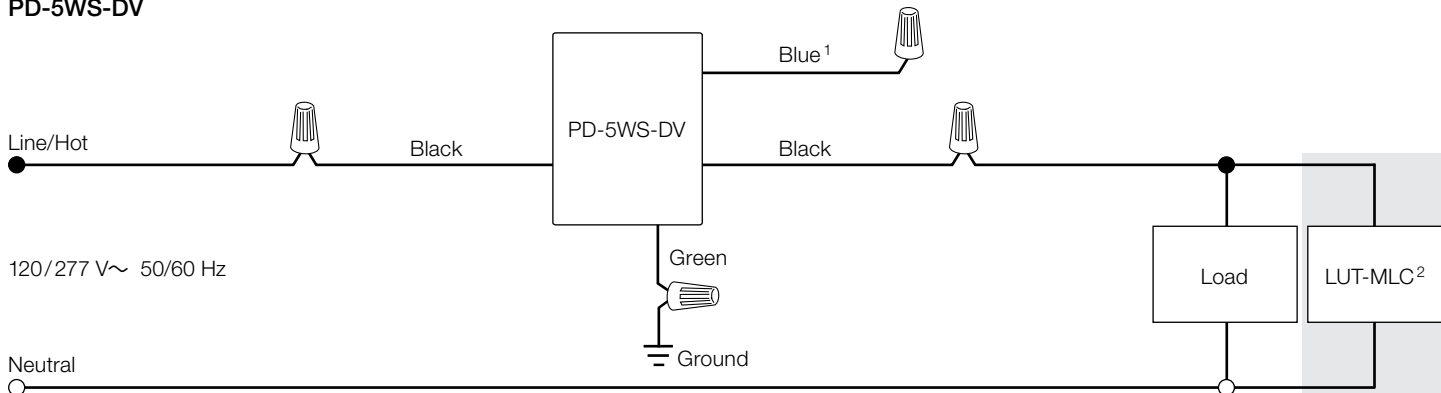

### PD-5ANS, PD-6ANS

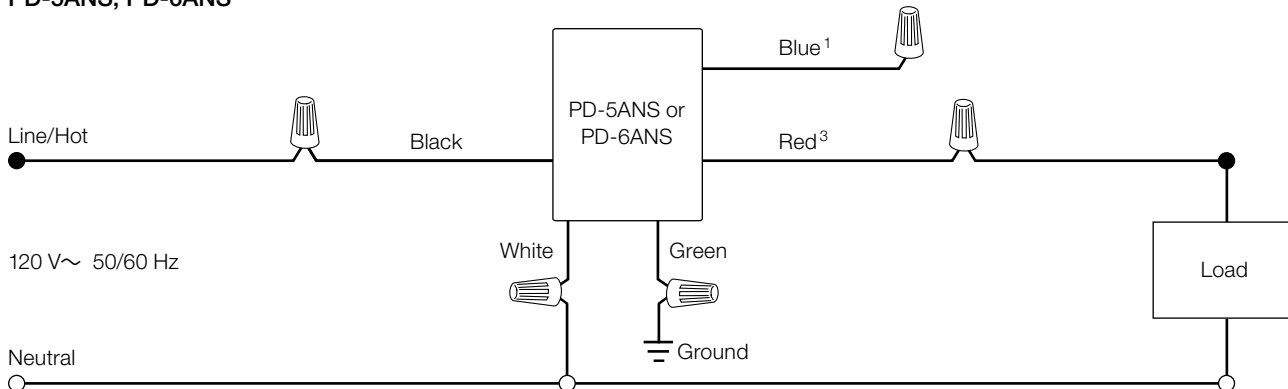

- <sup>1</sup> When using controls without a mechanical 3-way switch, cap the blue terminal. **Do not** connect the blue wire to any other wiring or to ground.
- <sup>2</sup> A LUT-MLC ensures proper function when LED, fluorescent, or ELV loads are used. Install the LUT-MLC inside a load fixture or in a separate junction box within the circuit.
- <sup>3</sup> The red wire must be connected to the load and the black wire must be connected to Line/Hot. The switch will not work if the wires are reversed.


(continued on next page...)

|             |                |
|-------------|----------------|
| Job Name:   | Model Numbers: |
| Job Number: |                |


### Wiring Diagrams - Switches (cont.) 3-Way Installation (with mechanical switch)

Option 1

#### PD-5WS-DV (Load-side)

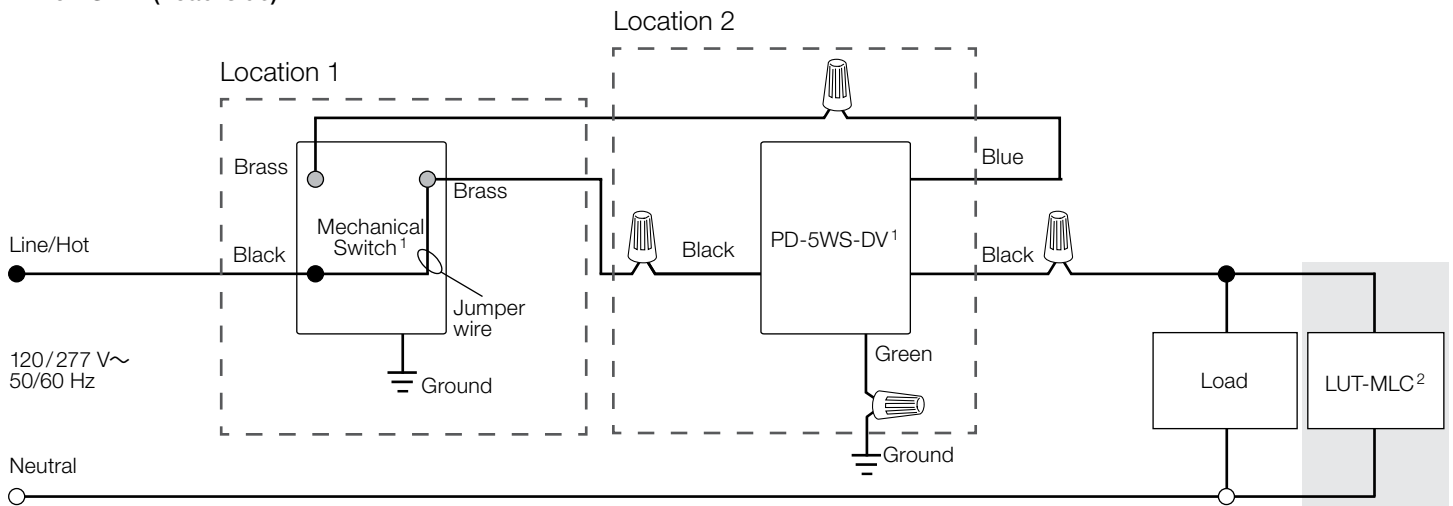

#### PD-5WS-DV (Line-side)

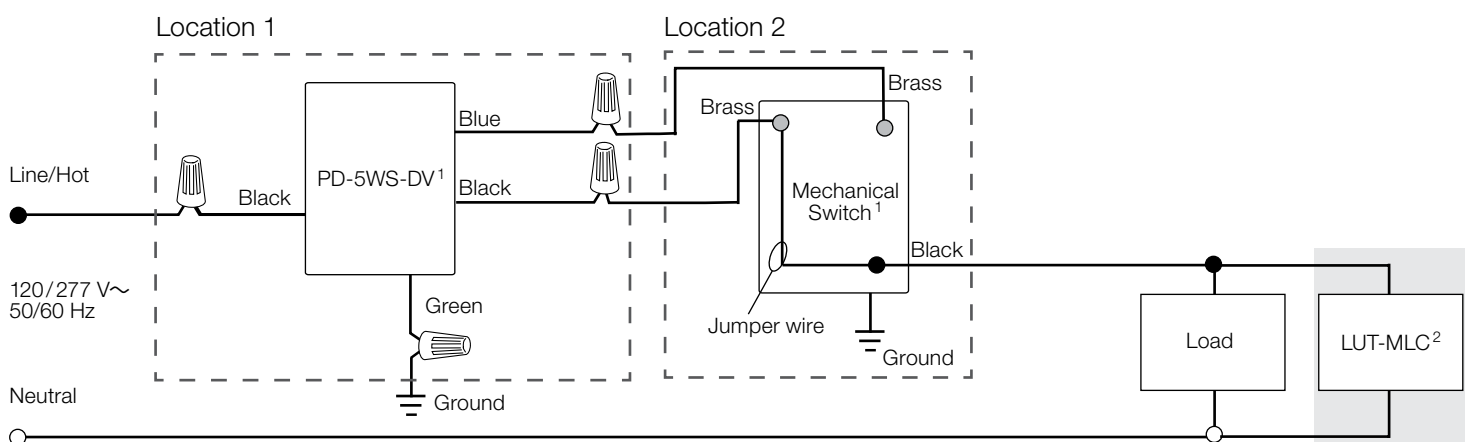

<sup>1</sup> Location of Caséta® Wireless In-Wall Switch and mechanical switch may be reversed.

<sup>2</sup> A LUT-MLC ensures proper function when LED, fluorescent, or ELV loads are used. Install the LUT-MLC inside a load fixture or in a separate junction box within the circuit.

(continued on next page...)


|             |                |
|-------------|----------------|
| Job Name:   | Model Numbers: |
| Job Number: |                |

# Wiring Diagrams - Switches (cont.)


## 3-Way Installation (with mechanical switch)

Option 1 (cont.)

### PD-5ANS, PD-6ANS (Load-side)

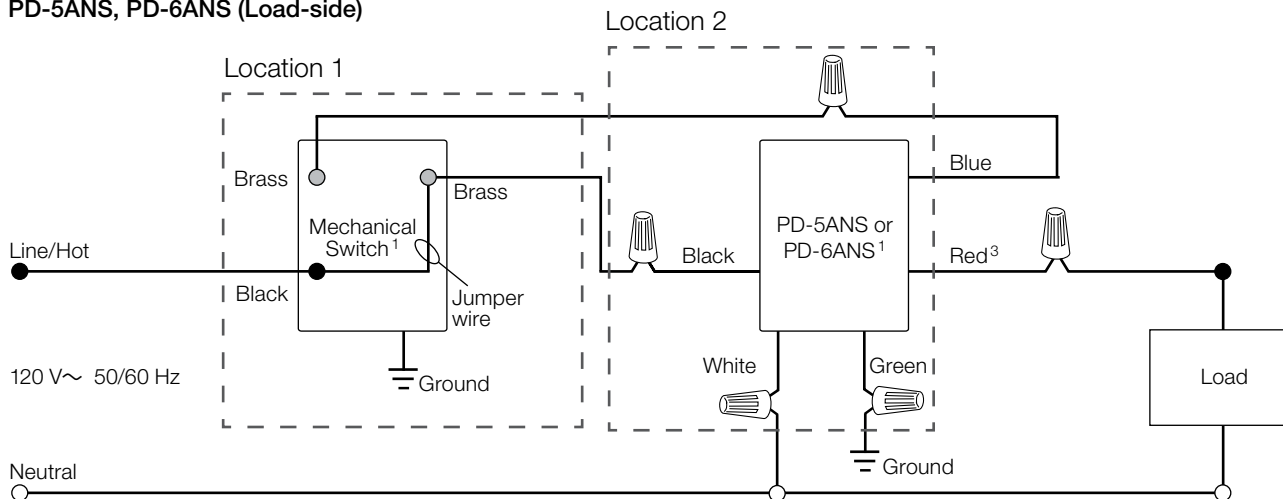

### PD-5ANS, PD-6ANS (Line-side)

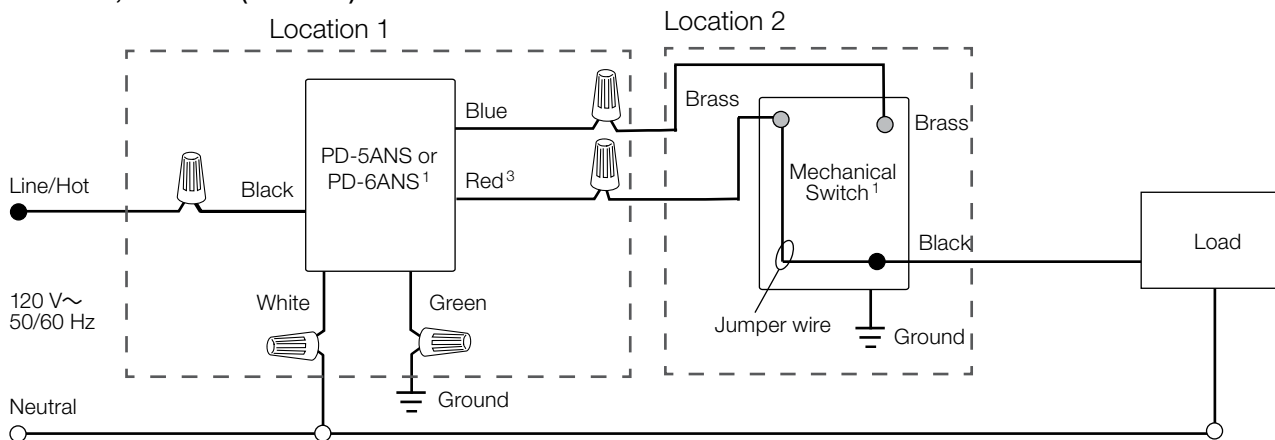

<sup>1</sup> Location of Caséta® Wireless In-Wall Switch and mechanical switch may be reversed.

<sup>2</sup> A LUT-MLC ensures proper function when LED, fluorescent, or ELV loads are used. Install the LUT-MLC inside a load fixture or in a separate junction box within the circuit.

<sup>3</sup> The red wire must be connected to the load and the black wire must be connected to Line/Hot. The switch will not work if the wires are reversed.


|                    |                       |
|--------------------|-----------------------|
| <b>Job Name:</b>   | <b>Model Numbers:</b> |
| <b>Job Number:</b> |                       |

## Wiring Diagrams - Switches (cont.)


### 3-Way Installation (with Pico® remote controls)

Option 2: PJ2-2B-xx and wallbox mounting adapters (PICO-WBX-ADAPT)

#### PD-5WS-DV

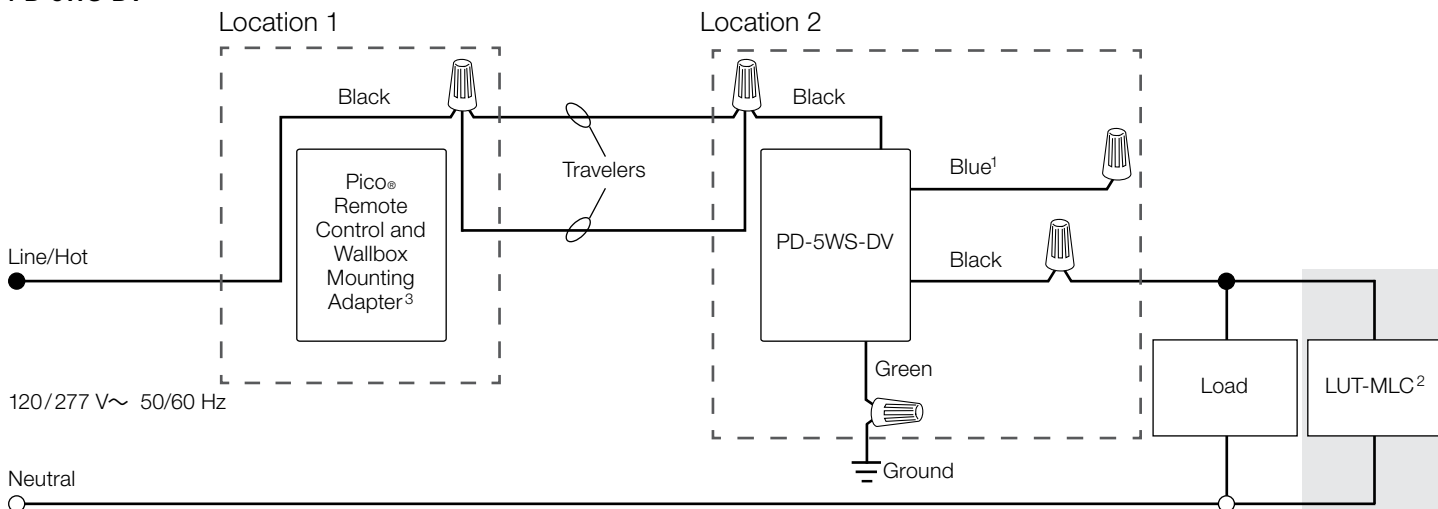

#### PD-5ANS, PD-6ANS

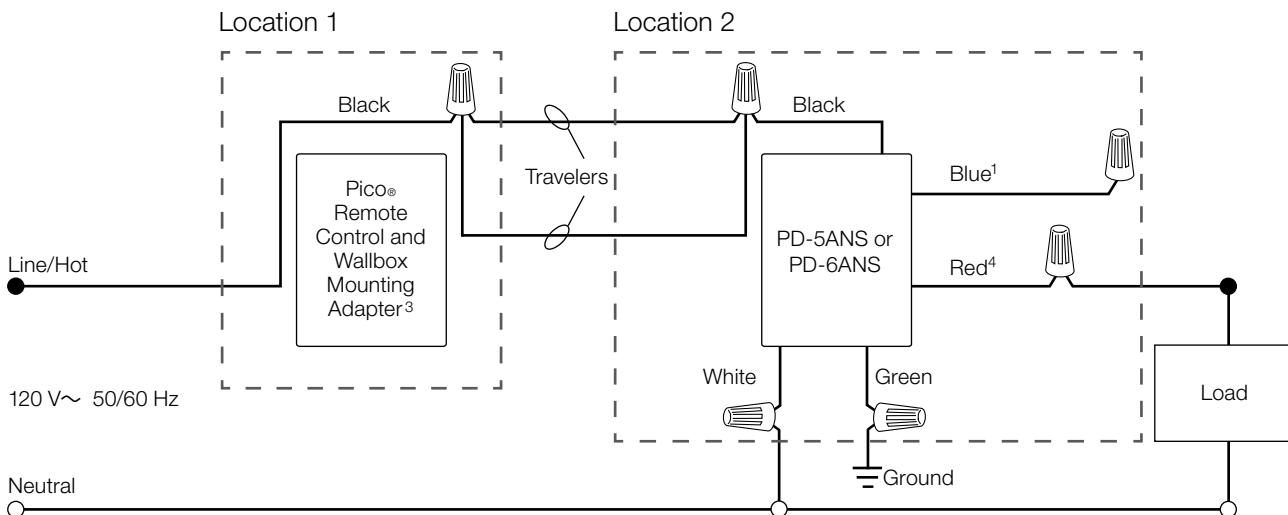

- <sup>1</sup> When using controls without mechanical 3-way switch, cap the blue terminal. **Do not** connect the blue wire to any other wiring or to ground.
- <sup>2</sup> A LUT-MLC ensures proper function when LED, fluorescent, or ELV loads are used. Install the LUT-MLC inside a load fixture or in a separate junction box within the circuit.
- <sup>3</sup> The mechanical switch will need to be removed so the Pico® Remote Control can be installed.
- <sup>4</sup> The red wire must be connected to the load and the black wire must be connected to Line/Hot. The switch will not work if the wires are reversed.

(continued on next page...)


|             |                |
|-------------|----------------|
| Job Name:   | Model Numbers: |
| Job Number: |                |

## Wiring Diagrams - Switches (cont.)


### Multi-location Installation (3 or more switches control the load)

With Pico® remote controls (PJ2-2B-xx) and wallbox mounting adapters (PICO-WBX-ADAPT)

#### PD-5WS-DV

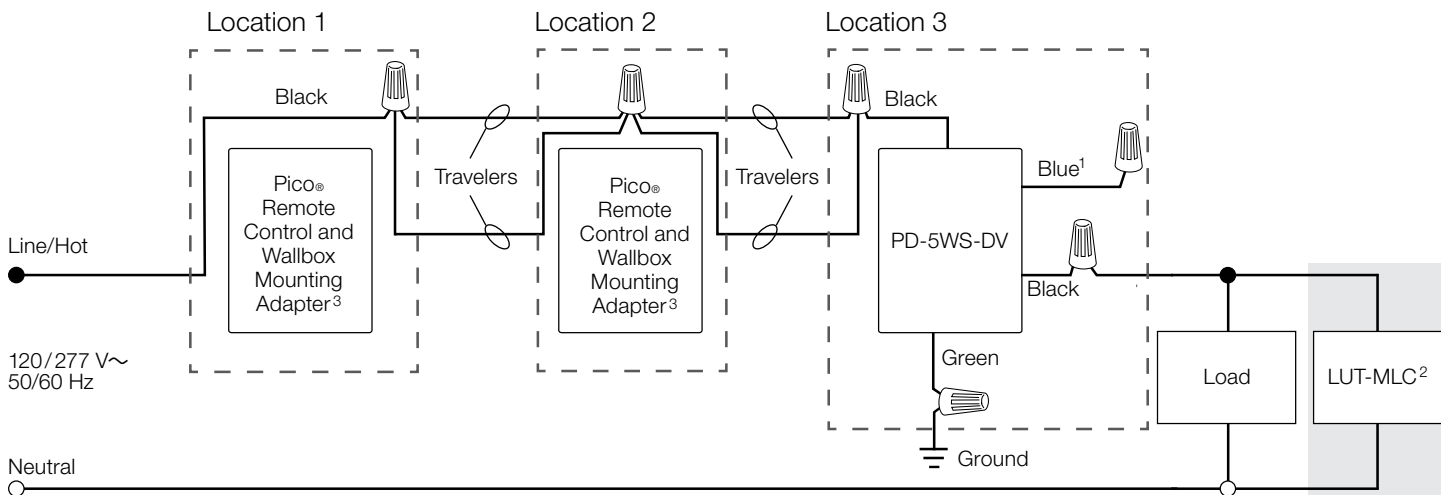

#### PD-5ANS, PD-6ANS

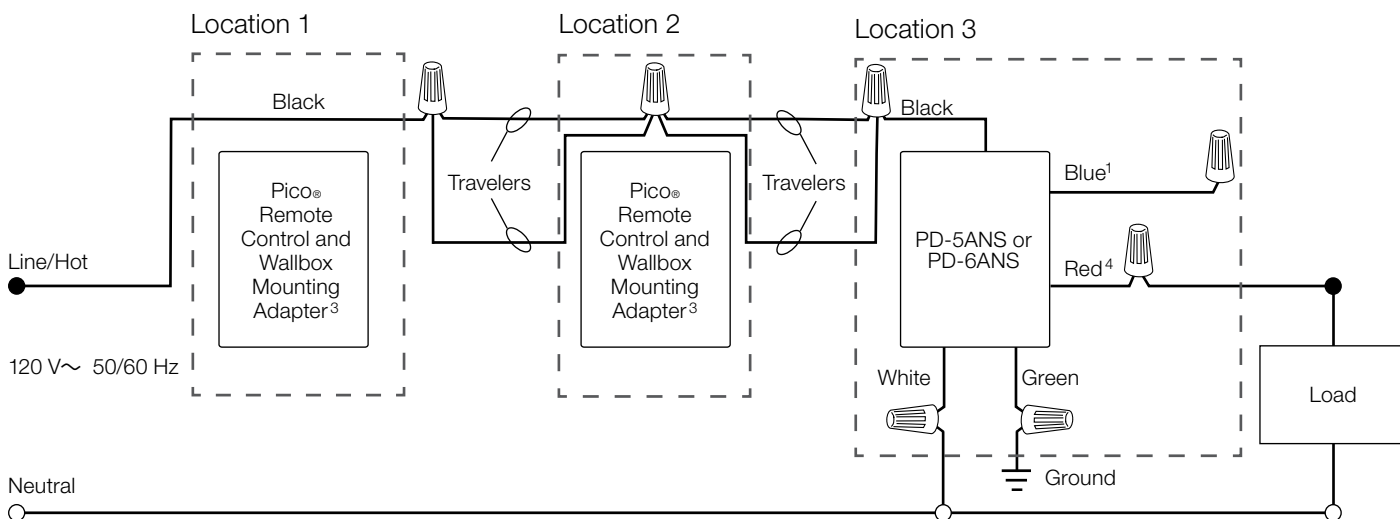


- 1 When using controls without mechanical 3-way switch, cap the blue terminal. **Do not** connect the blue wire to any other wiring or to ground.
- 2 A LUT-MLC ensures proper function when LED, fluorescent, or ELV loads are used. Install the LUT-MLC inside a load fixture or in a separate junction box within the circuit.
- 3 The mechanical switch will need to be removed so the Pico® Remote Control can be installed.
- 4 The red wire must be connected to the load and the black wire must be connected to Line/Hot. The switch will not work if the wires are reversed.

|                    |                       |
|--------------------|-----------------------|
| <b>Job Name:</b>   | <b>Model Numbers:</b> |
| <b>Job Number:</b> |                       |


# Wiring Diagrams - Dimmers

## Single Location Installation

### PD-10NXD or PD-5NE

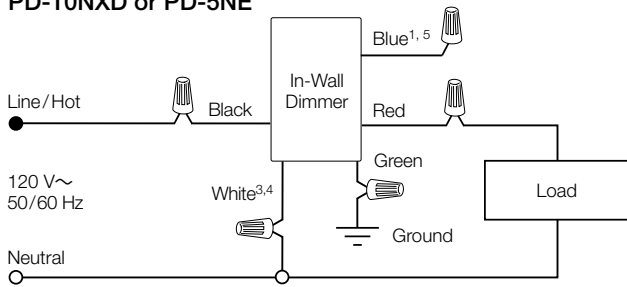

### PD-6WCL

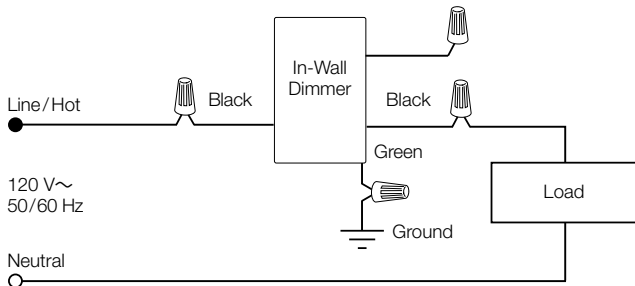

<sup>1</sup> When using controls without mechanical 3-way switch, cap the blue terminal. **Do not** connect the blue wire to any other wiring or to ground.

<sup>2</sup> Location of Caséta® Wireless In-Wall Dimmer PRO and mechanical switch may be reversed.

<sup>3</sup> For PD-10NXD only, neutral connection optional except for MLV loads, LED drivers, and power modules (PHPM-PA, PHPM-3F, and GRX-TVI).

<sup>4</sup> For PD-5NE, neutral is required.

<sup>5</sup> Blue wire is only present on the PD-10NXD model.


|             |                |
|-------------|----------------|
| Job Name:   | Model Numbers: |
| Job Number: |                |

# Wiring Diagrams - Dimmers (cont.)


## Multi-Location Installation

With Pico® remote controls (PJ2-XX-XX) and wallbox mounting adapters (PICO-WBX-ADAPT)

### PD-10NXD and PD-5NE

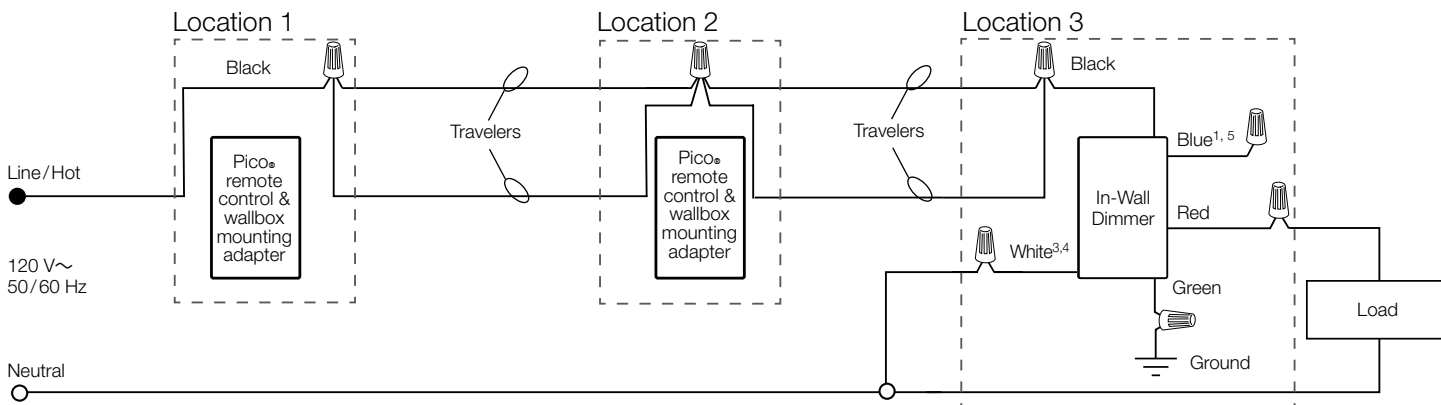

### PD-6WCL

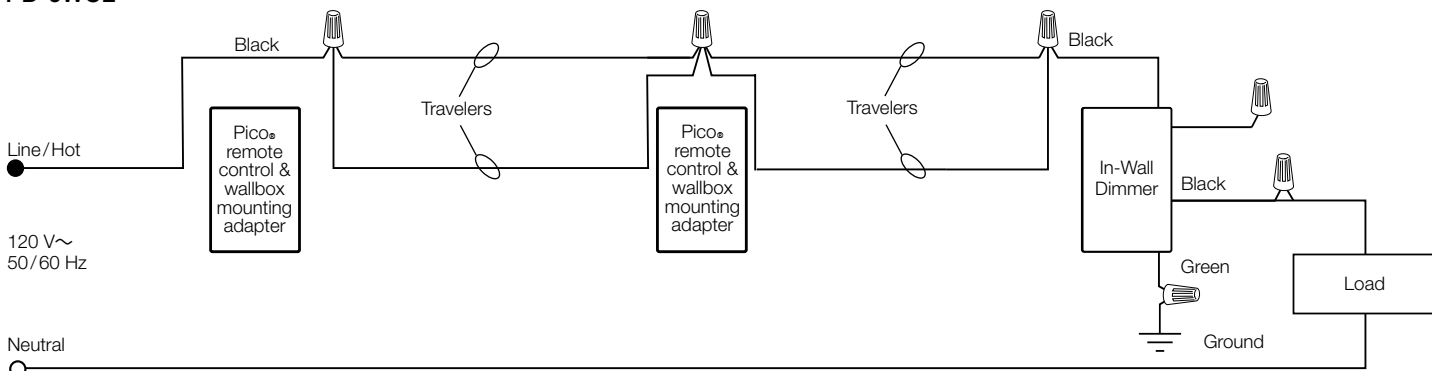

- <sup>1</sup> When using controls without mechanical 3-way switch, cap the blue terminal. **Do not** connect the blue wire to any other wiring or to ground.
- <sup>2</sup> Location of Caséta® Wireless In-Wall Dimmer PRO and mechanical switch may be reversed.
- <sup>3</sup> For PD-10NXD only, neutral connection optional except for MLV loads, LED drivers, and power modules (PHPM-PA, PHPM-3F, and GRX-TVI).
- <sup>4</sup> For PD-5NE, neutral is required.
- <sup>5</sup> Blue wire is only present on the PD-10NXD model.

|             |                |
|-------------|----------------|
| Job Name:   | Model Numbers: |
| Job Number: |                |




# Wiring Diagrams - Dimmers (cont.)

## 3-Way Installation


With mechanical switch

PD-10NXD

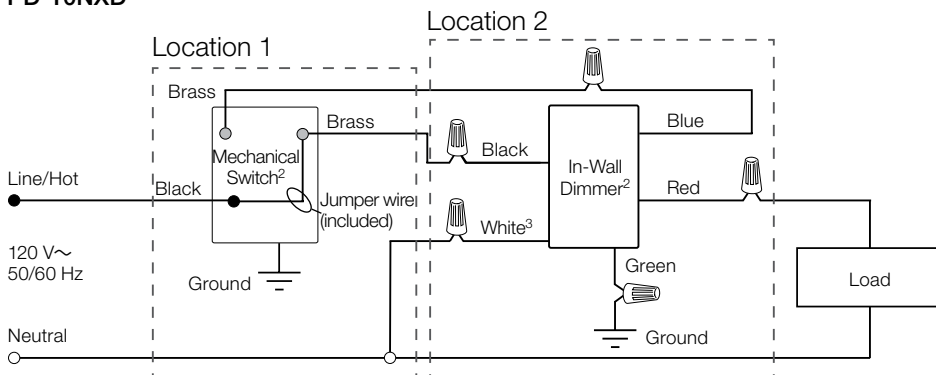

## Installation with PHPM - Neutral required<sup>4</sup>

PD-10NXD and PD-5NE

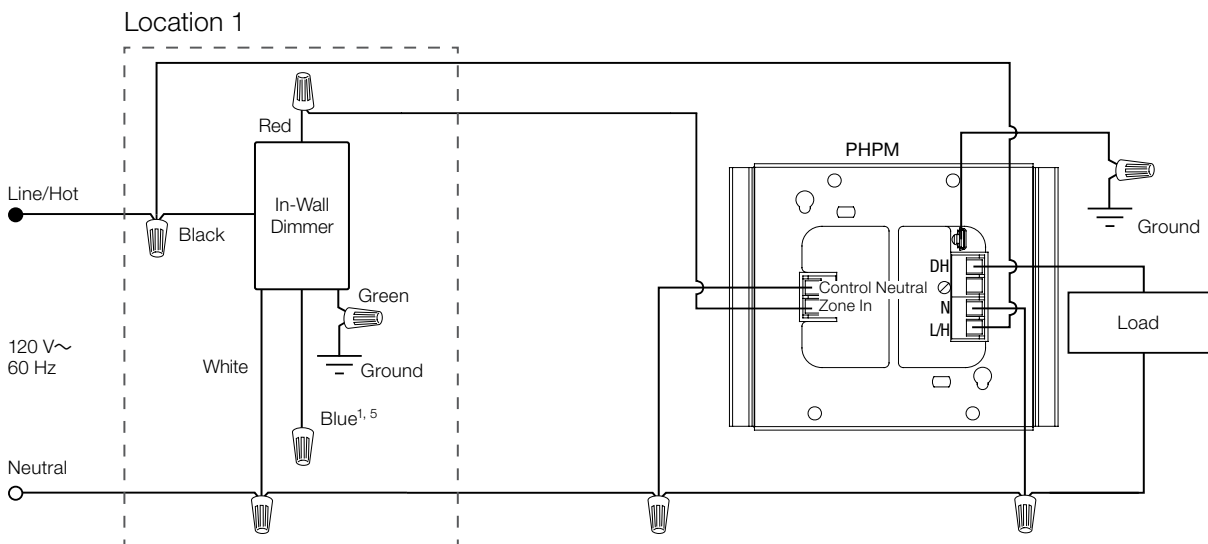


<sup>1</sup> When using controls without mechanical 3-way switch, cap the blue terminal. **Do not** connect the blue wire to any other wiring or to ground.  
<sup>2</sup> Location of In-Wall Dimmer and mechanical switch may be reversed.  
<sup>3</sup> Neutral connection optional except for MLV loads, LED drivers, and power modules (PHPM-PA, PHPM-3F, and GRX-TVI).  
<sup>4</sup> See Lutron® P/Ns 369356 and 369355 for additional wiring diagrams.  
<sup>5</sup> Blue wire is only present on the PD-10NXD model.

|             |                |
|-------------|----------------|
| Job Name:   | Model Numbers: |
| Job Number: |                |

# Wiring Diagrams - Dimmers (cont.)


## Installation with GRX-TVI - Neutral required<sup>1</sup>

PD-10NXD and PD-5NE

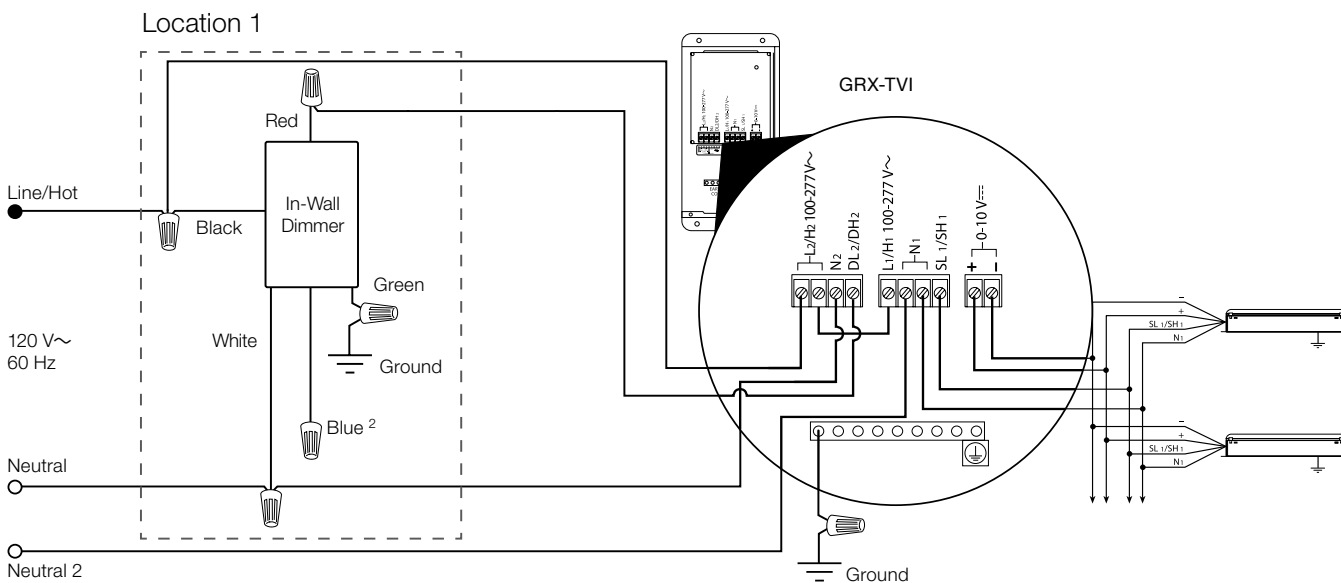

## Installation with Hi-lume® 1% 2-wire LED Drivers - Neutral required

PD-10NXD and PD-5NE

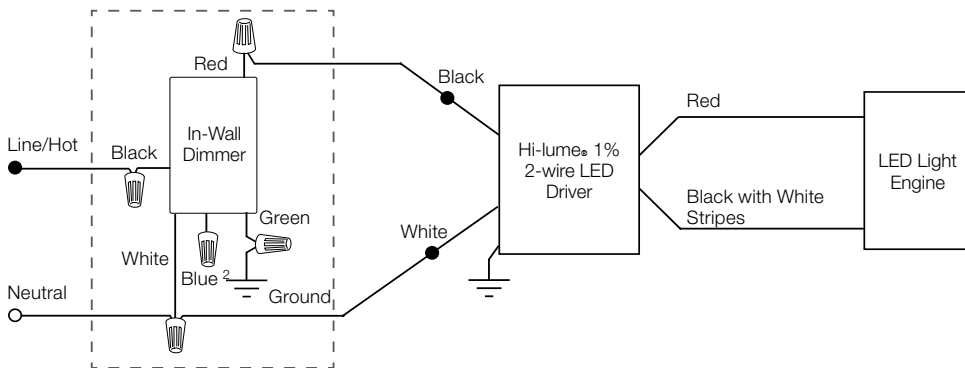

**Note:** For more information on Hi-lume® 1% 2-wire LED Drivers, see [www.lutron.com](http://www.lutron.com)

<sup>1</sup> See Lutron® P/N 369247 for additional wiring diagrams.

<sup>2</sup> Blue wire is only present on the PD-10NXD model.

|             |                |
|-------------|----------------|
| Job Name:   | Model Numbers: |
| Job Number: |                |

## Colors and Finishes

### Gloss Finishes




White  
WH



Black  
BL



Ivory  
IV



Light Almond  
LA

Due to printing limitations, colors and finishes shown cannot be guaranteed to perfectly match actual product colors.

PowerSense is a registered trademark of Osram Sylvania.

|                    |                       |
|--------------------|-----------------------|
| <b>Job Name:</b>   | <b>Model Numbers:</b> |
| <b>Job Number:</b> |                       |