



Sta-Kon®

Ferrule

T&B Catalog Number:

F8002

UPC Number:

78621033562

Status:


Active

Description:

Polypropylene Insulated Twin Ferrule, Length .669 Inches/17mm, Pin Length .394 Inches/10mm, Pin Diameter .071 Inches/1.8mm, Base Diameter .201 Inches/5.1mm, Conductor Range 2x18 AWG/2x0.75mm, Color Gray, Copper, Tin Plated

Features

Ferrules ensure reliable electrical connections when terminating conductors in screw clamp terminal blocks.

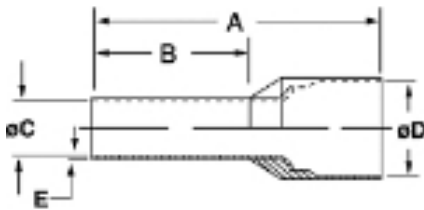

General

Ferrule Type	Insulated Twin
Insulation Type	Polypropylene
Material	Copper
Finish	Electro -Tin Plated
Color	Gray
Wire Range	2x18
Wire Size (mm ²)	2x0.75

Dimension Information

A (mm)	17.0
B (mm)	10.0
Diameter C (inches)	.071
Diameter C (mm)	1.8
Diameter D (inches)	.201
Diameter D (mm)	5.1
E (mm)	.15
A (inches)	.669
B (inches)	.394
E (inches)	.006

Specifications

Temperature Rating	105°C
Flammability Rating	94HB

Tooling

Tool Charts	Available on Website
Application Tools	T3
Recommended Tool	T3

Packaging

T&B Order Multiple	500
T&B Inner Pack	500
Package in Units	5000
T&B Sold in UOM	Each
T&B Weight Per UOM	0.63 lbs. per 1000

Application Support

Overview	Available on Website
----------	----------------------

Wire Guide Tables

Available on Website

Notes

Ferrule dimensions conform to DIN 46228, Part 4.

Certifications

RoHS Compliance

Yes

For further technical assistance, please contact us...

Thomas & Betts - USA
8155 T&B Blvd.
Memphis, TN 38125
www.tnb.com

T&B Technical Support
MS 3B-50
8155 T&B Blvd.
Memphis, TN 38125

Hours: 7AM - 6PM CDT
Monday-Friday
Phone: (888) 862-3289
Fax: (901) 252-1321
Email:techsupport@tnb.com