


CONGRATULATIONS!

Your purchase of the REDLINE® SELECT RC™ puts you at the top of your game amongst other competitors

CONTENTS:



REDLINE® RC FLASHLIGHT
w/ rechargeable battery pre-installed

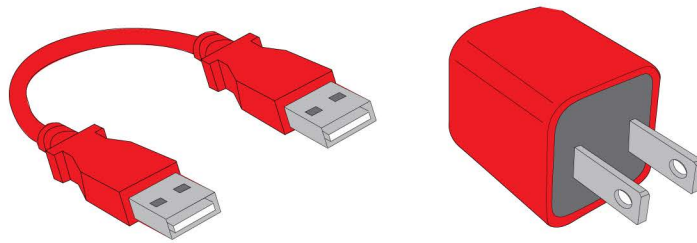

USB Cable + USB A/C Adapter

The Exporting or Re-Exporting of U.S. Controlled items without proper approval from the U.S. State or Commerce Departments is strictly prohibited.

All copyrighted and copyrightable materials, including, without limitation, the logo, design, text, graphics, pictures, copywriting and the selection and arrangement ("Materials") thereof are ALL RIGHTS RESERVED Copyright © 2014 Alliance Sports Group

U.S. Patent: D 659,869 S

DISTRIBUTED BY NEBO®
A DIVISION OF ALLIANCE SPORTS GROUP L.P
3025 N. GREAT SOUTHWEST PARKWAY
GRAND PRAIRIE, TEXAS 75050
800-255-6061

Made in China
VISIT OUR WEBSITE TO SEE OTHER GREAT NEBO® PRODUCTS!
www.nebotools.com

WARNING

AVOID EYE INJURY-Do not stare directly into beam or shine it directly into anyone's face. Doing so for more than a few seconds could cause retinal damage. Do not allow children to use LED lights unless under the supervision of an adult.

Warning: This product may contain a chemical known to the state of California to cause cancer and birth defects and other reproductive harm.

WARRANTY COVERAGE

This product is guaranteed against all defects in workmanship and materials for the original owner for one year from the date of purchase. Damage to or failure of the flashlight or any component thereof due to alteration, misuse, battery leakage or lack of maintenance will void any and all guarantees. Damage by leakage of batteries should be taken up with the manufacturer of the battery using their damage claim instructions. For any additional information call 1-800-255-6061

FLASHLIGHT OVERVIEW




4X ADJUSTABLE ZOOM & STEALTH RING

The **REDLINE® SELECT RC™** is equipped with a 4x adjustable zoom that changes from spotlight to floodlight with a simple twist of the bezel.

SHORT-RANGE: Turn the head of the flashlight clockwise for floodlight, perfect for short-range lighting.

LONG-RANGE: Turn the head of the flashlight counter-clockwise for spotlight, perfect for focusing light up to 222 meters.

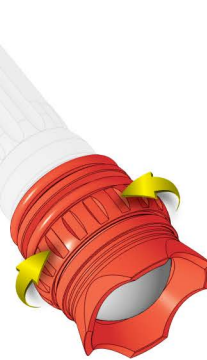


The **REDLINE® SELECT RC™** is equipped with the signature RED RING, that will illuminate the four different light modes. To conceal this red ring, turn the stealth ring clockwise and vice versa to reveal.



CHARGING THE FLASHLIGHT

TO REVEAL or TO HIDE THE USB CHARGING PORT:

turn the Anti-Roll Tactical ring clockwise/counter-clockwise

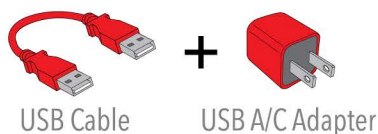

USB Cable

USB A/C Adapter

1 CHARGING YOUR FLASHLIGHT



Connect the supplied USB cable ~ one end into the USB port of the AC adapter & the other end into USB port of the flashlight.

2 CHARGING MODE: While charging, a steady **BLUE** LED will come ON in the power button, to indicate flashlight is charging.


3 CHARGE COMPLETED: Once flashlight is fully charged (approx. 6.5 hrs), **BLUE** LED will turn OFF.

4 TO USE LIGHT WHEN CHARGING: Before connecting USB cable, turn select dial to "L" to activate **LOW** mode. Turn the dial to any other light mode to deactivate the light. Only **LOW** mode can be accessed during charging.

CHARGING YOUR USB MOBILE DEVICE

TO REVEAL or TO HIDE THE USB CHARGING PORT:

turn the Anti-Roll Tactical ring clockwise/counter-clockwise

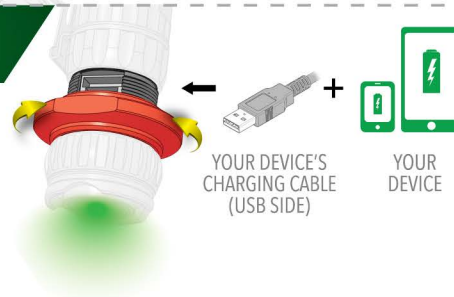

YOUR DEVICE'S CHARGING CABLE (USB SIDE)

YOUR DEVICE

1 USB POWER BANK

Connect a compatible USB cable from your device to the USB port on flashlight.

2 TO ACTIVATE POWER BANK: Hold flashlight power button for 3 seconds to activate. 2 GREEN blinking LED's in the power button will confirm charge mode.

3 POWER BANK STATUS: When 1 steady **RED** LED & 1 **GREEN** blinking LED shows, this indicates that flashlight battery level is 25% or less. This allows you to decide to keep charging your device or maintain 25% power in the flashlight. Flashlight turns OFF at 10% to protect the battery from over draining.

4 TO USE LIGHT WHEN CHARGING: Before connecting USB cable, turn select dial to "L" to activate **LOW** mode. Turn the dial to any other light mode to deactivate the light. Only **LOW** mode can be accessed during charging.

LIGHT MODES & SPECIFICATIONS

The **REDLINE® SELECT RC™** is equipped with a Smart Select Dial to easily navigate the 5 lighting modes. Simply turn dial to align the arrow with the desired light mode. Light modes can be changed while light is ON or OFF.

FIVE LIGHT MODES


- ▶ **S** - STROBE
- ▶ **H** - HIGH
- ▶ **M** - MEDIUM
- ▶ **L** - LOW
- ▶ **SL** - STEALTH LIGHT

STROBE:

For emergency situations and distress signaling, provides 8 hours of continuous use.

STEALTH LIGHT:

Provides low signature **GREEN** light from the power button for low-profile, stealth mode.




LUX, RUN TIME & DISTANCE RATINGS

STROBE	HIGH	MEDIUM	LOW	STEALTH LIGHT
1395 LUX / 8 hrs	3100 LUX / 2.5 hrs	1550 LUX / 8 hrs	310 LUX / 30 hrs	0.05 LUX / 120 hrs
125 meters	222 meters	130 meters	60 meters	0.9 meters

BATTERY CARE & REPLACEMENT

1. To open battery compartment, unscrew (counter-clockwise) the end cap where the button and magnetic base are located.
2. Remove battery cartridge, containing (1) pre-installed 18650 Li-ion battery.
3. Battery is designed for 500 life cycles. Before replacing with new battery, make sure current battery is no longer holding charge. Remove and dispose of battery properly.

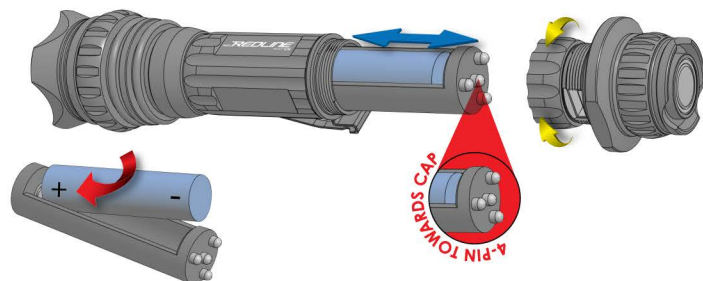

BATTERY ASSEMBLY

4. Insert new battery, positive (+) side facing spring.
5. Reinsert battery cartridge, make sure battery cartridge is facing the correct direction (positive end (+) of battery first.) Reattach end cap by turning clockwise.

NOTE: Use only recommended battery type. Use of any other battery will damage the product and void the warranty.