



Meter Centers



Surface Mount Meter-Mains, 1-Phase, 3-Wire 120/240V AC

- UL listed
- Pad locking provisions on all devices
- Side hinged door with one screw removal where shown
- Suitable for use only as service entrance equipment
- 22,000 AIC rated, or as noted
- RX type (or) HD type hub provision on top end wall as noted
- Contact local utility to confirm meter socket placement prior to installation
- See end of section for dimensions and wiring diagrams

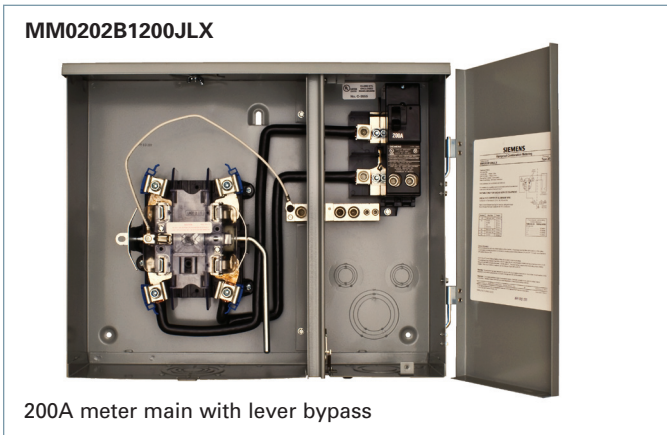

Catalog Number	Amp Rating (Cont.)	Utility Incoming	Bypass Type	No. of Spaces	No. of Circuits	Dimensions (inches)			Main Breaker	Short Circuit Rating	Hub Provision	5th Jaw	Cover Type
						H	W	D					
Meter-Main Breaker with Lever Bypass, Ringless, 200-400amp (Side-by-Side construction)													
MM0202B1200JLX	200	OH/UG	HQ Lever Bypass	2	2	21.1	17.2	5.3	QN2200H	22,000	RX-top, HC-bot	Installed	Ringless
MM0202L1200JLX						200A max Provision							
MM0404L1400RLM	320					HD	29.0	27.0	6.0		(2) QN(R), QN(R)H, QP, QPH	H35815-2	Ringless
MM0404L1400SDL							40.0	30.0	6.5		(2) Provisions for QN or QP type		

Meter-Main Breaker with Lever Bypass, Ringless, 100-400amp

MM0202B1100RLC	100	OH/UG	Lever	2	2	14.0	27.0	4.9	Q2100	22000	RX Cl. Plate	Installed	Ringless
MM0202B1200RLC	200					16.0	36.2	4.9	QN2200	10000			
MM0202L1125RLC						27.0	14.0	5.0	Main Lug				
MM0202L1200RLC						38.0	16.0	5.0	Main Lug				
MM0404B11515RL	320			HD	4	4	29.0	27.0	6.0	QN2150RH	22000	H35815-2	
MM0404B12010RL							QN2200RH/ Q2100H						
MM0404B1400RLM		400	Main Lug										

Meter-Main Breaker with Lever Bypass, Ringless, 100-200amp 3-phase

MM0303B3100RLC	100	OH/UG	Lever	3	3	26	13.5	5.3	3p 100A	10000	RX	—	Ringless
MM0303L3100RLC									Main Lug			—	Ringless
MM0303B3200RLC	200			0	0	38	16	5	QJ23B200	22000	Cl. Plate installed	Installed	Ringless