Strippers, Cutters & Crimpers

Manufactured with the needs of the professional tool user in mind, Klein strippers, cutters, and crimpers are designed to get jobs done with precision and quality.

For Professionals... Since 1857^m

KILEIN ROOLS

KLEIN TOOLS







Wire Strippers/Cutters Features:



Wire Strippers/Cutters

Additional Features:

- Easy-to-read markings.
- Precision shear-type blades.
- Cleanly shears 6-32 and 8-32 screws.
- Cat. No. 11054GLW features glow in the dark grips to easily locate your tool in dark or low lit areas.



11054GLW

Cat. No.	Handle Color	Overall Length	Strips and Cuts	Screw Shearing	Weight (lbs.)
11053	blue/red	7-1/8" (181 mm)	6 – 12 AWG stranded (10 mm ² – 2.5 mm ²)	6-32 & 8-32	.34
11054	blue/white	7-1/8" (181 mm)	8 – 16 AWG solid (8.4 mm ² – 1.3 mm ²) & 10 – 18 AWG stranded (5.3 mm ² – .82 mm ²)	6-32 & 8-32	.34
11054GLW	glow	7-1/8" (181 mm)	8 – 16 AWG solid (8.4 mm ² – 1.3 mm ²) & 10 – 18 AWG stranded (5.3 mm ² – .82 mm ²)	6-32 & 8-32	.34
11055	blue/yellow	7-1/8" (181 mm)	10 – 18 AWG solid (4.0 mm ² – .75 mm ²) & 12 – 20 AWG stranded (2.5 mm ² – .50 mm ²)	6-32 & 8-32	.34
11057	blue/red	7-1/8" (181 mm)	20 – 30 AWG solid (.50 mm ² – .14 mm ²) & 22 – 32 AWG stranded (.34 mm ² – .05 mm ²)	6-32 & 8-32	.32

Dual NM Cable Strippers/Cutters

Additional Features:

- 12/2 and 14/2 stripping slots quickly remove outer jacket of Type NM-B nonmetallic-sheathed cable.
- Stripping holes easily remove insulation on 12 and 14 AWG sold wire.
- Precision shear-type blades for square, clean cuts on solid copper wire.
- Narrow nose fits into tight places.



Cat. No.	Handle Color	Overall Length	Strips and Cuts	Type NM-B Cable	Screw Shearing	Weight (lbs.)
K1412	yellow/white	7-3/4" (197 mm)	12 & 14 AWG solid (2.5 mm ² & 1.5 mm ²)	12/2 & 14/2	6-32 & 8-32	.41

All dimensions are in inches and (millimeters).



www.kleintools.com

See page 296 for additional information on warnings.

Wire Strippers/Cutters





Wire Strippers/Cutters

Additional Features:

- Compact, lightweight wire-stripping and cutting tools.
- Narrow nose fits into tight places.
- Hardened steel with precision ground stripping holes.
- Do NOT use for cutting steel wire or screws.

Cat. No.	Handle Color	Overall Length	Strips and Cuts	Weight (lbs.)
11045	yellow	6-1/4" (159 mm)	10 – 18 AWG solid (4.0 mm ² – .75 mm ²)	.27
11046	red	6-1/4" (159 mm)	16 – 26 AWG stranded (1.0 mm ² – .14 mm ²)	.27
11047	yellow	6-1/4" (159 mm)	22 – 30 AWG solid (.34 mm ² – .05 mm ²)	.27
11049	red	6-1/4" (159 mm)	8-16 AWG stranded (6 mm ² – 1.0 mm ²)	.27



11045

All dimensions are in inches and (millimeters).



Dual-Wire Stripper/Cutter

Additional Features:

- Strips two wires in a single motion.
- Paired stripping holes for 14 and 12 AWG solid wire.
- One stripping hole for 10 AWG solid wire.
- Shear-type cutting blades for square, clean cuts.
- Narrow nose fits into tight places.
- Hardened steel with precision ground stripping holes.
- Do NOT use for cutting steel wire or screws.

Cat. No.	Strips and Cuts	Handle Color	Overall Length	Weight (lbs.)		
11048	10, 12, 14 AWG solid (4.0 mm², 2.5 mm², 1.5 mm²)	yellow	6-1/4" (159 mm)	.27	SOLID 10, 12, 14 AWG	11048

Wire Stripper/Cutters

- Strips six standard wire sizes without nicking wire.
- Scissors action of 1/2" (13 mm) wide cutter makes clean cuts with little effort.
- Serrated nose jaws to bend, shape or pull wire; holes for looping wire ends.
- Spring-loaded for self-opening action.
- Comfortable, plastic-covered handles.

Cat. No.	Strips and Cuts	Handle Color	Overall Length	Weight (lbs.)
1011	10 – 20 AWG solid (4.0 mm² – .50 mm²) 12 – 22 AWG stranded (2.5 mm² – .34 mm²)	blue	6-1/8" (156 mm)	.23
1011M	0.15 - 4.0 mm ² stranded wire	blue	6-1/8" (156 mm)	.23



KLEIN TOOLS

KTEIN LOOTS

Adjustable Wire Strippers/Cutters - Solid and Stranded Wire

- A handy, light, compact tool for stripping insulation.
- Convenient hole for looping or bending wire.
- Black-oxide finish with plastic-dipped handles.
- Cuts, strips, and loops 12-26 solid and stranded wire.
- Adjustable slide stop with set screw for repeat stripping work.

Cat. No.	Hold-Open Spring	Strips and Cuts	Handle Color	Overall Length	Weight (lbs.)
1004	yes	12 - 26 AWG solid & stranded (2.5 mm ² - 0.14 mm ²)	yellow	5" (127 mm)	.18
1003	no	12 - 26 AWG solid & stranded (2.5 mm ² - 0.14 mm ²)	yellow	5" (127 mm)	.14

Adjustable Wire Stripper/Cutter – Solid and Stranded Wire

Handle Color Overall Length

5-1/8" (130 mm)

Weight (lbs.)

.15

- Simply dial desired wire size for fast, easy stripping.
- Adjustable tool makes short work of cutting and stripping operations.
- Finely honed nose cutter easily gets into tight areas.
- Wire gauge dial sets stripping dies to proper size, helps prevent nicked wire.
- Black-oxide finish with plastic-dipped handles.
- Spring-loaded design tool opens automatically after each action.

12 - 24 AWG solid & stranded (2.5 mm² - .25 mm²) yellow



1004

74007

Cat. No. Strips and Cuts

All dimensions are in inches and (millimeters)



Wire Strippers/Cutters

Katapult[®] Wire Stripper/Cutter KATAPULT

- Quick and easy wire stripping and cutting.
- Compound action wire stripping: grip and strip via single action squeezing motion.
- Precision machined stripping holes easily remove jacket insulation without damaging the wire.
- Removes up to 1" (24 mm) in length of the insulation layer (jacket layer) in a single step.
- Tension loaded wire-grip gently holds the cable in place while retaining the cable geometry.
- Recoil spring design returns tool to ready position upon cycle completion.
- Cast alloy chassis with heavy-duty Ecoat finish for corrosion resistance and durability.
- Additional precision machined steel cutting blades available.

Cat. No.	Handle Color	Strips	Overall Length	Weight (lbs.)
11063W	blue/black	8-22 AWG solid (6 mm ² – .34 mm ²) 10-22 AWG stranded (6 mm ² – .34 mm ²)	6.6" (168 mm)	.75



RG6 coaxial cable replacement blades

10 AWG max wire cutting blades

8 – 22 AWG (6.0 mm² – .34 mm²) 16 – 26 AWG (1.0 mm² – .14 mm²)

0.15 mm - 4.0 mm

adjustable wire stop

Cat. No.

11082

11073

11074

11081

11063KNF

Wire Stop/Gauge

VDV110-046

Replacement Blades Sets

Weight

.01

.01

.01

.01

.01

.01



Self-Adjusting Wire Stripper/Cutter

- Strips 10-20 AWG solid, 12-22 AWG stranded, and 12/2 & 14/2 Romex[®] wire.
- Adjustable stopper to control the length of the core strip.
- Convenient wire cutter in handle.
- Grooved grips are designed for added comfort.



Cat. No.	Strips / Cuts	Handle Color	Overall Length	Weight (lbs.)
11061	10-20 AWG solid 12-22 AWG stranded 12/2 & 14/2 Romex®	blue/black	8.25" (210 mm)	0.79

Romex[®] is a registered trademark of Southwire Company.

NM Cable Ripper

- Easy-to-use cable ripper.
- Slit the outer jacket of Romex[®] cable (all sizes) and other nonmetallic (type NM) sheathed cable.
- Measure conductor wire gauge.

Cat. No.	Overall Length	Slits	Measures Wire Gauge	Weight (lbs.)
74017	4" (102 mm)	all sizes of $\operatorname{Romex}\nolimits^{\mathbb{R}}$ and NM	8 – 14 AWG (6 mm ² – 1 mm ²)	.08

Romex[®] is a registered trademark of Southwire Company.




74017

All dimensions are in inches and (millimeters).



Combination Wire-Stripping and Cutting Tools

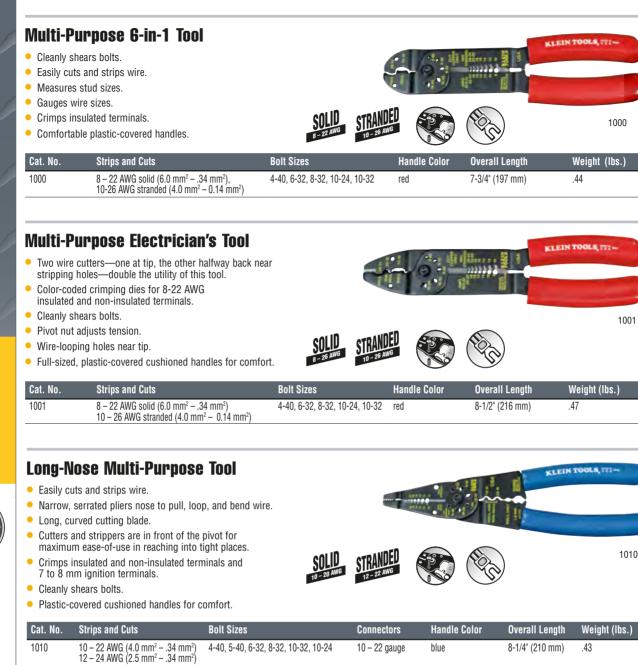

Crimping Tools

Crimping/Cutting Tools – Non-Insulated/Insulated Terminals

- Crimping die marked for insulated and non-insulated solderless terminals and connectors.
- Tapered nose design for working in confined spaces.
- Specially hardened wire cutter in nose.
- Hot-riveted joint for smooth action and no handle wobble.



All dimensions are in inches and (millimeters).



www.kleintools.com See page 296 for additional information on warnings.

Strippers, Cutters & Crimpers

36

Crimping Tools

Crimping/Cutting Tool – Non-Insulated Terminals

- Designed for crimping non-insulated solderless terminals and connectors.
- Specially hardened wire cutter in nose.
- Tapered nose for working in confined spaces.
- Hot-riveted joint for smooth action and no handle wobble.

~	(4)			
				1006
Cat. No.	Crimps	Handle Color	Overall Length	Weight (lbs.)
1006	10 – 22 AWG	black	9-3/4" (248 mm)	.85

Large Crimp Tool –Compound-Action

Crimpo						
	#6-4/0 AWG ugs and terminals.		A DESCRIPTION OF THE OWNER.	and the second		
-	mfortable hand grips for easy use.			and the second second	Charles War	
• All-in-on	ie, integral crimp nest. No removable	e parts or rotating	j dies.			
	erage handles and compound-actior cal advantage.	n mechanism for s	superior		and the second distance of the second distanc	
 Adjustm 	ent screw allows user to control crir	np depth.				
Cat. No.	Crimps	Handle Color	Overall Length	Weight (lbs.)	2006	
2006	#6 – 4/0 AWG battery lugs and terminals	red	19-1/2" (495 mm)	3.80		



Ratcheting Crimper – Insulated Terminals

- Cat. No. T1715 full cycle ratcheting crimper crimps insulated terminals in wire sizes 22-16 (front cavity), 16-14 (middle cavity), and 12-10 (rear cavity).
- Cat. No. T1710 compound-action tool crimps 10-22 AWG insulated terminals to meet or exceed MIL-SPEC pull-out tests.
- Cat. No. T1710 features special locator to quickly position terminal to double crimp.
- Built-in ratchet with safety release assures uniform crimps every time.
- Compound lever-action of narrow-span handles puts more crimping power into each squeeze.
- Comfort-grip plastic handles.

Cat. No.	Crimps	Handle Color	Overall Length	Weight (lbs.)
T1715	22 – 10 AWG	black	9" (229 mm)	1.05
T1710	10 – 22 AWG	black	9" (229 mm)	1.05





T1710

Crimps	Handle Color	Overall Length	Weight (lbs.)
22 – 10 AWG	black	9" (229 mm)	1.05
10 – 22 AWG	black	9" (229 mm)	1.05

All dimensions are in inches and (millimeters).



37