Ifberty Pumps[®]



Grinder Pump Accessories

Model GR20

For Standard Locations (Fits LSG and LSGX-Series Pumps)



Features a non-sparking bronze claw for installation in hazardous locations (Fits XLSG and XLSGX-Series Pumps)

Flanged Elbow, 90 Degree

Anti-siphon **Check Valve**

GR20-Series Guide Rail Base For Omnivore® Grinders

All GR20 models feature:

 Single guide pipe design with auto-align feature Powder coated for corrosion resistance Heavy nitrile sealing grommet Includes: mating flange, upper rail support bracket, stainless steel bolts and sealing grommet

Model GR20 Standard Location • For LSG and LSGX-Series

 All cast iron • 1-1/4" guide pipe threads FNPT • 1-1/4" discharge threads FNPT

Model GR NS Hazardous Loc ion

• For XLSG and XLSGX-Series Cast iron base with bronze (non-sparking) mating claw 1-1/4" guide pipe threads FNPT • 1-1/4" discharge threads FNPT

British Parallel Thread Model GR20-BSP

• For LSG and LSGX-Series All cast iron 1-1/4" guide pipe threads BSP • 1-1/4" discharge threads BSP

G90-Series Flanged Elbow, 90 Degree

 Fits all Omnivore[®] Series Grinders Provides vertical discharge for non-guide rail installations • 1-1/4" female threaded outlet Heavy cast iron construction Powder coated for corrosion resistance Includes sealing grommet and stainless steel bolts Model G90 1-1/4" FNPT Model G90-BSP 1-1/4" British parallel thread


ACV-Series Anti-siphon Check Valve

 1-1/4" threaded female connections Heavy cast iron construction Integrated heavy weight nitrile ball check valve Anti-siphon feature breaks suction to prevent unwanted tank siphonage • 125 PSI rated


Model ACV125 1-1/4" FNPT 1-1/4" British parallel thread Model ACV125-BSP

م ا



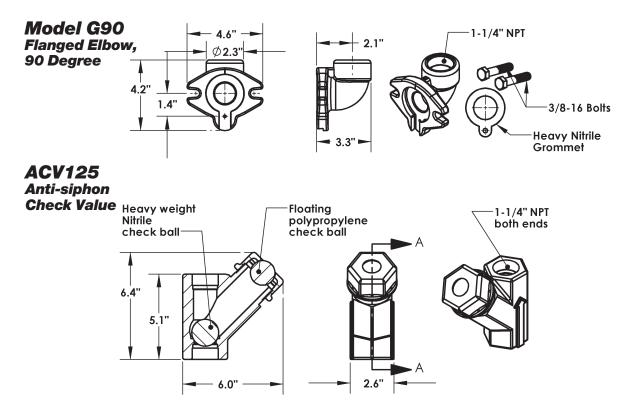

Model GR20 and GR20NS Guide Rail Base

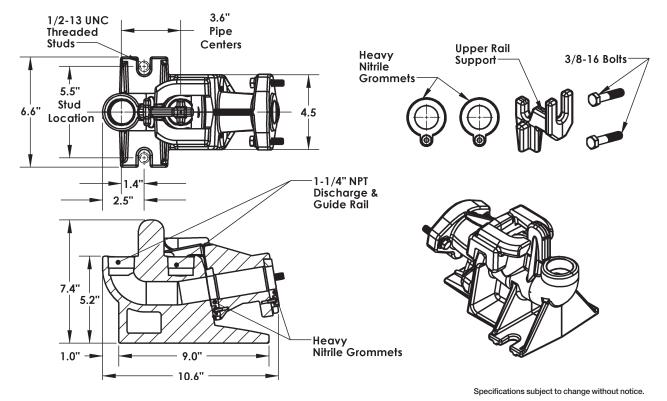

Liberty Pumps • 7000 Apple Tree Avenue • Bergen, New York 14416 • Phone 800-543-2550 Fax (585) 494-1839 www.libertypumps.com Copyright © Liberty Pumps, Inc. 2017

Copyright © Liberty Pumps, Inc. 2017 All rights reserved. LLIT 6400 R08/17