



High quality polycarbonate PL floodlight. Supplied with one, two or three 13 Watt twin tube compact fluorescent lamps. Adjustable swivel mounting arm with 1/2" thread. Lamps supplied.

Color: Bronze

Weight: 1.9 lbs

Project:	Type:
Prepared By:	Date:

Lamp Info		Ballast Info	
Type:	13W Twin	Type:	NPF 120V
Watts:	13W	120V:	N/A
Shape/Size:	N/A	208V:	N/A
Base:	N/A	240V:	N/A
ANSI:	N/A	277V:	N/A
Hours:	10,000	Input Watts:	0W
Lamp Lumens:	900		
Efficacy:	N/A		

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. (PLF 13 &26) For side wall mounting only.

Construction

Housing and Lens:

Corrosionproof and vandal resistant polycarbonate.

Lens Gasket:

High temperature tubular silicone.

Reflector:

Anodized aluminum.

Minimum Temperature:

0°F.

Electrical

Sockets:

GX23 base.

Optical

Lamp:

13 watt compact fluorescent lamps supplied with fixture.

F13:

Compact Fluorescent 13W.

LED Characteristics

Correlated Color Temp. (Nominal CCT):

2700K.

Other

Country of Origin:

Designed by RAB in New Jersey and assembled in Taiwan.


Trade Agreements Act Compliant:

This product is a product of Taiwan and a "designated country" end product that complies with the Trade Agreements Act.

GSA Schedule:

Suitable in accordance with FAR Subpart 25.4.

Dimensions

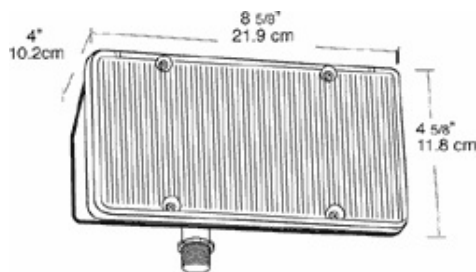

Features

Corrosion and vandal resistant polycarbonate housing and lens

Anodized aluminum reflector

0°F minimum operating temperature

High temperature tubular silicone gasket on PLF39 model

Heavy duty cast aluminum mounting arm and swivel with stainless steel screw

1/2" thread fits all standard covers