

## Glare Free



**WPM43LED**



Design is Protected by US Patents D772,474; D752,274

**LUMENS: 5,334**

**WATTS: 43**

**LUMENS PER WATT: 133**

**CRI: 82**

**CCT: 4500K**

**DIMMING: 10-100%**



## Ordering Information


CATALOG #	DESCRIPTION	VOLTS
<b>WPM43LED</b>	43W LED Wall Pak Pro	120-277

## Options

ADD SUFFIX #	DESCRIPTION
PC	120V Photocontrol
PM	208-277V Photocontrol


Note: Atlas uses only premium LED compatible photocontrols

## Recommended Mounting Height - 12-14 ft.

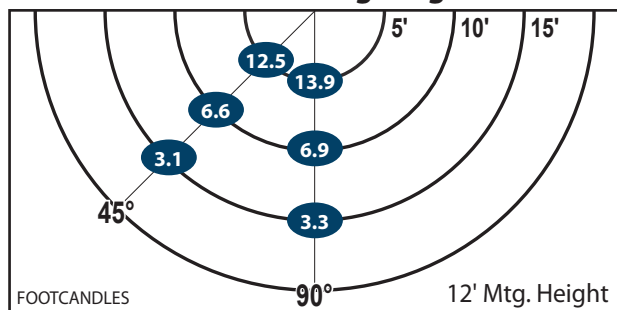

FOOTCANDLES ON THE GROUND							
Mtg. Hgt.	90°			45°			Avg. FCs 450 SQ. FT.
	5'	10'	15'	5'	10'	15'	
12'	13.9	6.9	3.3	12.5	6.6	3.1	<b>7.7</b>
14'	10.6	6.3	3.3	9.8	5.9	3.2	<b>6.5</b>

**200,000+ HOURS**



## Performance

- Eliminates Glare & Offensive Light
- Less Wasted Light
- More Footcandles on the Ground
- Labor Saving: Quick and Secure Mounting


## Dimensions and Specifications

**Overall Height: 6.25"**

**Overall Width: 9.29"**

**Depth: 9.06"**

**Weight: 10 lbs.**

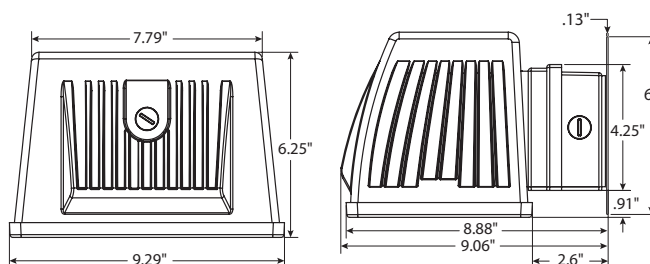

\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components

