

## Glare Free



**WLM64LED**



Design is Protected by U.S. Patent No. 9,482,395

**LUMENS: 6,349**

**WATTS: 64**

**LUMENS PER WATT: 101**

**CRI: 83**

**CCT: 4500K**

**DIMMING: 10-100%**



## Ordering Information


CATALOG #	DESCRIPTION	VOLTS
<b>WLM64LED</b>	64W LED Wall Light	120-277

## Options

ADD SUFFIX #	DESCRIPTION
PC	120V Photocontrol
PM	208-277V Photocontrol
EB	Emergency Back-Up

Note: Atlas uses only premium LED compatible photocontrols

## Recommended Mounting Height - 16-18 ft.

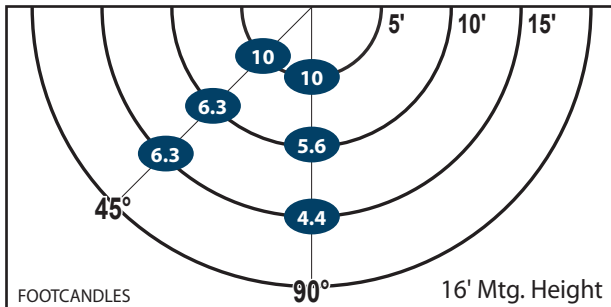

FOOTCANDLES ON THE GROUND							
Mtg. Hgt.	90°			45°			Avg. FCs 450 SQ. FT.
	5'	10'	15'	5'	10'	15'	
16'	10.0	6.3	6.3	10.0	5.6	4.4	<b>7.1</b>
18'	8.5	5.3	5.0	8.3	5.0	3.8	<b>6.0</b>

## Performance

- **95% Efficient Reflector Targets the Light**
- **Eliminates Glare & Offensive Light**
- **Less Wasted Light**
- **More Footcandles on the Ground**
- **Creates a Smooth & Uniform Light Pattern**


## Dimensions and Specifications

**Overall Height: 9.02"**


**Depth: 7.85"**

**Overall Width: 14.2"**

**Weight: 9.2 lbs.**

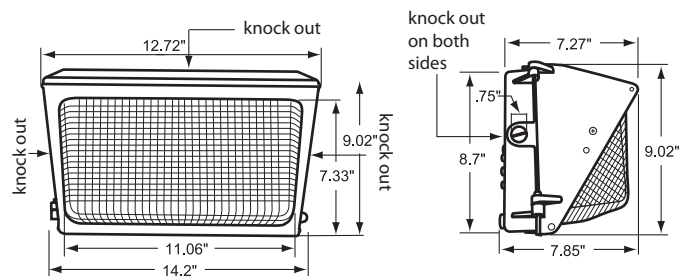

**200,000+  
HOURS**



\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components

