

Extra Wide Distribution



PFMXW64LED

LUMENS: 7,384

WATTS: 64

LUMENS PER WATT: 121

CRI: 82

CCT: 4500K

DIMMING: 10-100%

Design is Protected by US Patent D772,474




Ordering Information

CATALOG #	DESCRIPTION	VOLTS
PFMXW64LED	64 Watt LED Extra-Wide Flood Light	120-277

Options


ADD SUFFIX #	DESCRIPTION
PC	120V Photocontrol
PM	208-277V Photocontrol

Note: Atlas uses only premium LED compatible photocontrols

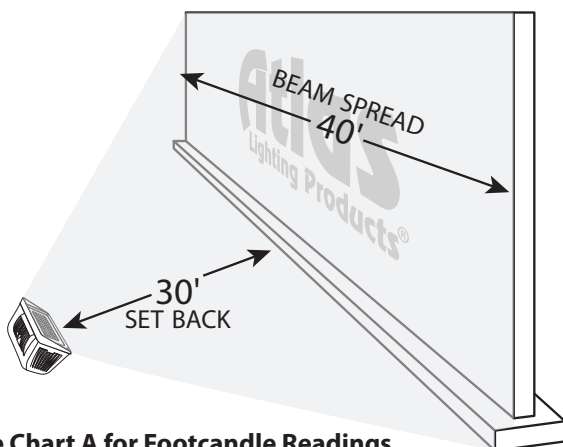

See Chart A for Footcandle Readings

FOOTCANDLE READINGS (CHART A)				
0'	5'	10'	15'	20'
6.0	5.5	4.5	3.3	2.3



200,000+ HOURS



CATALOG #	DESCRIPTION
500-082BZ	Post-Top Fitter

Performance

- Extra Wide Distribution
- Recommended for Accent Lighting
- For Short Set Backs, Signs & Wall Wash Applications
- Not for Pole Top Mounting


Dimensions and Specifications

Overall Height: 10.36"

Depth: 7.57"

Overall Width: 9.36"

Weight: 10 lbs.

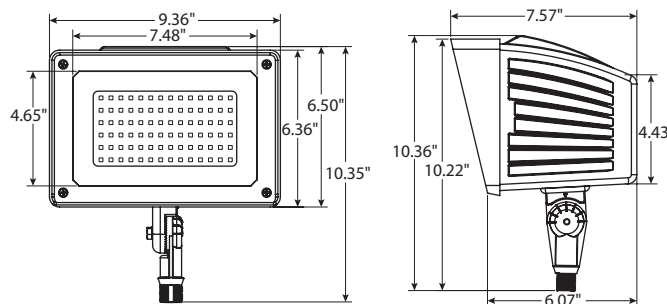

*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components

