

Extra Wide Distribution



PFSXW27LED

LUMENS: **3,311**

LUMENS PER WATT: **126**

CCT: **4500K**

WATTS: **27**

CRI: **83**

DIMMING: **10-100%**

Design is Protected by US Patent D710,530




Ordering Information

CATALOG #	DESCRIPTION	VOLTS
PFSXW27LED	27 Watt LED Extra-Wide Flood Light	120-277

Options

ADD SUFFIX #	DESCRIPTION
PC	120V Photocontrol
PM	208-277V Photocontrol

Note: Atlas uses only premium LED compatible photocontrols

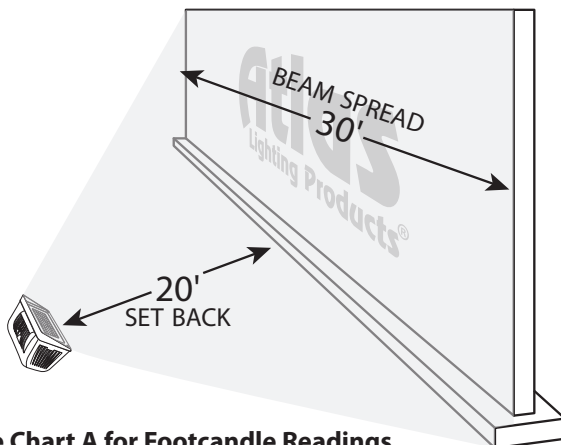

See Chart A for Footcandle Readings

FOOTCANDLE READINGS (CHART A)			
0'	5'	10'	15'
3.83	3.41	2.49	1.63



200,000+ HOURS



CATALOG #	DESCRIPTION
500-082BZ	Post-Top Fitter

Performance

- Extra Wide Distribution
- Recommended for Accent Lighting
- For Short Set Backs, Signs & Wall Wash Applications
- Not for Pole Top Mounting


Dimensions and Specifications

Overall Height: 9.36"

Depth: 7.53"

Overall Width: 6.36"

Weight: 7 lbs.

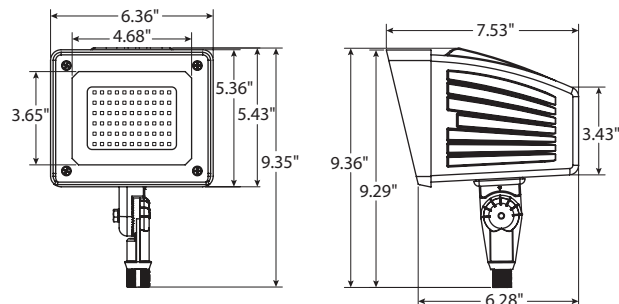

*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components

