Wall Light 64 Watt LED



Glare Free





Clare Free

Classic arm LED

MAINTAINER AND REALISMENT

Design is Protected by U.S. Patent No. 9,482,395







LUMENS: 6,966
LUMENS PER WATT: 111

CCT: 4500K

WATTS: **64**

CRI: 83

DIMMING: 10-100%

Ordering Informa	ation	Options		
CATALOG #	DESCRIPTION	VOLTO	ADD SUFFIX #	DESCRIPTION
CATALOG #	DESCRIPTION	VOLTS 120-277	PC	120V Photocontrol
WLD64LED	64W LED Wall Light		PM	208-277V Photocontrol
			EB	Emergency Back-Up
			4	480V Driver


Note: Atlas uses only premium LED compatible photocontrols

Performance


- 95% Efficient Reflector Targets the Light
- Eliminates Glare & Offensive Light
- Less Wasted Light
- More Footcandles on the Ground
- Creates a Smooth & Uniform Light Pattern

Dimensions and Specifications

Overall Height: 9.01" Depth: 9.78"
Overall Width: 18.2" Weight: 15 lbs.

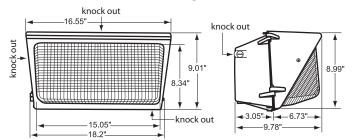

Recommended Mounting Height - 18-20 ft.



FOOTCANDLES ON THE GROUND									
Mtg.	90°			45°			Avg. FCs		
Hgt.	5'	10'	15'	5'	10'	15'	450 sq. ft.		
18'	9.6	5.8	4.2	9.5	6.1	3.6	6.5		
20'	6.8	4.8	3.4	6.6	5.2	3.4	5.0		











