

VuLite®**6" IC REMODEL HOUSING**

INCANDESCENT LAMPS

V6ICRW

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

IC Air-Loc® Remodel Housing with all 6" trims • Energy efficient, sealed housing • Can be completely covered with insulation • Includes (3) Air-Loc tape strips to cover remodel springs after installation • IC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected—see reverse.

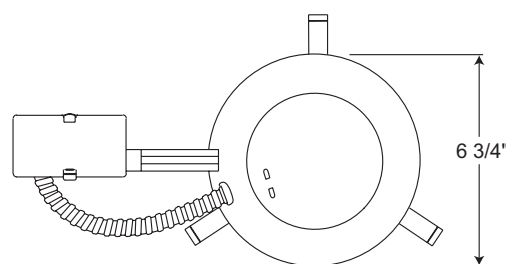
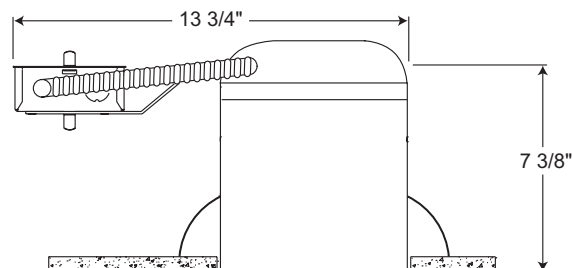
Socket Medium base porcelain socket with nickel-plated copper screw shell • Adjustable socket plate and detachable socket with snap-in springs to accommodate various lamp and trim combinations • Shipped with socket cap to protect against paint overspray.

Trims Trim selection shown on reverse.

Labels UL/cUL listed for through-branch wiring, damp locations and IP • Product thermally protected against improper use of lamps • UL/cUL Listed • Trims V3040N and V3041 are wet location approved for covered ceiling applications • Trims V3034 and V3037 are wet location approved for covered ceiling applications, **when used with outdoor rated lamps.**

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.

DIMENSIONS

6 1/4" CEILING CUTOUT

INSTALLATION

Junction Box Pre-wired junction box • Junction box provided with removable access plate, (5) 1/2" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots • Push-in electrical connectors included.

Housing IC housing, .028" aluminum sealed for Air-Loc Compliance • Remodel spring accommodate up to 1" ceiling thickness.

PRODUCT CODES



Catalog Number	Input Voltage	Lamp Rating (max.)
V6ICRW	120V	A19/PAR30/PAR30L/BR30/BR40/PAR38 (See reverse for max. trim rating)

6" IC REMODEL HOUSING

INCANDESCENT LAMPS

V6ICRW

TRIMS/LAMPS

	Cat. No.	Description	Max. Lamp Rating
	V3024W-WH	Conical White Baffle	50W PAR30, 75W PAR30L, 65W BR30
	V3024B-WH	Conical Black Baffle	
	V3025W-WH	Straight White Baffle	50W PAR30, 50W PAR30L, 75W PAR38
	V3025B-WH	Straight Black Baffle	
	V3034W-WH◆◆	Full White Baffle	40W A19 (white only), 75W PAR30, 75W PAR30L, 65W BR30, 90W BR40, 75W PAR38 (black max.)
	V3034B-WH◆◆	Full Black Baffle	
	V3034TW-WH◆◆	Full White Baffle with Torsion Springs	
	V3034TB-WH◆◆	Full Black Baffle with Torsion Springs	90W PAR38 (white only)
	V3027C-WH	Clear Cone	50W PAR30, 75W PAR30L, 65W BR30
	V3037W-WH◆◆	Full White Cone	40W A19, 75W PAR30, 75W PAR30L, 65W BR30, 75W BR40, 90W PAR38
	V3037TW-WH◆◆	Full White Cone with Torsion Springs	
	V3029-WH	White Eyeball	65W BR30, 75W PAR30L
	V3040N-PW◆	Stippled Opal Lens Shower with Reflector	34W A19, 35W PAR30
	V3041-PW◆	Drop Opal Lens Shower with Reflector	40W A19
	V3050-WH	Open Frame	65W BR30

Trim Size: 7³/₄" O.D. (except Cat. Nos. V3034, V3037 - 7⁵/₈" O.D., Cat. Nos. V3040N, V3041, V3050 - 8" O.D.).

Trim Finish: PW - Plastic White (Polycarbonate material shower trim), WH - White.

Note: In Canada when insulation is present, Type IC fixtures must be used.

◆ UL/cUL Listed for use in wet location.

◆◆ UL/cUL Listed for use in wet location with outdoor rated lamp.

AIR-LOC Vulite IC housings meet IECC Energy Code requirements per ASTM E283.

Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.