

**VuLife®****6" TC REMODEL HOUSING**

INCANDESCENT LAMPS

**V6TCRW**

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

**PRODUCT DESCRIPTION**

TC Remodel Housing designed for use in non-insulated areas • If installed where insulation is present, the insulation must be pulled back 3" from all sides of the TC housing • In Canada, when insulation is present, type IC fixture must be used • TC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs.

**PRODUCT SPECIFICATIONS**

**Lamp** Lamp ratings based on trim selected—see reverse.

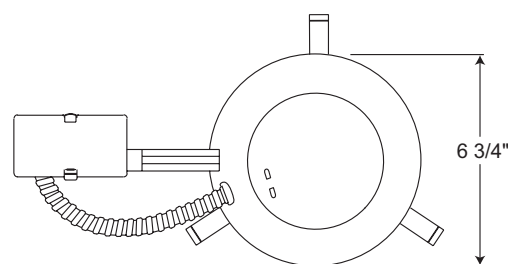
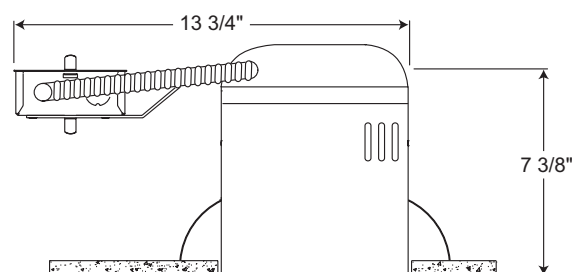
**Socket** Medium base porcelain socket with nickel-plated copper screw shell • Adjustable socket bracket and detachable socket with snap-in springs to accommodate various lamp and trim combinations • Shipped with socket cap to protect against paint overspray.

**Trims** Trim selection shown on reverse.

**Labels** UL/cUL listed for through-branch wiring, damp locations and IP • Product thermally protected against improper use of lamps or insulation • UL/cUL Listed • Trims V3020, V3040N and V3041 are wet location approved for covered ceiling applications • Trims V3034 and V3037 are wet location approved for covered ceiling applications, **when used with outdoor rated lamps.**

**Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.

**DIMENSIONS**

6 1/4" CEILING CUTOUT

**INSTALLATION**

**Junction Box** Pre-wired junction box, UL/cUL listed • Junction box provided with removable access plate, (5) 1/2" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots • Push-in electrical connectors included.

**Housing** TC housing, .028" aluminum • Remodel springs accommodate up to 1" ceiling thickness.

**PRODUCT CODES**

| Catalog Number | Input Voltage | Lamp Rating (max.)  |
|----------------|---------------|---|
| <b>V6TCRW</b>  | 120V          | A19/PAR30/PAR30L/BR30/BR40/PAR38 (See reverse for max. trim rating) |

# 6" TC REMODEL HOUSING

## INCANDESCENT LAMPS

### V6TCRW

#### TRIMS/LAMPS

|   | Cat. No.   | Description  | Max. Lamp Rating   |
|---|--|--|--|
|    | <b>V3024W-WH</b><br><b>V3024B-WH</b>   | Conical White Baffle<br>Conical Black Baffle   | 75W PAR30, 75W PAR30L,<br>65W BR30, 120W BR40,   |
|    | <b>V3025W-WH</b><br><b>V3025B-WH</b>   | Straight White Baffle<br>Straight Black Baffle   | 75W PAR30, 75W PAR30L,<br>65W BR30, 120W BR40<br>120W PAR38  |
|    | <b>V3034W-WH◆◆</b><br><b>V3034B-WH◆◆</b><br><b>V3034TW-WH◆◆</b><br><b>V3034TB-WH◆◆</b> | Full White Baffle<br>Full Black Baffle<br>Full White Baffle with Torsion Springs<br>Full Black Baffle with Torsion Springs | 60W A19 (white only), 75W PAR30,<br>75W PAR30L, 85W BR30,<br>120W BR40, 150W PAR38 (white only)<br>75W PAR38 (black max) |
|    | <b>V3027C-WH</b>   | Clear Cone   | 75W PAR30, 75W PAR30L,<br>65W BR30, 90W BR40   |
|    | <b>V3037W-WH◆◆</b><br><b>V3037TW-WH◆◆</b>  | Full White Cone<br>Full White Cone with Torsion Springs  | 60W A19, 75W PAR30,<br>75W PAR30L, 85W BR30,<br>120W BR40, 150W PAR38  |
|    | <b>V3029-WH</b>  | White Eyeball  | 75W PAR30, 75W PAR30L,<br>65W BR30   |
|  | <b>V3020-PW◆</b>   | Stippled Opal Lens Shower  | 40W A19, 75W PAR30,<br>75W PAR30L, 65W BR30,<br>75W PAR38  |
|  | <b>V3040N-PW◆</b>  | Stippled Opal Lens Shower<br>with Reflector  | 75W A19  |
|  | <b>V3041-PW◆</b>   | Drop Opal Lens Shower<br>with Reflector  | 100W A19   |
|  | <b>V3050-WH</b>  | Open Frame   | 65W BR30   |

Trim Size: 7 $\frac{3}{4}$ " O.D. (except Cat. Nos. V3034, V3037 - 7 $\frac{5}{8}$ " O.D., Cat. Nos. V3020, V3040N, V3041, V3050 - 8" O.D.).

Trim Finish: PW - Plastic White (Polycarbonate material shower trim), WH - White.

Note: In Canada when insulation is present, Type IC fixtures must be used.

◆ UL/cUL Listed for use in wet location.

◆◆ UL/cUL Listed for use in wet location with outdoor rated lamp.