

# OVR-101-LED

LED Small Square Canopy Series

**up to 65 Wattage / up to 6500 Lumens**

Catalog Number:

Project Name:

Note:

Type:




## APPLICATIONS:

The Oracle LED Canopy Light is designed to provide an aesthetically pleasing low-profile luminaire that produces a high light output while keeping energy and maintenance costs low. Ideal for parking garages, walkways, storage areas, underpasses, and stairwells.


## FEATURES:

- Sealed die-casting profile for outdoor applications
- MVOLT (120-277V)
- Lumen output from 4200-6500lm with efficacy up to 100lm/W
- Increase energy savings with optional bi-level motion sensor
- Replacing 100W MH and 175W MH saving over 75% energy consumption
- Operating temperature is -40°C to 40°C(-40°F to 104°F)
- UL/cUL wet location
- DLC premium qualified\*\*

## DIMENSION:

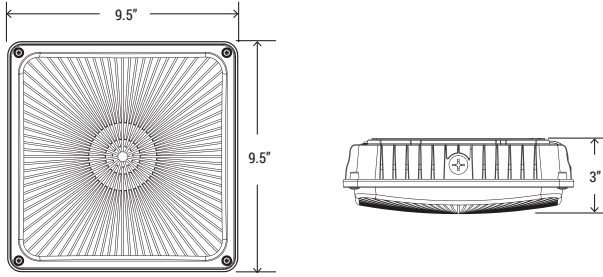

## PHOTOMETRICS:

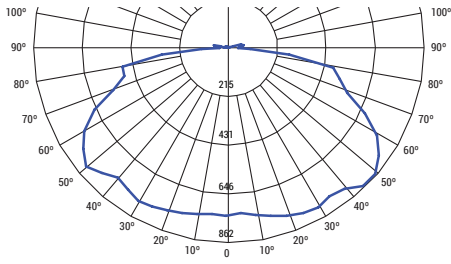

B	U	G
1	2	2



\* For list of qualified DLC fixture, please consult factory

## SPECIFICATIONS:

LUMENS	4165 / 6500 lumens
WATTAGE	45W / 65W
CCT	40K, 50K
CRI	75
LIGHT EFFICIENCY	110 lumens/watt
VOLTAGE	120-277 VAC
POWER FREQUENCY	50/60 Hz
FINISH	Bronze, White
APPLICABLE ENVIRONMENT	Dry/Damp/Wet location
WORKING TEMPERATURE	-40°C to 40°C

Ordering Guide > Example: **OVR-101-LED-6000L-DIM10-MVOLT-40K-O-EMG-LED-BZ**

SERIES	PERFORMANCE	DIMMING	VOLTAGE	CCT	FINISH	EMERGENCY	OPTION
OVR-101-LED	4000L - 4165 lumens 6000L - 6500 lumens	DIM10 - 0-10V Dimming	MVOLT - 120-277V	40K - 4000K 50K - 5000K	BZ - Bronze WH - White	O-EMG-LED	MS - Motion Sensor

\*\* DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org](http://www.designlights.org) to confirm which versions are qualified.



Submittal form is available @ [www.oraclelighting.com](http://www.oraclelighting.com)  
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions subject to change without notice.

Issued-B1118-Rev. 1