

RL631

UNIVERSAL 6" LED RETROFIT BAFFLE LIGHTING MODULE

SAME DAY
SHIPPING AVAILABLE



CERTIFICATIONS

- cULus
- RoHS
- IECC

CRI 90+ , 80+

COLOR QUALITY 3-Step MacAdam Ellipses

LUMEN OUTPUT 950, 1200 Lumens

LUMEN PER WATT Up to 64

CCT 27K, 30K, 35K, 40K, 50K

OPTIC 45° Cut-Off

WARRANTY 5 Years

- New York state
- UL/cUL Listed for Wet
- UL/cUL Listed for Damp Location
- California Title 24
- Washington state
- LM79/LM80

UNIQUELY ENGINEERED FOR NEW AND EXISTING CONSTRUCTION

The RL631 is the newest, most efficient, and advanced LED retrofit modules from ELITE Lighting. It's unique design delivers color quality above a 90 CRI rating. The color matching has never been so close, with a binning as low as 3 MacAdams ellipses. The RL631 LED retrofits meet all new mandatory California Title 24 requirements.

The Elite RL631 LED Module has been engineered for new constructions to meet Title-24's "No Edison Socket" mandate. The Elite RL631 LED system works in our dedicated (LD6IC-AT and LD6RIC-AT) housings and our existing 6" Incandescent housings (B6IC-AT, EZ6IC-AT, B26IC-AT, B26RIC-AT, B6RIC-AT) but is also suitable for using in most 6" Incandescent recessed downlight housings in the market.

INPUT VOLT.	INPUT FREQ.	THD	POWER FACTOR	INPUT POWER	LUMENS
120	50/60Hz	<20%	>0.9	15W(+/-5%)	1200
120	50/60Hz	<20%	>0.9	14W(+/-5%)	950

DURABILITY

Our die-cast system pulls the heat from the LED chip, allowing the continued cool operation for years. Our LED driver is rated for 50 to 60 Hz at 120V input, and produces less than 20% THD, has a power factor between 0.90 and 1.00 and is thermal protected for additional safety.

DIMMABLE


The Elite LED Module is dimmable down to 15% of initial light output with compatible dimmers. Consult factory for complete list of compatible dimming systems.

OUR WORD

The Elite LED lighting system carries a five-year carefree warranty for parts and components. (Labor not included)

FEATURES

- Over 1200 usable lumens are directed from the luminaire to the work surface
- Greater light output than a 26W CFL or a 65W BR30 while consuming less than 15W of power
- Rated at 90+ CRI to meet California Title-24 strict compliance standards
- Life tested to ensure light output up to 36,000 hours of operation to L70
- Glare reducing cut-off angle of 55 degrees
- High performance optic hides LED chip image but still delivers an even beam of light
- Elite's highly selective LED chips produce zero ultraviolet and virtually no infrared light
- Tested to LM-79 and LM-80 standards
- UL listed for safety

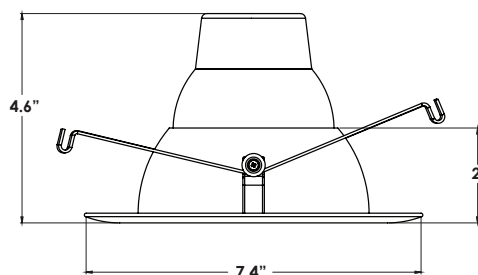

INSTALLATION

Ez connector to use with special High efficacy housing or Edison base adapter for retrofitting into existing 6" incandescent housings.

- Utilizes industry standard V springs, installs in most 6" incandescent downlights.
- Insert V springs into can and press trim to ceiling.

LED
6"

6 INCH LED RETROFIT MODULE

RL631

UNIVERSAL 6" LED RETROFIT BAFFLE LIGHTING MODULE




Elite's innovative LED retrofit downlight modules deliver the brightest, most beautiful and most energy efficient ambient lighting to replace any lamp type on your existing fixture.

Example: **RL631-950L-DIMTR-120-30K-90-W-WH**

TYPE	LUMEN SERIES	CCT	CRI	FINISH	OPTION	TRIM OPTIONS	
RL631 (Baffle)	<input type="checkbox"/> 950L-DIMTR-120 <input type="checkbox"/> 1200L-DIMTR-120	<input type="checkbox"/> 27K <input type="checkbox"/> 30K <input type="checkbox"/> 35K <input type="checkbox"/> 40K <input type="checkbox"/> 50K (CRI 80+ Only)	<input type="checkbox"/> 90+ <input type="checkbox"/> 80+	<input type="checkbox"/> W-WH	<input type="checkbox"/> GU24SA GU24 SOCKET ADAPTER	BT (Baffle Trim) <input type="checkbox"/> RL631-BT-BZ-BZ <input type="checkbox"/> RL631-BT-CP-CP <input type="checkbox"/> RL631-BT-P-BK <input type="checkbox"/> RL631-BT-P-WH <input type="checkbox"/> RL631-BT-SN-SN	RT (Reflector Trim) <input type="checkbox"/> RL631-RT-BZ-BZ <input type="checkbox"/> RL631-RT-CL-WH <input type="checkbox"/> RL631-RT-CP-CP <input type="checkbox"/> RL631-RT-MB-BK <input type="checkbox"/> RL631-RT-MB-WH <input type="checkbox"/> RL631-RT-RG-WH <input type="checkbox"/> RL631-RT-SHZ-SHZ <input type="checkbox"/> RL631-RT-SHZ-WH <input type="checkbox"/> RL631-RT-SN-SN <input type="checkbox"/> RL631-RT-SN-WH <input type="checkbox"/> RL631-RT-W-WH

AVAILABLE COLOR INSERTS FOR RL631 - 6" RETROFIT

BAFFLES




RL631-BT-P-BK



RL631-BT-BZ-BZ



RL631-BT-SN-SN



RL631-BT-P-WH



RL631-BT-CP-CP

REFLECTORS



RL631-RT-SHZ-WH



RL631-RT-RG-WH



RL631-RT-CP-CP



RL631-RT-BZ-BZ



RL631-RT-CL-WH



RL631-RT-W-WH



RL631-RT-SHZ-SHZ



RL631-RT-MB-WH



RL631-RT-SN-SN



RL631-RT-MB-BK



RL631-RT-CL-CH

Ordering Guide for Compatible Housing

IC - New Construction	Non-IC New Construction	IC - For Remodel	Non-IC For Remodel
LD6IC	LD6-AT	LD6RIC-AT	LD6R-AT
HLD6IC-AT	HLD6-AT	HLD6RIC-AT	HLD6R-AT
LD600IC-AT	B6-AT	EZ6IC-AT	B6R-AT
EZ6IC-AT		B6RIC-AT	
B6IC-AT			
B6IC-100-AT			
B600-IC			

*RECOMMENDED DIMMERS FOR ELITE RL631 LED SYSTEM

LUTRON DIMMERS		LUTRON CONTROL SYSTEM
INCANDESCENT		MAGNETIC LOW VOLTAGE
Diva DVCL-153P	Maestro MRF2-GND	NovaNLV-600
Skylark CTCL-153P	NovaT NTELV-600	NovaT NTLV-600
Nova N-600	Diva DVELV-300P	Diva DVLV-600P
NovaT NT-600	Skylark SELV-300P	Leviton Dimmer 6613-PL
Skylark S-600	Nova NELV-450	
Ariadni AY-600P	Skylark S-1000	
Nova NTLV-600	Decora 06633-766	
Nova NLV-600	Decorra 6674	
	Toggle Dimmer TGI06-1LW	