

LITEPAK Compact LED Wallpack – Zero Uplight

The compact LED LNC2, slightly larger than the LNC is designed for perimeter illumination for safety, security and general lighting application.

- IES Progress Award Winner - 2013 and Building Operating Management 2014 Top Products Award - LNC2-18LU
- DesignLights Consortium (DLC) qualified (Types III and IV), Consult DLC website for more details: <http://www.designlights.org/QPL>
- Zero-uplight, neighbor friendly
- Mounting height up to 15 feet and 60ft fixture spacing (without acrylic diffuser) and 40ft spacing with acrylic diffuser installed
- Available in four lumen packages, replaces up to 150W+

- Features long-life (60,000hr L96 rated), high CRI, 3000K, 4000K, and 5000K LEDs
- Includes quick-mount adapter
- Acrylic diffuser softens high angle output for use at entrances or pedestrian pathways
- Battery backup option in 12L versions for egress applications
- Photocell and occupancy sensor options available for complete on/off and dimming control
- Factory installed back box on BBU and motion sensor units (options cannot be combined)
- Listed to UL1598 for use in wet locations



*3000K and warmer CCTs only

LED WALLPACKS

STOCK ORDERING INFORMATION

Catalog Number	System Watts	Delivered Lumens	Voltage	CCT	# Drivers/Current	Mounting Height	Weight lbs. (kg)	PKG. CODE
LNC2-12LU-4K-3-1	28.6w	2662	120-277V	4000K	1@700mA	up to 15 ft	7.0 (13.3)	FCC
LNC2-12LU-5K-3-1	28.6w	2868	120-277V	5000K	1@700mA	up to 15 ft.	7.0 (13.3)	FCC
LNC2-12LU-5K-3-1-PC-U	28.6w	2868	120-277V	5000K	1@700mA	10-12 ft.	7.0 (13.3)	FCC
LNC2-18LU-4K-3-1	44.5w	3806	120-277V	4000K	2@700mA	up to 18 ft	7.0 (13.3)	FCC
LNC2-18LU-5K-3-1	44.5w	4106	120-277V	5000K	2@700mA	up to 18 ft.	7.0 (13.3)	FCC
LNC2-18LU-5K-3-1-PC-U	44.5w	4106	120-277V	5000K	2@700mA	up to 18 ft.	7.0 (13.3)	FCC



10-Day Quick-Ship Ordering Guide

Order Limit Per Luminaire Selection: 15 (Contact factory for larger quantities) – BC Pkg Code

LNC2 - [] - [] - [] - [] - [] - [] - [] - []

SERIES	NUMBER OF LEDS/SOURCE/VOLTAGE	CCT	IES DISTRIBUTION	FINISH	OPTIONS
LNC2 LNC2 Zero uplight	12LU 12 LEDs, 29w input, Universal voltage 120-277V 18LU 18 LEDs, 42w input, Universal voltage 120-277V	4K 4000K nominal 5K 5000K nominal	3 Type III 4 Type IV	DB Dark Bronze Textured BL Black Textured GR Gray Textured WH White Textured PS Platinum Silver Smooth GYS Light Gray Smooth	PCU Button photocontrol, 120V-277V

MADE-TO-ORDER ORDERING INFORMATION – (BC PKG CODE)

LNC2 - [] - [] - [] - [] - [] - [] - [] - []


SERIES	NUMBER OF LEDS/SOURCE/VOLTAGE	CCT	IES DISTRIBUTION	FINISH	OPTIONS
LNC2 LNC2 Zero uplight	5LU 5 LEDs, 120-277V 7LU 7 LEDs, 120-277V 9LU 9 LEDs, 120-277V 12LU ⁴ 12 LEDs, 120-277V 18LU 18 LEDs, 120-277V 12L5 12 LEDs, 480V 12L6 12 LEDs, 347V	3K ³ 3000K nominal 80 CRI 4K 4000K nominal 70 CRI 5K 5000K nominal 67 CRI AM ¹ Amber (590 μm available for "Turtle Friendly"/observatory applications, 350mA; consult factory (18L version only)	2 ³ Type II 3 Type III 4 Type IV	DB Dark Bronze Textured BL Black Textured GR Gray Textured WH White Textured PS Platinum Silver Smooth GYS Light Gray Smooth	PC(X) Button photocontrol, U-120-277V 2-208V, 3-240V, 4-277V BBU ² Integral battery for 12L only (must specify 120V or 277V voltage in voltage category) rated for -20°C to 30°C SCP Programmable occupancy sensor

- 1 Amber LEDs only available on 18LU configurations, 350 mA only; Universal Voltage 120V-277V
- 2 Battery backup only available 12L models, not available for Canada
- 3 Does not qualify for DLC
- 4 Replace U with 1 for 120V or 4 for 277V for 12L with BBU

SPECIFY SCP HEIGHT

- 8F Up to 8ft mount height
- 20F Up to 20ft mount height

DIMENSIONS

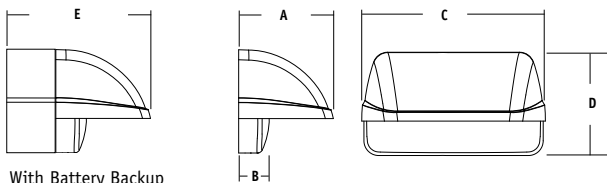

A	B	C	D	E	Weight	Weight w/BBU
6.25"	1.6"	10.25"	5.6"	10.25"	7.0 lbs.	15.0 lbs.
158.7 mm	40.2 mm	260.4 mm	142.2 mm	260.4 mm	3.2 kg	6.8 kg



HUBBELL Outdoor Lighting