

Туре

HUBBELL Outdoor Lighting

Approvals

APPLICATIONS

Perimeter lighting for safety and security. High performance with wide lateral spread

Cat.#

Job

SPECIFICATIONS

- Cast aluminum door frame with prismatic glass refractor. Door seals to housing gasket with twin Hubbell Gard[®] captive fasteners
- Die cast aluminum housing allows firm mounting over recessed junction boxes or on flat surfaces for 1/2" surface conduit. Casting dissipates ballast heat for long life. Top hub supplied for field installation of button photo control, ordered separately
- Specular aluminum reflector with kicker panels drive maximum lamp lumens to the refractor prisms. Vertical socket position with these optics provide six to one spacing to mounting height ratio for maximum spacing or better uniformity, greater lumens and lamp life
- PGM features 100-250W pulse start metal halide. Many listings include lamp for contractor convenience; see standard selections below
- Dark bronze 800 Series powder paint finish standard on frame and housing. For optional finishes, black, gray, white and platinum consult factory

ELECTRICAL

 10kA surge protection (parallel); Automatically takes fixture off-line when device is consumed

LISTINGS

Listed to UL1598 for use in wet locations




STOCK ORDERING INFORMATION

ORDERING EXAMPLE: PGM3-150P-18-BZ

Catalog Number	Wattage	Lamp Type	Voltage	Ballast	Lamp Included/Base	Weight Ibs. (kg)
Pulse Start Metal Halide						
PGM3-100P-18-BZ-L	100	PSMH	Quad Tap	HX-HPF	Yes/Med.	25 (11.3)
PGM3-250P-18-BZ	250	PSMH	Quad Tap	CWA-HPF	No/Mog.	27 (12.2)
PGM3-250P-18-BZ-L	250	PSMH	Quad Tap	CWA-HPF	Yes/Mog.	27 (12.2)


Notes: • L - Indicates lamp included with the fixture

CONFIGURABLE ORDERING INFORMATION

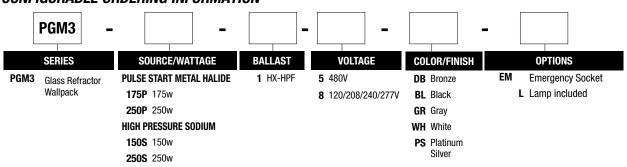







ORDERING INFORMATION

ACCESSORIES - Order Separately

Catalog Number	Description		
PBT-1	Photocontrol, button type, 120V		
PBT-234	Photocontrol, button type, 208, 240, 277V		
PG-PS ¹	Polycarbonate shield for refractor		
PG-WG ¹	Wire guard for refractor		
PVL3V	Full cut-off visor, formed aluminum, bronze finish		

1 Guard and shield can be used on the same fixture

REPLACEMENT PARTS

Catalog Number	Description			
80033990104	Aluminum/glass front, bronze (glass conversion)			

