


**IMPORTANT SAFETY INFORMATION. READ AND FOLLOW ALL SAFETY INSTRUCTIONS.** Follow label information and instructions concerning Wet or Damp Locations, installation near combustible materials, insulation, building materials, and proper lamping. Do not install in areas subject to combustible vapors or gases. Before wiring to power supply and during servicing or relamping, turn off power at fuse or circuit breaker. **All servicing or relamping must be performed by qualified service personnel. Product must be grounded to avoid potential electric shock or other potential hazard. Product must be mounted in locations and at heights and in a manner consistent with its intended use, and in compliance with the National Electrical Code and local codes.** The use of accessory equipment not recommended by the manufacturer or installed contrary to instructions may cause an unsafe condition. Do not block light emanating from product in whole or part, as this may cause an unsafe condition. Do not allow items such as drapes, curtains, screens or the like to come into contact with the product or to block light from the product, as this may cause an unsafe condition. **WARNING** - This product contains chemicals known to the State of California to cause cancer, birth defects and/or other reproductive harm. Thoroughly wash hands after installing, handling, cleaning, or otherwise touching this product.

## INSTALLATION INSTRUCTIONS TL63

**CAUTION:** All glass is fragile, use care when handling lamp and glass diffuser.

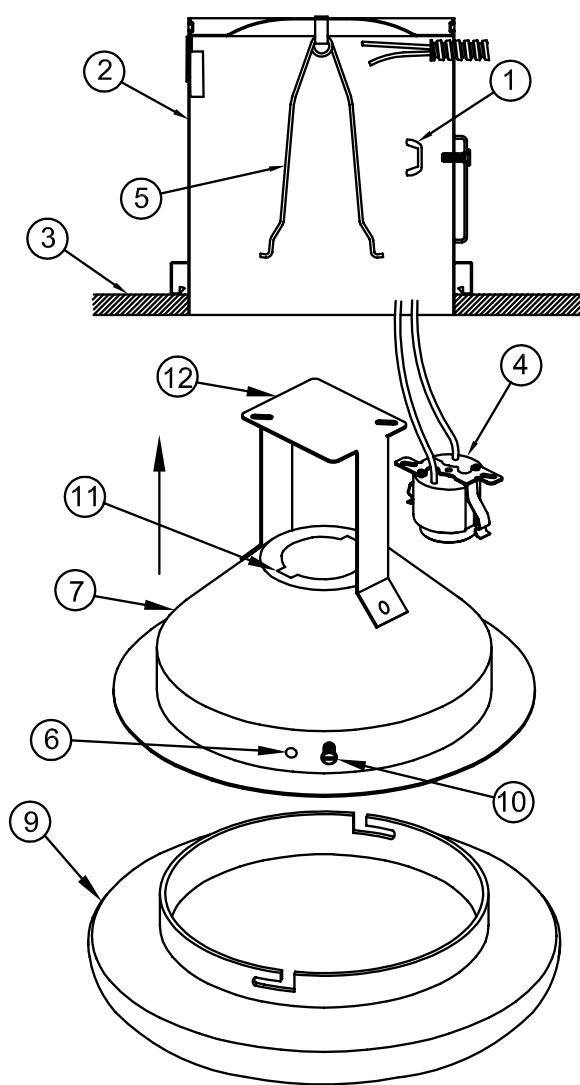

1. To adjust fixture to correct thickness, loosen the Wingnut (1) inside the Housing (2) and lower the Housing until the bottom edge is flush with the Ceiling (3). Then re-tighten the Wingnut.
2. Slide Socket (4) down along length of Mounting Spring (5) and remove. Attach ends of Mounting Spring (5) to rectangular slots in Mounting Bracket (12). Attach Socket (4) to Reflector (7). Compress Socket Spring Legs while inserting into slots (11) of opening in top of Reflector (7). Then release.
3. Install applicable Lamp (NOT FURNISHED), as per wattage information inside Housing (2). Install Diffuser (9). Align Notches (8) in Diffuser (9) with Studs (6) in reflector (7). Gently turn Diffuser Clockwise (to the right) to secure in place.
4. Tighten Safety Screw (10) to prevent Diffuser (9) from backing out of Reflector (7).
5. Push Diffuser (9) upward until flush with Ceiling (3).
6. To relamp fixture, pull Diffuser (9) down, loosen Safety Screw (10), and gently turn Diffuser counterclockwise (to the left) to remove from Reflector. **BE CAREFUL NOT TO TURN OR TWIST REFLECTOR.**

