

**IMPORTANT SAFETY INFORMATION. READ AND FOLLOW ALL SAFETY INSTRUCTIONS.** Follow label information and instructions concerning Wet or Damp Locations, installation near combustible materials, insulation, building materials, and proper lamping. Do not install in areas subject to combustible vapors or gases. Before wiring to power supply and during servicing or relamping, turn off power at fuse or circuit breaker. **All servicing or relamping must be performed by qualified service personnel. Product must be grounded to avoid potential electric shock or other potential hazard. Product must be mounted in locations and at heights and in a manner consistent with its intended use, and in compliance with the National Electrical Code and local codes.** The use of accessory equipment not recommended by the manufacturer or installed contrary to instructions may cause an unsafe condition. Do not block light emanating from product in whole or part, as this may cause an unsafe condition. Do not allow items such as drapes, curtains, screens or the like to come into contact with the product or to block light from the product, as this may cause an unsafe condition.

**WARNING** - This product contains chemicals known to the State of California to cause cancer, birth defects, and/or other reproductive harm. Thoroughly wash hands after installing, handling, cleaning, or otherwise touching this product.

## INSTALLATION INSTRUCTIONS LD6\_D SERIES

### INSTALLATION

1. Insert supplied #8-32 x 1/2" screws into supplied S-4 strap through tapped holes located 2-3/4" apart in orientation shown in Fig. 1. (Holes in fixture canopy must line up with these screws.)
2. Mount strap to outlet box with screws (by others) with screw stems facing outward. Rotate strap to adjust fixture to correct position.
3. Connect supply wires: Black to Line, White to Common, Green to Ground. (DM only: Connect Gray (+) and Violet (-) to appropriate 0-10V dimming control per National Electrical Code and local codes.
4. Secure fixture canopy with two mounting nuts supplied.
5. Fixtures used in wet locations, place the two supplied o-rings under the heads of the mounting screws and secure mounting nuts. Area around fixture canopy and mounting surface must be sealed.

### LIGHT ENGINE REPLACEMENT

1. Remove lensed reflector assembly by pulling from the edges. Reflector assembly is held by a safety cable.
2. Loosen captive screw holding the light engine. Carefully lower and disconnect light engine connector from driver connector. See Fig. 2.
3. Connect replacement light engine connector to driver connector and line up light engine heat sink fins with mounting bracket until seated into place and tighten captive screw.
4. Reinstall reflector assembly.

### LED DRIVER REPLACEMENT

1. Remove lensed reflector assembly by pulling from the edges. Reflector assembly is held by a safety cable.
2. Loosen captive screw holding the light engine. Carefully lower and disconnect light engine connector from driver connector. See Fig. 2. Set aside.
3. Remove driver bracket mounting screw attaching safety cable and remove reflector assembly. Set aside.
4. Remove remaining driver bracket mounting screws and lower driver bracket. Disconnect all driver wiring and replace driver by removing driver mounting screws. See Fig. 2.
5. Mount replacement driver and reconnect wiring according to installation step 3.
6. Reinstall driver bracket and safety cable holding reflector assembly using mounting screws. Reconnect light engine connector to driver connector and line up light engine heat sink fins with mounting bracket until seated into place and install with captive screw.
7. Reinstall reflector assembly.

**NOTE:** Do not pinch LED wires between the sliding parts.

**KEEP THESE INSTRUCTIONS**

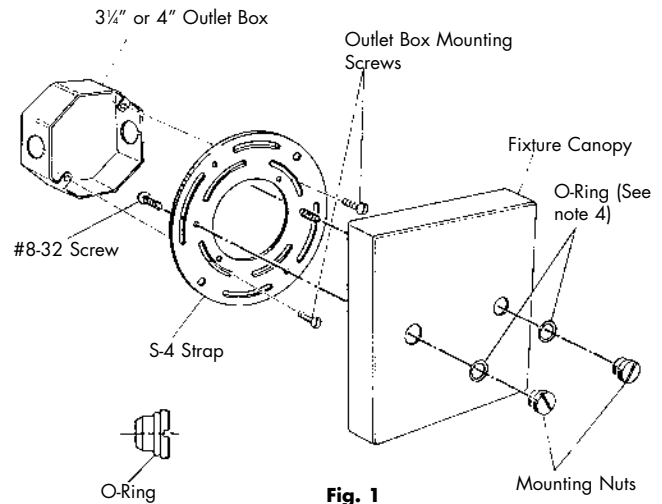


Fig. 1

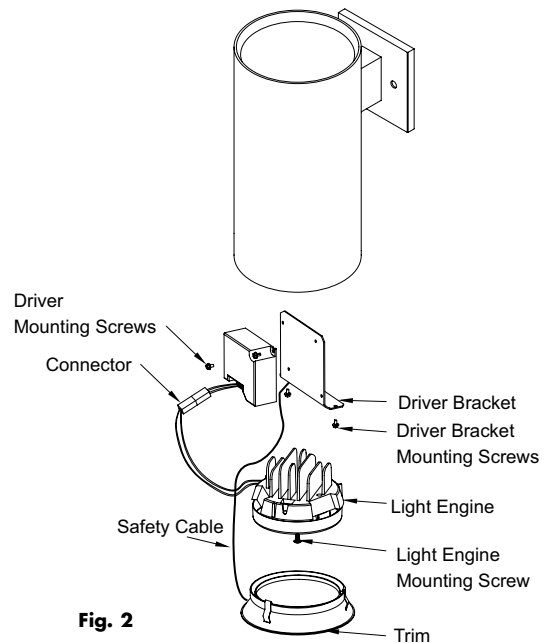


Fig. 2

