




4515 East 139th Street
 Grandview, MO 64030
 (800) 362-9055
 Fax (800) 362-1463
 www.PRIER.com

P-154/254 Series Freezeless Wall Hydrant

With Integral P-003 Vacuum Breaker

Application

P-254 Loose Key Design

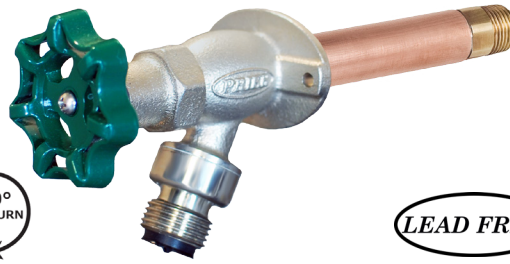

- Residential
- Freezeless
- Anti-Siphon
- Backflow Check Valve
- Lead Free




PRIER P-154 provides a year round source of water to areas of structures that are subject to freezing temperatures. The hydrant is connected to the supply piping in the heated portion of the structure, eliminating the possibility of freezing. Ordering the P-254 gives you the same style hydrant but with a vandal proof extended lockshield and operating key.

The PRIER P-154 has all the characteristics of the historically proven C-134 with the added protection of an anti-siphon vacuum breaker and backflow check valve. It is available from stock in lengths from close coupled to 24", longer sizes are available on request.

Features

- ASSE and C-UPC approved
- Anti-siphon vacuum breaker with backflow check valve
- Body and seat composed of solid lead-free brass (PB<0.25%)
- Integral cast flange with built-in drainage pitch
- Enclosed screw holes easily secure mounting screws
- Solid brass body, valve stem cap, seat and stem ends
- Satin nickel plated body maintains attractive finish
- Stainless steel seat washer screw and handle screw
- Powder coated cast aluminum handle
- Durable ACME threads secure stem at seat end
- AFG teflon with graphite packing for easy maintenance
- Standard "OO" size seat washer
- Spout aligning mark
- Slim seat inlet for easier installation


Inlet Styles



D Style
 1/2" MPT x 1/2" SWT



T Style
 3/4" MPT x 1/2" FIP



S Style
 1/2" SWT x 3/4" Push-On




F Style
 3/4" MPT x 3/4" SWT



X Style
 1/2" Crimp PEX



FX Style
 3/4" Crimp PEX



W Style
 1/2" Wirsbo® PEX



FW Style
 3/4" Wirsbo® PEX



C Style
 1/2" CPVC Glue-In



G Style
 1/2" Push-Fit

Ordering

P-154D10

Operator

- 1- Handle Operated
- 2- Vandal Proof Lockshield

Inlet

- D- 1/2" MPT x 1/2" SWT
- F- 3/4" MPT x 3/4" SWT
- S- 1/2" SWT x 3/4" Push-On
- T- 3/4" MIP x 1/2" FIP
- W- 1/2" Wirsbo PEX®
- C- 1/2" CPVC Glue-In
- X- 1/2" Crimp PEX
- FX- 3/4" Crimp PEX
- FW- 3/4" Wirsbo PEX®
- G- 1/2" Push-Fit


Length

- CC- Close Coupled
- 04- 4" Insertion
- 06- 6" Insertion
- 08- 8" Insertion
- 10- 10" Insertion
- 12- 12" Insertion
- 14- 14" Insertion
- 16- 16" Insertion
- 18- 18" Insertion
- 20- 20" Insertion
- 22- 22" Insertion
- 24- 24" Insertion
- XX- Special Size



4515 East 139th Street
 Grandview, MO 64030
 (800) 362-9055
 Fax (800) 362-1463
 www.PRIER.com

Replacement Parts

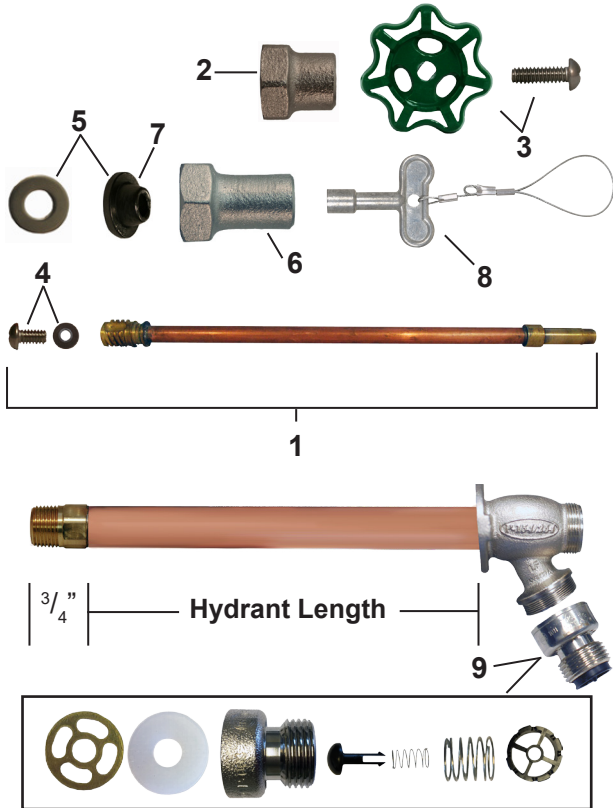

ID	Part No.	Description
1	See Below	Stem Assembly, Contains: 1, 4
2	300-1008	Valve Stem Cap
3	C-134KT-805	Handle and Screw Kit
4	C-134KT-802	Seat Washer Replacement Kit (00 Beveled)
5	C-134KT-803	Stem Packing Replacement Kit
6	310-1015	Valve Stem Cap for Loose Key
7	390-1001	Stem Packing Only
8	C-108KT-808	Key on Lanyard
9	P-154KT-806	Replacement Vacuum Breaker
	C-134KT-804	Handle to Loose Key Conversion Kit Contains: 5, 6, 8
	C-234KT-804	Loose Key to Handle Conversion Kit Contains: 2, 3, 5
	P-154KT-807	P-154 Overhaul Kit Contains: 3, 4, 5, 9

Replacement Stems



G Style Manufactured April 2013 - Present

Part No.	Style	Description	Stem Length
P-231-11CC	G	Close Coupled Stem for P-154 Hydrant	4 ³ / ₈ " OAL
P-231-1104	G	Stem for 4" P-154 Hydrant	6 ⁷ / ₈ " OAL
P-231-1106	G	Stem for 6" P-154 Hydrant	8 ⁷ / ₈ " OAL
P-231-1108	G	Stem for 8" P-154 Hydrant	10 ⁷ / ₈ " OAL
P-231-1110	G	Stem for 10" P-154 Hydrant	12 ⁷ / ₈ " OAL
P-231-1112	G	Stem for 12" P-154 Hydrant	14 ⁷ / ₈ " OAL
P-231-1114	G	Stem for 14" P-154 Hydrant	16 ⁷ / ₈ " OAL
P-231-1116	G	Stem for 16" P-154 Hydrant	18 ⁷ / ₈ " OAL
P-231-1118	G	Stem for 18" P-154 Hydrant	20 ⁷ / ₈ " OAL
P-231-1120	G	Stem for 20" P-154 Hydrant	22 ⁷ / ₈ " OAL
P-231-1122	G	Stem for 22" P-154 Hydrant	24 ⁷ / ₈ " OAL
P-231-1124	G	Stem for 24" P-154 Hydrant	26 ⁷ / ₈ " OAL
P-231-11US	G	*Universal Replacement Stem for P-154 Hydrant	Up to 16 ⁷ / ₈ " OAL