SPEAKMAN® Eyesaver® Faucet with Eyewash/Drench Hose

SEF-9000

SPECIFICATION



FEATURES:

EYEWASH

- Eyewash is connected to Speakman SC-5811-RCP service sink faucet's cold water integral stop port supply
- Activated by squeeze valve with automatic stay open device
- (2) yellow plastic spray heads with flip top dust caps
- 3.06 gpm @ 30 psi performance (eyewash only)
- 2.66 gpm @ 30 psi (with sink on)
- Integral vacuum breaker and check valve

SERVICE SINK FAUCET

- 1/2 in. NPT female inlets supply
- Vandal resistant four-arm handles with color coded indexes
- Perfect® valves with 1/4 turn ceramic cartridges
- 4 gpm (min) @ 20 psi
- Cast brass nozzle with 3⁄4 in. hose thread, pail hook and top brace outlet
- Integral vacuum breaker

COMPLIANCE:

- ASME A112.18.1/CSA B125 certified
- Certified to ANSI/ISEA Z358.1
- ASSE -1001 (service sink)

- 4 in. wrist blade handles for service sink 🛛 -4WH
- 5 ft. hose with hook 🛛 -5H
- Addition of SE-370 thermostatic mixing valve 🛛 -TW

WARRANTY:

- 3 year limited
- Ceramic cartridges covered by 25-year warranty

SEE REVERSE FOR ROUGH-IN DIMENSIONS

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.



WWW.SPEAKMANCOMPANY.COM




Management Systems Registered to ISO 9001

REVISION DATE: JUNE 2014

SPEAKMAN® Eyesaver® Faucet SEF-9000

SPECIFICATION

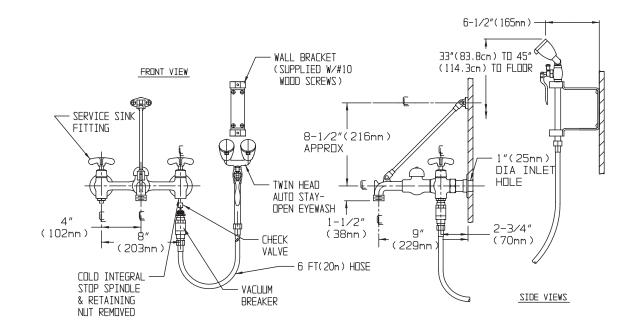

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.



WWW.SPEAKMANCOMPANY.COM



Management Systems Registered to ISO 9001

REVISION DATE: JUNE 2014

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.