



## SUMMARY INSTALLATION - 6 SIMPLE STEPS - LOCKE LUXE FLOW

Model # LF-2 (E1100)

1.

Using plain water only, Moisten O-Rings at the top of the Filter Cartridge. Keep clean. Remove any debris and Insert Filter Cartridge into the Filter Head and lock into place

Page 5

1.




2.

Make the Connections of the White Tubing into the inlet and the Blue Tubing into the outlet following the flow arrow. Caution: Make sure to insert all tubing completely.

Page 5

2.

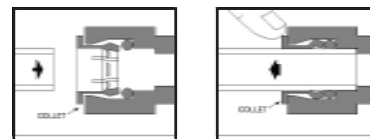


3.

Connect to Supply - the White Tubing using the Chrome & White Fitting to the angle stop or shut off valve to the cold water under the sink

Page 6

3.




4.

Connect to Faucet - the Blue Tubing to the cold side of the faucet using the grey nut and brass adaptor for most faucets (version #1) or the grey nut only for older faucets (version #2)

Page 6

4.1  
version #1



placement of fitting  
between the faucet  
and the Max Flow  
connection



4.2  
version #2



needs this fitting  
only to connect to  
faucet



connection from the faucet  
to Max Flow using  
included grey fitting only  
with inserted blue tubing

5.

Screw Bracket onto the Filter Head and Hang system

Page 7

5.




6.

Start-Up and Flush the System:

Turn on the cold water side of the faucet and slowly open the shut off valve under the sink

Allow system to start itself up, get a good flow from the cold water side of the faucet, flush the new filter and check your connections

Set a reminder in your smart phone  
or calendar to replace your filter



### Please Note:

All pictures for illustration purposes only. Your supply connection and the filter head and bracket may be different for your application