

PVC Coated Elbows

Catalog Number: EL-075X90 **UPC:** 736953002944





Description

3/4X90 PVC Coated Standard Elbow

Factory-bent PVC coated elbows are more accurate, quicker to install and more economical because they eliminate field bending time and waste of material. Electrical continuity is maintained across assembled joints.

Application

- Factory-bent for accurate, quicker to install and eliminates costly field bending and waste of material
- Factory-bent for accurate, quicker to install and eliminates costly field bending and waste of material


Features

- 12 trade sizes from 1/2" through 6"
- 2 mil green urethane interior coating
- 40 mil gray PVC exterior coating
- Available in standard sizes 90°, 60°, 45°, 30° bends
- · Color-coded thread protector caps for quick identification of conduit size

General

Exterior Finish:	A nominal .040 inch (40 mil) gray PVC coating
Interior Finish:	A nominal .002 inch (2 mil) green urethane
Material:	STEEL
Thread Finish:	A green urethane coating over steel
Thread Protector Color:	Red
Dimensions	
Metric Size Designators	21

•	
Nipple Length (Inches)	12-1/2
Diameter - External (Inches)	1.13
Diameter - Internal (Inches)	0.836
Radius A (Inches)	3.94
Radius B - Standard (Inches)	4.5
Radius C (Inches)	5.07
Offset D (Inches)	6.685
Offset E (Inches)	7.25
Offset F (Inches)	7.815
Tangent (Inches)	2.75

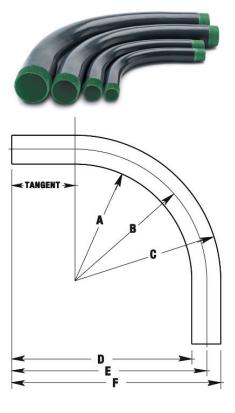



PVC Coated Elbows

Catalog Number: EL-075X90 **UPC:** 736953002944

C (UL) US



Technical / Specification Documents

Specification Guide (1995 Master)	AVAILABLE ON WEBSITE
Specification Guide (2004 Master)	AVAILABLE ON WEBSITE
Installer Certification and Tools	AVAILABLE ON WEBSITE
Chemical Resistance Charts	AVAILABLE ON WEBSITE
Performance Specifications	AVAILABLE ON WEBSITE

Standards

UL 6:	E2314
CSA Certified:	C22.2 No. 45

Notes

Both PVC and zinc coatings have been investigated as primary protection against corrosion.

Restricted for use with threaded fittings only.