


## For Residential and Commercial Applications


Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

## BRPX1901 Multi-Turn Dual Outlet Stop – Barbed PEX (Inlet) x Compression x Compression

**Use:** For use with water in accessible locations only. Not intended for recirculating systems that produce continuous use temperatures above 115° F. For those applications, use our KT™ series ball stop.

**Design Features:**

- **Machined one-piece brass body** provides strength, durability, and long-lasting performance
- **Knurled oval handle** provides a secure grip and smooth on/off operation
- **Easy-to-remove handle** with screw attachment helps protect against accidental stop operation during rough-ins
-  **No Lead**
- **PEX end** designed to ASTM F1807
- **For use with** ASTM F876 PEX tubing, in ASTM F877 water distribution systems using ASTM F1807, and/or F2098 connection methods

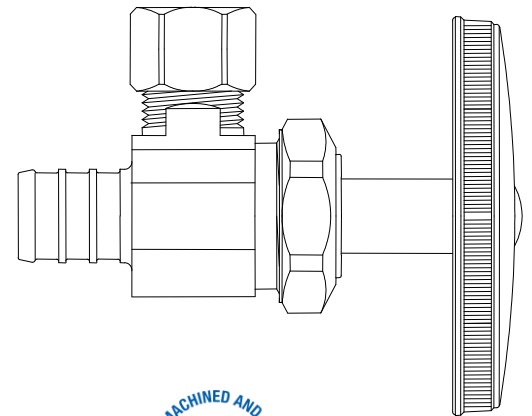

**Operating Specifications:**

**Temperature:** 40° - 140° F  
**Pressure:** 125 PSI maximum

**Standard**

STOP MATERIAL SPECIFICATIONS	
Valve Body	Brass
Stem	POM
Bib & Packing Washers	Rubber
Packing Nut	Brass
Handle	Polycarbonate
Handle Screw	Steel, plated
Plastic Sleeve	Plastic
Compression Nut	Brass
Compression Sleeve	Brass

**No Lead**

STOP MATERIAL SPECIFICATIONS	
Valve Body	No-Lead brass
Stem	POM
Bib & Packing Washers	Rubber
Packing Nut	Brass
Handle	Polycarbonate
Handle Screw	Steel, plated
Plastic Sleeve	Plastic
Compression Nut	Brass
Compression Sleeve	Brass

**Standard Part Listing:**

- ☐ BRPX1901LR R1 1/2" nom crimp barb (for PEX) x 3/8" OD compression x 3/8" OD compression, rough brass, window tray


**No-Lead Part Listing:**

- ☐ BRPX1901LRX R1 1/2" nom crimp barb (for PEX) x 3/8" OD compression x 3/8" OD compression, rough brass, window tray

*This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.*

**BrassCraft®**

# BRPX1901 Multi-Turn Dual Outlet Stop – Barbed PEX (Inlet) x Compression x Compression

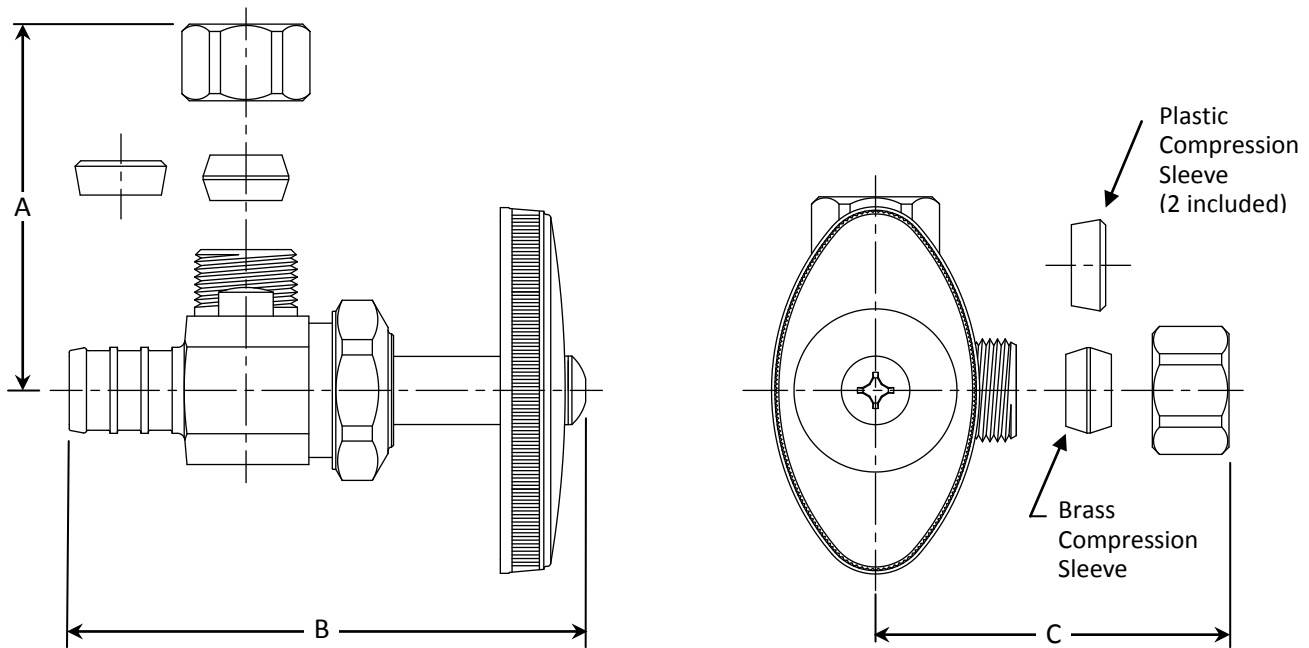

PART DIMENSIONS (Inches)			
Model	DIM. A	DIM. B	DIM. C
BRPX1901LR	1.06	2.82	1.06

## Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (File # 0645)
- CSA listed to ASME A112.18.1 / CSA B125.1 (File # 204593)
- No Lead product CSA listed to Low Lead Content Certification Program – Plumbing Products Class 6853-01



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.

**BrassCraft**