

Code Number

3012426

► Flush Cycle 1.5 gpf / 5.7 lpf


Specifications

Quiet, Exposed, Diaphragm Type, Chrome Plated Urinal Flushometer with the following features:

- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed • **Bypass**
- ADA Compliant Metal Oscillating Non-Hold-Open Handle with • Triple Seal Handle Packing
- 1" I.P.S. Screwdriver Bak-Chek® Stop with free spinning vandal • resistant stop cap
- Sweat Solder Adapter with Cover Tube & Cast Wall Flange with . Set Screw
- Non-Hold-Open Handle, Fixed Metering Bypass and No External • Volume Adjustment to Ensure Water Conservation
- Flush Accuracy Controlled by CID Technology .
- Diaphragm, Handle Packing and Vacuum Breaker to be molded • from PERMEX® Rubber Compound for Chloramine Resistance

Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

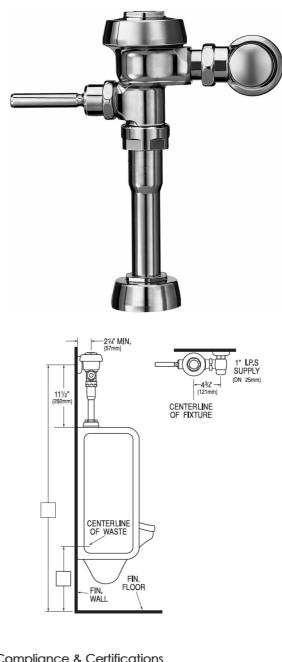

Compliance & Certifications



This space for Architect/Engineer Approval