
The Twinning Kit is designed to allow a single thermostat to control two identical HVAC units. It can also be expanded to control a total of four HVAC units. The iO-TWIN can be used on common or separate ducted systems with single-stage, multi-stage or heat pump equipment. Only standard 18-gauge thermostat wire is required. Thermostats and HVAC units can be located up to 300' from the twinning kit panel.

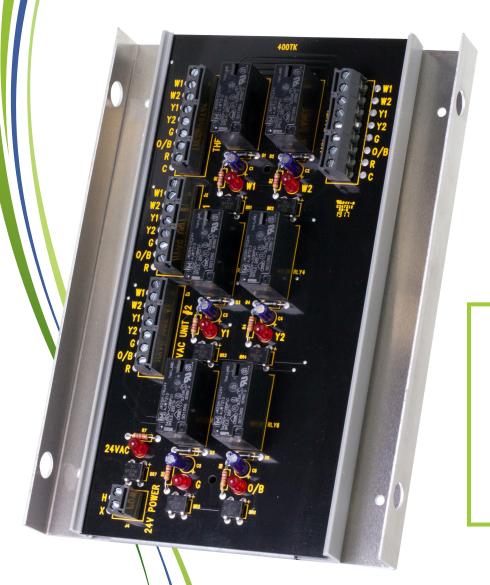

## **Features and Benefits:**


- · Easy to install and setup
- Uses standard 18-gauge thermostat wire
- · Optional control of up to four units
- Reduces installation time and cost
- Can be used with the Lead/Lag Controller

Warranty: 5 years

## **Specifications:**

Mounting	Aluminum back plate with mounting holes
Dimensions	8.00" Height x 6.00" Width x 1.50" Depth
Input Voltage	24VAC

## **BOARD DIAGRAM**

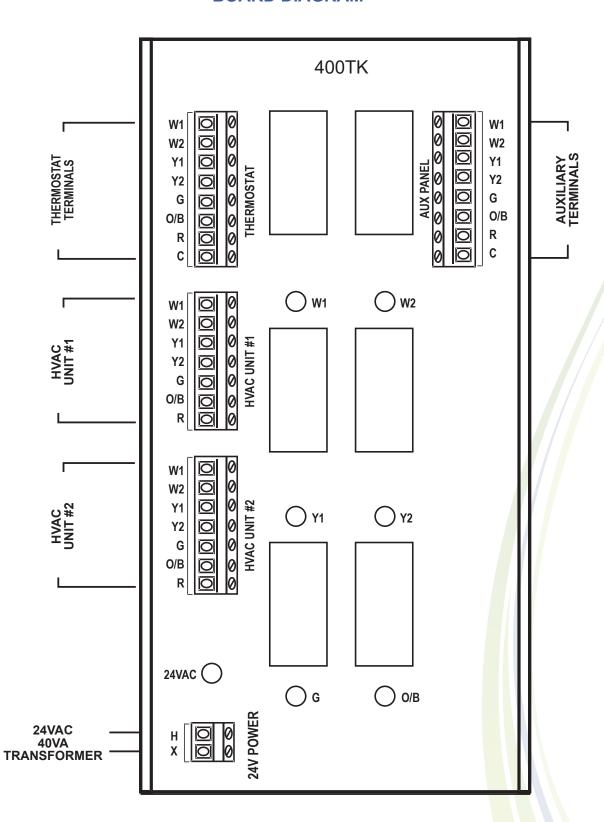



5351 East Thompson Road Suite 142 Indianapolis, IN 46237 P: 888.359.0362 F:317.489.5204 info@iOhvaccontrols.com www.iOhvaccontrols.com