





2016/2017





TOTO EVERYWHERE

INNOVATION & TECHNOLOGY HIGHLIGHTS3-5

ECOPOWER® FAUCETS

INNOVATION & TECHNOLOGY HIGHLIGHTS	
COMPATIBILITY CHART	
AXIOM [®]	
GOOSENECK	
GOOSENECK WALL-MOUNT	
HELIX [®] 9	
HELIX M	
HELIX WALL-HUNG10	
INTEGRATED FAUCET10	
LIBELLA™10	
LIBELLA M11	
LIBELLA WALL-MOUNT	
LIBELLA WALL-MOUNT M11	
STANDARD FAUCET11	

TOILETS & URINALS

INNOVATION & TECHNOLOGY HIGHLIGHTS	13
TOILETS COMPATIBILITY CHART	14
1G® TOILETS	15-16
1.28 GPF TOILETS	
DRAKE [®]	17-18
ENTRADA™	19
FLUSHOMETER HET	
FLUSHOMETER WALL-HUNG HET	
TOILET SEATS	
ECOPOWER HET FLUSH VALVE 1.28	22-23
ECOPOWER TOILET FLUSH VALVE 1.6	22-23
MANUAL TOILET FLUSH VALVE	
URINALS COMPATIBILITY CHART	
WASHOUT ULTRA HEU	
WASHOUT HEU	
ECOPOWER ULTRA HEU FLUSH VALVE 0.12	5 27
ECOPOWER HEU FLUSH VALVE 0.5	
ECOPOWER URINAL FLUSH VALVE 1.0	
MANUAL URINAL FLUSH VALVE	

LAVATORIES

INNOVATION & TECHNOLOGY HIGHLIGHTS	29
LUMINIST® VESSEL	30
ARVINA® VESSEL	
SELF-RIMMING	32
ATHERTON™	
UNDERCOUNTER	.34-35
WALL-HUNG	

SOAP DISPENSERS

INNOVATION & TECHNOLOGY HIGHLIGHTS.	37
SENSOR OPERATED SOAP DISPENSERS	
SOAP	

CLEAN DRY[®] HAND DRYERS

NNOVATION & TECHNOLOGY HIGHLIGHTS	41
LEAN DRY HAND DRYERS	42
COLORS & FINISHES	43

TOTO EVERYWHERE



TOTO products can create beautiful, refreshing bathroom experiences in any situation. We design everything from urinals to hand dryers, so even a football stadium or an airport restroom can be a peaceful, inspiring escape.

We're known for consistent highperformance design and a beautiful, global aesthetic in all our products, so wherever you find TOTO you can experience the same reliability, value and style.



In today's fast-paced world, the need for superior performance and reliability means everything. And when it comes to busy commercial buildings, TOTO products are the only choice. We design world-class, eco-friendly plumbing products that help you save water and money without sacrificing an ounce of performance.

LEADERSHIP & VISION

MAKING OUR PLANET A BETTER PLACE, DROP BY DROP.





Water is life's most precious element, and at TOTO, we innovate products to help conserve it. All of our high-efficiency showers, ultra high-efficiency toilets, urinals and commercial faucets meet the California Code of Water Regulations.

COMPLIANCE

CERTIFICATION & TOTO offers a full range of bathroom products that can help professionals in the commercial industry earn LEED points toward certification.

> LEED is an internationally recognized green building certification system that provides third-party verification for a building or community. To get maximum LEED points, a new or existing building must reach specified waterusage reduction percentages. The more usage reductions, the more LEED points are earned.



THE AMERICANS WITH DISABILITIES ACT (ADA)

The Americans with Disabilities Act (ADA) was enacted in 1990 to establish design codes to serve people of all ages and abilities. A core principle behind TOTO Total Design, ADA standards consider the needs of everyone without additional adaptation or specialization, optimizing the bathroom experience for all generations in the family home.

By innovating ergonomics and accessibility, and combining them with our global design aesthetic, we give everyone everything that's great about TOTO.

ENVIRONMENTAL RESPONSIBILITY

TOTO plays a significant role in leading the sustainability charge in our industry. In fact, our active role in leading policy and certification organizations demonstrates how we go beyond products or practices to help ensure environmental responsibility across all company activities.

- > TOTO is the only plumbing manufacturer to receive the EPA's Water Efficiency Leader Award
- TOTO was the first plumbing products manufacturer to have employees become substainability experts by gaining LEED Accredited Professional status
- > TOTO was the first major plumbing products manufacturer to join the United States Green Building Council (USGBC)
- TOTO was the first plumbing products manufacturer to develop third-party verified LCA Transparency Reports for bath products.





United States Green Building Council



Water Efficiency Leader Award



Environmental Protection Agency



I FFD AP



ARGON

Argon

Award




Meets California Water Savings Regulations



COMMERCIAL ECOPOWER® FAUCETS

Innovation & Technology Highlights

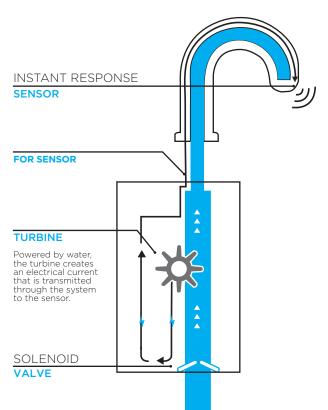





EcoPower sensor faucets harness the energy of running water to power themselves. It's a simple solution that saves water and energy. That's the TOTO theory of sustainability.

The water-powered turbine in the EcoPower faucet creates an electrical current that is stored in rechargeable cells to power the Smart Sensor System. EcoPower replenishes its charge with every use and has no minimum daily usage requirement. This translates into reduced electricity use, lower maintenance costs and better ecology with hands-free, automatic-shut-off functionality.

ECOPOWER ADVANTAGE

- Sustainably engineered to require no external electricity source
- Hydropower system needs no routine battery replacement which lowers maintenance costs
- Strategically placed sensor ensures instantaneous water response, minimizing water wastage
- Hands-free operation reduces the chance of spreading contaminants

TOTO COMMERCIAL PERFORMANCE

A WIN-WIN. Unlike other sensor faucets, EcoPower faucets use hydropower to operate the sensor. The flow of water, which meets the most rigorous water saving standards, spins the high-efficiency turbine to both create and store power for operation. TOTO's proprietary sensor technology has been perfected over the past 15 years.

ECOPOWER® F			KIT	(INCLUDES SPO	UT & CONTROLI	_ER)						
CHART		0.9 GPC, (10	SEC-ON DEMAN	D) @ 0.5 GPM	0.19 GPC, (20	SEC-CONTINUO	JS) @ 0.5 GPM					
PRODUCT	SKU#	SINGLE SUPPLY	HOT/COLD MIXING VALVE	THERMOSTATIC MIXING VALVE	SINGLE SUPPLY	HOT/COLD MIXING VALVE	THERMOSTATIC MIXING VALVE					
Axiom®	TEL145	TEL145-D10E#CP	TEL145-D10EM#CP	TEL145-D10ET#CP	TEL145-C20E#CP	TEL145-C20EM#CP	TEL145-D20ET#CP					
Gooseneck®	TEL155	TEL155-D10E#CP	TEL155-D10EM#CP	TEL155-D10ET#CP	TEL155-C20E#CP	TEL155-C20EM#CP	TEL155-D20ET#CP					
Gooseneck Wall-Mount	TEL165	TEL165-D10E#CP	TEL165-D10EM#CP	TEL165-D10ET#CP	TEL165-C20E#CP	TEL165-C20EM#CP	TEL165-D20ET#CP					
Helix®	TEL115	TEL115-D10E#CP	TEL115-D10EM#CP	TEL115-D10ET#CP	TEL115-C20E#CP	TEL115-C20EM#CP	TEL115-D20ET#CP					
Helix M	TEL125	TEL125-D10E#CP	TEL125-D10EM#CP	TEL125-D10ET#CP	TEL125-C20E#CP	TEL125-C20EM#CP	TEL125-D20ET#CP					
Helix Wall-Mount	TEL135	TEL135-D10E#CP	TEL135-D10EM#CP	TEL135-D10ET#CP	TEL135-C20E#CP	TEL135-C20EM#CP	TEL135-D20ET#CP					
Libella™	TEL1A5	TEL1A5-D10E#CP	TEL1A5-D10EM#CP	TEL1A5-D10ET#CP	TEL1A5-C20E#CP	TEL1A5-C20EM#CP	TEL1A5-D20ET#CP					
Libella M	TEL1B5	TEL1B5-D10E#CP	TEL1B5-D10EM#CP	TEL1B5-D10ET#CP	TEL1B5-C20E#CP	TEL1B5-C20EM#CP	TEL1B5-D20ET#CP					
Libella Wall-Mount	TEL1C5	TEL1C5-D10E#CP	TEL1C5-D10EM#CP	TEL1C5-D10ET#CP	TEL1C5-C20E#CP	TEL1C5-C20EM#CP	TEL1C5-D20ET#CP					
Libella Wall-Mount M	TEL1D5	TEL1D5-D10E#CP	TEL1D5-D10EM#CP	TEL1D5-D10ET#CP	TEL1D5-C20E#CP	TEL1D5-C20EM#CP	TEL1D5-D20ET#CP					
Standard	TEL105*	TEL105-D10E#CP	TEL105-D10EM#CP	TEL105-D10ET#CP	TEL105-C20E#CP	TEL105-C20EM#CP	TEL105-D20ET#CP					
Integrated	TEL5LI15R		Controller integrated into the spout above the deck, 0.15 GPC (15 Sec. On Demand)									

* Standard spout available in: Polished Chrome #CP, Brushed Nickel #BN, Polished Nickel #PN

GPC (Gallons Per Cycle) | GPM (Gallons Per Minute)

ECOPOWER® F		KIT (INCLUE	DES SPOUT & CC	NTROLLER)	AVAILAB	LE VALVES
CHARI		0.18 GPC, (10	SEC-ON DEMAN	D) @ 1.0 GPM		
PRODUCT	SKU#	SINGLE SUPPLY	HOT/COLD MIXING VALVE	THERMOSTATIC MIXING VALVE	HOT/COLD MIXING VALVE	THERMOSTATIC MIXING VALVE
Axiom [®]	TEL141	TEL141-D10E#CP	TEL141-D10EM#CP	TEL141-D10ET#CP		
Gooseneck®	TEL151	TEL151-D10E#CP	TEL151-D10EM#CP	TEL151-D10ET#CP		
Gooseneck Wall-Mount	TEL161	TEL161-D10E#CP	TEL161-D10EM#CP	TEL161-D10ET#CP		
Helix®	TEL111	TEL111-D10E#CP	TEL111-D10EM#CP	TEL111-D10ET#CP		
Helix M	TEL121	TEL121-D10E#CP	TEL121-D10EM#CP	TEL121-D10ET#CP		
Helix Wall-Mount	TEL131	TEL131-D10E#CP	TEL131-D10EM#CP	TEL131-D10ET#CP	TLM10	TLT10R
Libella™	TEL1A1	TEL1A1-D10E#CP	TEL1A1-D10EM#CP	TEL1A1-D10ET#CP		
Libella M	TEL1B1	TEL1B1-D10E#CP	TEL1B1-D10EM#CP	TEL1B1-D10ET#CP		
Libella Wall-Mount	TEL1C1	TEL1C1-D10E#CP	TEL1C1-D10EM#CP	TEL1C1-D10ET#CP		
Libella Wall-Mount M	TEL1D1	TEL1D1-D10E#CP	TEL1D1-D10EM#CP	TEL1D1-D10ET#CP		
Standard	TEL101*	TEL101-D10E#CP	TEL101-D10EM#CP	TEL101-D10ET#CP		

* Standard spout available in: Polished Chrome #CP, Brushed Nickel #BN, Polished Nickel #PN

GPC (Gallons Per Cycle) | GPM (Gallons Per Minute)

ECOPOWER® FAUCETS OVERVIEW

AXIOM[®]

ECOPOWER FAUCET TEL145-D10E (0.5 GPM/0.09 GPC) TEL145-C20E (0.5 GPM/0.19 GPC)

TEL145-C20E (0.5 GPM/0.19 GPC) TEL141-D10E (1.0 GPM/0.18 GPC)



GOOSENECK ECOPOWER FAUCET

TEL155-D10E (0.5 GPM/0.09 GPC) TEL155-C20E (0.5 GPM/0.19 GPC) TEL151-D10E (1.0 GPM/0.18 GPC)



GOOSENECK WALL-MOUNT

ECOPOWER FAUCET TEL165-D10E (0.5 GPM/0.09 GPC) TEL165-C20E (0.5 GPM/0.19 GPC) TEL161-D10E (1.0 GPM/0.18 GPC)




HELIX®


ECOPOWER FAUCET TEL115-D10E (0.5 GPM/0.09 GPC) TEL115-C20E (0.5 GPM/0.19 GPC) TEL111-D10E (1.0 GPM/0.18 GPC)






- Self-generating hydropower EcoPower system
- No minimum daily usage requirement
- Micro-sensor positioned underneath the spout head for accurate hand detection ensuring smooth and consistent water distribution
- Vandal resistant aerator housing
- Durable chrome plated spout body
- Single-hole mount
- Kit includes spout body, controller box, and mounting hardware - less supply lines
- Equipped with 0.5 GPM or 1.0 GPM flow control






- No minimum daily usage requirement
- Micro-sensor positioned underneath the spout head for accurate hand detection ensuring smooth and consistent water distribution
- Vandal resistant aerator housing
- Durable chrome plated spout body
- Single-hole mount
- Kit includes spout body, controller box, and mounting hardware - less supply lines
- Equipped with 0.5 GPM or 1.0 GPM flow control






- Self-generating hydropower EcoPower system
- No minimum daily usage requirement
- Micro-sensor positioned underneath the spout head for accurate hand detection ensuring smooth and consistent water distribution
- Vandal resistant aerator housing
- Durable chrome plated spout body
- Single-hole mount
- Kit includes spout body, controller box, and mounting hardware - less supply lines
- Equipped with 0.5 GPM or 1.0 GPM flow control



- Self-generating hydropower EcoPower system
- No minimum daily usage requirement
- Micro-sensor positioned underneath the spout head for accurate hand detection ensuring smooth and consistent water distribution
- Vandal resistant aerator housing
- Durable chrome plated spout body
- Single-hole mount
- Kit includes spout body, controller box, and mounting hardware - less supply lines
- Equipped with 0.5 GPM or 1.0 GPM flow control







ECOPOWER[®] FAUCETS OVERVIEW

HELIX M

ECOPOWER FAUCET TEL125-D10E (0.5 GPM/0.09 GPC) TEL125-C20E (0.5 GPM/0.19 GPC) TEL121-D10E (1.0 GPM/0.18 GPC)







INTEGRATED ECOPOWER FAUCET TEL5LI15R (0.5 GPM/0.15 GPC)




LIBELLA™ ECOPOWER FAUCET TEL1A5-DIOE (0.5 GPM/0.09 GPC) TEL1A5-C20E (0.5 GPM/0.19 GPC) TEL1A1-DI0E (1.0 GPM/0.18 GPC)



NEW



- Self-generating hydropower EcoPower system
- No minimum daily usage requirement
- Micro-sensor positioned underneath the spout head for accurate hand detection ensuring smooth and consistent water distribution
- Vandal resistant aerator housing
- Durable chrome plated spout body
- Single-hole mount
- Kit includes spout body, controller box, and mounting hardware - less supply lines
- Equipped with 0.5 GPM or 1.0 GPM flow control







- Self-generating hydropower
 EcoPower system
- No minimum daily usage requirement
- Micro-sensor positioned underneath the spout head for accurate hand detection ensuring smooth and consistent water distribution
- Vandal resistant aerator housing
- Durable chrome plated spout body
- Single-hole mount
- Kit includes spout body, controller box, and mounting hardware - less supply lines
- Equipped with 0.5 GPM or 1.0 GPM flow control
 - 7-11/16" (194mm) (60mm) 7-5/16" (186mm)





- Hydropower self-generating system
- Micro-sensor positioned underneath the spout head for accurate hand detection
- Adjustable temperature control
- Controller integrated into the faucet above the deck for easy installation
- Thermostatic mixer with SMA technology for superior scald protection

6-1/8

(155mm)

2-3/16' (56mm) 5-15/16" (151mm)


Single-hole mount

5-1/16" (129mm)

 Equipped with 0.5 GPM flow control



- Hydropower self-generating system
- Consists of spout and controller
- No minimum daily usage requirement
- Micro-sensor positioned underneath the spout head for accurate hand detection ensuring smooth and consistent water distribution
- Vandal resistant aerator housing
- Sensor faucet with aerated flow
- Self adjusting faucet with controller box and mounting hardware, less supply lines
- Single-hole mount
- Equipped with 0.5 GPM or 1.0 GPM flow control







LIBELLA M **ECOPOWER FAUCET**

TEL185-D10E (0.5 GPM/0.09 GPC) TEL185-C20E (0.5 GPM/0.19 GPC) TEL 1B1-D10E (1.0 GPM/0.18 GPC)



LIBELLA WALL-MOUNT ECOPOWER FAUCET TEL1C5-D10E (0.5 GPM/0.09 GPC) TEL1C5-C20E (0.5 GPM/0.19 GPC) TEL 1C1-D10E (1.0 GPM/0.18 GPC)



LIBELLA WALL-MOUNT M ECOPOWER FAUCET TEL1D5-D10E (0.5 GPM/0.09 GPC) TEL1D5-C20E (0.5 GPM/0.19 GPC)

TEL 1D1-D10E (1.0 GPM/0.18 GPC)



NFN

STANDARD


ECOPOWER FAUCET TEL105-D10E (0.5 GPM/0.09 GPC) TEL105-C20E (0.5 GPM/0.19 GPC) TEL101-D10E (1.0 GPM/0.18 GPC)








- Hydropower self-generating system
- Consists of spout b and controller
- No minimum daily usage requirement
- Micro-sensor positioned underneath the spout head for accurate hand detection ensuring smooth and consistent water distribution
- Vandal resistant ▶ aerator housing
- Sensor faucet with aerated flow b
- ⊾ Self adjusting faucet with controller box and mounting hardware, less supply lines
- Single-hole mount ▶
- Equipped with 0.5 GPM or 1.0 GPM flow control
- Available in Polished Chrome (#CP) only




- Hydropower self-generating ⊾ system
- Consists of spout Ъ and controller No minimum daily
- usage requirement
- Micro-sensor positioned ► underneath the spout head for accurate hand detection ensuring smooth and consistent water distribution
- Vandal resistant aerator housing
- Sensor faucet with • aerated flow
- Self adjusting faucet with ▶ controller box and mounting hardware, less supply lines
- Single-hole mount
- ⊾ Equipped with 0.5 GPM or 1.0 GPM flow control
- Available in Polished Chrome (#CP) only





- Hydropower self-generating system
- Consists of spout Ъ and controller
- No minimum daily usage requirement
- Micro-sensor positioned ► underneath the spout head for accurate hand detection ensuring smooth and consistent water distribution
- Vandal resistant aerator housing
- Sensor faucet with aerated flow
- ► Self adjusting faucet with controller box and mounting hardware, less supply lines
- Single-hole mount
- Equipped with 0.5 GPM or 1.0 GPM flow control
- Available in Polished Chrome (#CP) only





AVAILABLE


FINISHES







- Hydropower self-generating system
- Consists of spout and controller
- No minimum daily usage requirement
- Micro-sensor positioned ⊾ underneath the spout head for accurate hand detection ensuring smooth and consistent water distribution
- Vandal resistant aerator housing
- Durable chrome plated ▶ spout body
- Single-hole mount
- Kit includes spout body, controller box, and mounting hardware - less supply lines
- Equipped with 0.5 GPM or 1.0 GPM flow control
- Available in Polished Chrome (#CP), Polished Nickel (#PN), and Brushed Nickel (#BN) only









1G[®] TOILETS

35% water savings

Reduces water use by 35% or

more on average over a standard 1.6 GPF toilet

PER YEAR

TOTO's 1G toilets are a perfect solution to help owners and managers of hospitality and multi-family housing properties address their water conservation challenges. The powerful, yet quiet 1G system offers a 35 percent savings over 1.6 GPF toilets —a substantial savings without wavering on our renowned performance.



*The average American flushes five times a day at home. Assuming an average household of 3.2 people over 365 days @ 3¢ per gallon.

COMMERCIAL TOILETS, URINALS & FLUSH VALVES

Innovation & Technology Highlights

THE TOTO **ADVANTAGE**

- Thorough and extensive testing to ensure balanced flushing
- ▶ HETs use 1.28 GPF
- HEUs use as little as 0.125 GPF
- > TOTO toilet and urinal fixtures are designed for efficient operation, ensuring the highest performance with the lowest consumption levels.







EFVs use the flow of the water to power the entire system.

and when paired with a TOTO high-efficiency commercial toilet or urinal.

equals a balanced system that cannot be matched by combining different toilets and flush valves.



CEFIONTECT[™]

- Extraordinarily smooth glaze prevents particulates from adhering to ceramic surfaces
- The ion-barrier in CeFiONtect keeps surfaces cleaner, longer
- Less cleaning means less water use and fewer chemicals in the environment






No CeFiONtect

With CeFiONtect



- Hydroelectric turbine uses water to create power
- EcoPower flush valves provide maximum performance in high-traffic commercial spaces
- Self-powering eliminates costs of installing electrical supplies and wiring
- No routine battery replacement means less maintenance costs



TOILETS **COMPARISON CHART**

							E	BOWL SEAT F		RECOM.	GPF								0.71.15.044	
	KIT	BOWL	TANK	ROUGH- IN	ELON.	ROUN.	SD	HEIGHT	SEAT SYSTEM		1G 1.28 1.6 (3.8L) (4.8L) (6L		1.6 (6L)	DUAL	8	O	¢.	9	OTHER**	•
CARLYLE II 1G	MS614114CUFG	N/A	N/A	12" (10"-14")	•		•	UNIVERSAL	SS114 included	10 😂	•				•	•	•	•		•
ULTRAMAX II 1G	MS604114CUFG	N/A	N/A	12"	•			UNIVERSAL	SS114 included	16 😂	•				•	•	•	•		•
VESPIN II 1G	CST474CUF(G)	CT474CUF(G)	ST453U	12" (10"-14")	•		•	UNIVERSAL	SS114	10 🗑	•				•*	•	•	•	R	•
	CST454CUF(G)	C454CUF(G)	ST453U	12"	•			UNIVERSAL	SS114	16 🗟	•				•*	•	•	٠	R	•
DRAKE II 1G	CST453CUF(G)	C453CUF(G)	ST453U	12"		•		UNIVERSAL	SS113	16 🗑	•				•*	•	•	٠	R	\square
DRAKE	CST454CEF(G)	C454CUF(G)	ST454E	12"	•			UNIVERSAL	SS114	8		٠			•*	•	•	٠	R	•
DRAKE II	CST453CEF(G)	C453CUF(G)	ST454E	12"		•		UNIVERSAL	SS113	900		•			•*	•	•	٠	R	\square
	CST744EL	C744EL	ST743E	12"	•			ADA	SS114	Đ		٠				•	•	٠	R, B, D, DB, RB	\square
	CST744SL	C744EL	ST743S	12"	•			ADA	SS114	G+			•			•	•		R, B, D, DB, RB	\square
	CST744ELN	C744EL	ST744E	12"	•			ADA	SS114	Đ		•				•	•	•	R	\square
	CST744EG	C744EG	ST743E	12″	•			REGULAR	SS114	E•		•			•			٠	R, B, D, DB, RB	\square
	CST744E	C744E	ST743E	12"	•			REGULAR	SS114	Đ		•						•	R, B, D, DB, RB	\square
	CST744SG	C744EG	ST743S	12"	•			REGULAR	SS114	G+			•		•				R, B, D, DB, RB	
	CST744S	C744E	ST743S	12"	•			REGULAR	SS114	G			•						R, B, D, DB, RB	
ECO DRAKE	CST744EGN	C744EG	ST744E	12"	•			REGULAR	SS114	Đ		٠			•			•	R	
	CST744EN	C744E	ST744E	12"	•			REGULAR	SS114	Ē		٠						•	R	
	CST744EF.10	C744EF.10	ST743E	10″	•			UNIVERSAL	SS114	Ē		٠				•	•	•	R, B, D, DB, RB	
	CST744SF.10	C744EF.10	ST743S	10"	•			UNIVERSAL	SS114	Ġ			•			•	•		R, B, D, DB, RB	
	CST744EFN.10	C744EF.10	ST744E	10″	•			UNIVERSAL	SS114	Ē		٠				•	•	•	R	
	CST743E	C743E	ST743E	12″		•		REGULAR	SS113	Đ		٠						•	R, B, D, DB, RB	
	CST743S	C743E	ST743S	12"		•		REGULAR	SS113	G+			•						R, B, D, DB, RB	
	CST743EN	C743E	ST744E	12″		•		REGULAR	SS113	Đ		•						٠	R	
ENTRADA	CST244EF	C244EF	ST243E	12″	•			UNIVERSAL	SS114	Đ		٠				•	•	•	R	
ENTRADA	CST243EF	C243EF	ST243E	12″		•		UNIVERSAL	SS113	Đ		٠				•		•	R	

#51: Less CeFiONtect **R: Right Hand Trip Lever available **B: Bolt Down Lid available **D: Insulated Tank available **DB: Insulated Tank and Bolt Down Lid available **RB: Right Hand Trip Lever and Bolt Down Lid available

	USH VALVE PATIBILI	ſY			FLUSHOMETER						
CHAR	RT			ECOPC	DWER®	MANUAL					
	PRODUCT	SKU#		1.28 GPF	1.6 GPF	1.28 GPF	1.6 GPF				
			Exposed	TET1LA32#CP	TET1GA32#CP						
	Floor Mounted	CT705EN(G)	Exposed	TET6LA32#CP	TET6GA32#CP	TMT1LN32#CP	TMT1NNC-32				
	Top Spud	op Spud	Concealed	TET2LA32#SS	TET2GA32#SS	IMITEIN52#CP	TMTTININC-52				
				TET3LA32#SS	TET3GA32#SS						
			Concealed	TET1LA32#CP	TET1GA32#CP						
	Floor Mounted	CT705ELN(G)		TET6LA32#CP	TET6GA32#CP	TMT1LN32#CP	TMT1NNC-32				
TOILET	Top Spud	CT/OSELIN(G)		TET2LA32#SS	TET2GA32#SS	TMITILIN32#CP	TMTTININC-32				
			Concealed	TET3LA32#SS	TET3GA32#SS						
			Exposed	TET1LA32#CP	TET1GA32#CP						
	Wall-Mounted	CT708E(G)	Exposed	TET6LA32#CP	TET6GA32#CP	TMT1LN32#CP	TMT1NNC-32				
	Top Spud	C1708E(0)	Concealed	TET2LA32#SS	TET2GA32#SS	THTENS2#CF	THTTININC-52				
			Concealed	TET3LA32#SS	TET3GA32#SS						
	Wall-Mounted	CT708EV(G)	Concealed	TET2LA31#SS	TET2GN31#SS						
	Back Spud	C1708EV(0)	Concealed	TET3LA31#SS	TET3GA31#SS						

- --- ---. . .



CARLYLE® II 1G **ONE-PIECE TOILET** 1.0 GPF MS614114CUFG 16 8 8 6



ULTRAMAX® II 1G® **ONE-PIECE TOILET** 1.0 GPF MS604114CUFG




VESPIN® II 1G TWO-PIECE TOILET 1.0 GPF CST474CUF(R)(G)




1



- ▶ Tornado Flush™, ultra highefficiency (1.0 GPF/3.8 LPF)
- ▶ CeFiONtect[™] ceramic glaze
- ADA Compliant
- Universal Height
- Decorative one-piece toilet with high profile design
- Elongated front bowl with SoftClose[®] seat (SS114)
- Standard 12" rough-in, less supply
- > Optional 10" and 14" rough-in available
- Chrome trip lever
- Meets water efficiency and performance standards Available in #01 Cotton only
- Skirted design
- Connect+™ models available ►









- > Tornado Flush, ultra highefficiency (1.0 GPF/3.8 LPF)
- CeFiONtect ceramic glaze
- ADA Compliant
- Universal Height
- Decorative one-piece toilet with high profile design
- Elongated front bowl with SoftClose seat (SS114)
- Standard 12" rough-in, less supply
- Chrome trip lever
- Meets water efficiency
- and performance standards
- Connect+ models available




- CeFiONtect ceramic glaze
- ADA Compliant
- Universal Height
- Decorative two-piece design with high-profile tank
- Elongated front bowl and tank set, less seat
- Standard 12" rough-in, less supply
- > Optional 10" and 14" rough-in available






AVAILABLE

COLORS





#01

Cotton

Sedona Beige

#12




#11



#51 Fbony

Available in #01 Cotton only Connect+ models available ▶



1.0 GPF TOILETS OVERVIEW

DRAKE® II 1G TWO-PIECE TOILET 1.0 GPF CST454CUF(R)(G)






- Tornado Flush, ultra highefficiency (1.0 GPF/3.8 LPF)
- CeFiONtect ceramic glaze
- ADA Compliant
- Universal Height
- Decorative two-piece design with high-profile tank
- Elongated front bowl and tank set, less seat
- Standard 12" rough-in, less supply
- Chrome trip lever
- Meets water efficiency and performance standards
- Connect+ models available





CAL Green




- Tornado Flush™, ultra highefficiency (1.0 GPF/3.8 LPF)
- ▶ CeFiONtect[™] ceramic glaze
- ADA Compliant
- Universal Height
- Decorative two-piece design with high-profile tank
- Round front bowl and tank set, less seat
- Standard 12" rough-in,
- less supplyChrome trip lever
- Meets water efficiency
- and performance standards
- Available in #01 Cotton only
- Available in the first half of 2016















1.28 GPF TOILETS OVERVIEW

ECO DRAKE® TWO-PIECE TOILET 1.28 GPF CST744E(R)(G)





🕒 🔕 🕕 🐼 📥 CAL Green

ECO DRAKE - 10" TWO-PIECE TOILET 1.28 GPF CST744EF(R).10



ECO DRAKE - ROUND TWO-PIECE TOILET 1.28 GPF CST743E(R)





- ▶ E-Max[®] flushing system, highefficiency (1.28 GPF/4.8 LPF)
- ▶ Optional CeFiONtect[™] ceramic glaze
- Two-piece toilet with highprofile tank
- Elongated front bowl and tank set. less seat
- Chrome trip lever
- > 12" Rough-in, less supply
- Meets water efficiency and performance standards
- Tank option: bolt down lid. or/ and insulated tank available




- E-Max flushing system, highefficiency (1.28 GPF/4.8 LPF)
- Universal Height ▶
- Two-piece toilet with high-⊾ profile tank
- Elongated front bowl and tank set. less seat
- Chrome trip lever
- > 12" Rough-in, less supply
- ADA compliant
- Meets water efficiency
- and performance standards
- Tank option: bolt down lid. or/ ⊾ and insulated tank available





- E-Max flushing system, highefficiency (1.28 GPF/4.8 LPF)
- Universal Height
- Two-piece toilet with highprofile tank
- Elongated front bowl and tank set. less seat
- ADA compliant
- Chrome trip lever
- > 10" Rough-in, less supply Meets water efficiency
- and performance standards Tank option: bolt down lid. or/ and insulated tank available





- E-Max flushing system
- Two-piece toilet with highprofile tank
- Round front bowl and tank set, less seat
- Chrome trip lever
- > 12" Rough-in, less supply Meets water efficiency
- and performance standards Tank option: bolt down lid, or/ and insulated tank available













#01

AVAILABLE

COLORS





#12 Sedona Cotton Beige





#11



1.28 GPF TOILETS OVERVIEW

ECO DRAKE® TRANSITIONAL TWO-PIECE TOILET 1.28 GPF CST744E(R)(G)N



ECO DRAKE TRANSITIONAL -ADA TWO-PIECE TOILET 1.28 GPF CST744EL(R)N



ECO DRAKE TRANSITIONAL - 10" ECO DRAKE TRANSITIONAL -ROUND TWO-PIECE TOILET TWO-PIECE TOILET 1.28 GPF 1.28 GPF CST744EF(R)N.10



CST743E(R)N 🕒 🐼 🐼 CAL Green



- Transitional Design
- E-Max[®] flushing system, high-
- efficiency (1.28 GPF/4.8 LPF) ▶ Optional CeFiONtect[™]
- ceramic glaze Two-piece toilet with highprofile tank
- Elongated front bowl and tank set, less seat
- Chrome trip lever
- > 12" Rough-in, less supply
- Meets water efficiency and performance standards




- Transitional Design
- E-Max flushing system, highefficiency (1.28 GPF/4.8 LPF)
- Universal Height Two-piece toilet with high-
- profile tank
- Elongated front bowl and tank set. less seat
- Chrome trip lever
- 12" Rough-in, less supply
- ADA compliant
- Meets water efficiency
- and performance standards



- Transitional design
- E-Max flushing system, highefficiency (1.28 GPF/4.8 LPF)
- Universal Height
- > Two-piece toilet with highprofile tank
- Elongated front bowl and tank set, less seat
- ADA compliant
- > Chrome trip lever
- ▶ 10" Rough-in, less supply
- Meets water efficiency and performance standards



- Transitional design
- E-Max flushing system
- Two-piece toilet with highprofile tank
- Round front bowl and tank set, less seat
- Chrome trip lever
- 12" Rough-in, less supply
- Meets water efficiency and performance standards

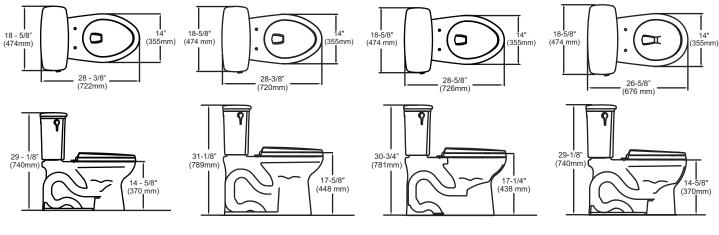

#51

Fbony

#11

Colonial White

#03

Rone



COLORS





1.28 GPF TOILETS OVERVIEW

ENTRADA™ TWO-PIECE TOILET 1.28 GPF CST244EF(R) (Elongated)










- E-Max[®] flushing system, highefficiency (1.28 GPF/4.8 LPF)
- Elongated bowl
- Universal Height
- ADA compliant
- Close coupled, elongated front bowl and tank set, less toilet seat
- Chrome trip lever
- Optional right-hand trip lever(R)
- ▶ 12" Rough-in
- Available in #01 Cotton only



- E-Max flushing system, highefficiency (1.28 GPF/4.8 LPF)
- Rounded bowl
- Universal Height
- Close coupled, round front bowl and tank set,
- less toilet seat
- Chrome trip leverOptional right-hand
- Optional right-h
- trip lever(R) 12" Rough-in
- Available in #01 Cotton only

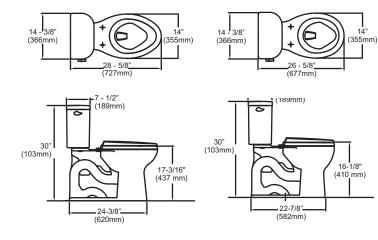



COMMERCIAL TOILETS OVERVIEW

COMMERCIAL FLUSHOMETER HIGH-EFFICIENCY TOILET 1.28 GPF CT705EN(G)







COMMERCIAL FLUSHOMETER HIGH-EFFICIENCY WALL-HUNG TOILET 1.28 GPF CT708E(G)



COMMERCIAL FLUSHOMETER HIGH-EFFICIENCY WALL-HUNG TOILET 1.28 GPF CT708EV(G) CT708EV(G)



- Floor-mounted
- Elongated front bowl, less seat
- > Optional CeFiONtect[™] ceramic glaze (G) - CeFiONtect prevents debris, mold and bacteria from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning
- 1-1/2" Inlet top spud
- ▶ 10"-12" rough-in

12" rough-in dimensions

- For compatible flush valves, see page 14
- Available in cotton #01 only




- Floor-mounted
- ADA compliant
- Elongated front bowl, less seat
- Optional CeFiONtect ceramic glaze(G) - CeFiONtect prevents debris, mold and bacteria from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning
- 1-1/2" Inlet top spud
- 10"-12" rough-in
- For compatible flush valves, see page 14
- Available in cotton #01 only




- ▶ Wall-mounted
- ADA compliant
- Elongated front bowl, less seat
- Optional CeFiONtect ceramic glaze (G) - CeFiONtect prevents debris, mold and bacteria from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning
- > 1-1/2" Inlet top spud
- For compatible flush valves, see page 14




- Wall-mounted
 - ADA compliant
 - Elongated front bowl, less seat
- Optional CeFiONtect ceramic glaze (G) - CeFiONtect prevents debris, mold and bacteria from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning
- ▶ 1-1/2" Back spud inlet
- For compatible flush valves, see page 14










12" rough-in dimensions
















TOILET SEATS OVERVIEW


COMMERCIAL SEAT SC534








- Elongated open front toilet seat
- Mounting hardware included
- Open front toilet seat and cover
- Mounting hardware included







TOILET FLUSH VALVES OVERVIEW

ECOPOWER® CONCEALED TOILET FLUSH VALVE TET2LA - 1.28 GPF TET2GA - 1.6 GPF

NEW






NEW


ECOPOWER EXPOSED TOILET FLUSH VALVE TET1LA - 1.28 GPF TET1GA - 1.6 GPF






- Self-powered hydroelectric flush valve system
- No minimum daily usage requirement
- 14" x 12" stainless steel cover plate with solid bronze valve body
- Neutral rough-in and adjustable tail piece connection
- Self-cleaning piston valve with 360° filter screen
- Manual flush override
- Smart sensor with self-adjusting detection range
- 6-second detection time to prevent ghost flushing
- ADA compliant
- Available in Stainless Steel (#SS) only







- Self-powered hydroelectric flush valve system
- No minimum daily usage requirement
- 4" x 4" brushed stainless steel cover plate with solid bronze valve body
- Neutral rough-in and adjustable tail piece connection
- Self-cleaning piston valve with 360° filter screen
- Manual flush override
- Smart sensor with self-adjusting detection range
- 6-second detection time to prevent ghost flushing
- ADA compliant
- Available in Stainless Steel (#SS) only







- No minimum daily usage requirement
- Durable chrome plated body with tamper-proof screws and solid bronze valve body
- Self-cleaning piston valve with 360° filter screen
- Neutral rough-in and adjustable tail piece connection
- > True mechanical flush override
- Smart sensor with self-adjusting detection range
- 6-second detection time to prevent ghost flushing
- ADA compliant
- Available in Polished Chrome (#CP) only



TOILET FLUSH VALVES OVERVIEW

ECOPOWER EXPOSED 24" VACUUM BREAKER TOILET FLUSH VALVE TET6LA - 1.28 GPF TET6GA - 1.6 GPF



MANUAL TOILET FLUSH VALVE TMT1LN32 - 1.28 GPF

TMT1LN32 - 1.28 GPF TMT1NNC-32 - 1.6 GPF





- Self-powered hydroelectric flush valve system
- No minimum daily usage requirement
- Durable chrome plated body with tamper-proof screws and solid bronze valve body
- Self-cleaning piston valve with 360° filter screen
- Neutral rough-in and adjustable tail piece connection
- > True mechanical flush override
- Smart sensor with self-adjusting detection range
- 6-second detection time to prevent ghost flushing
- For toilet with 1-1/2" top spud inlet using 24" vacuum breaker bar
- ADA compliant
- Available in Polished Chrome (#CP) only



- Manual operated, non-hold open, toilet flush valve complete with 1" angle stop and 1-1/2" vacuum breaker set
- Piston valve action with 1.28/1.6 GPF
- Left/right rough-in
- Top spud exposed
- ADA compliant
- Available in Polished Chrome (#CP) only





URINAL FLUSH VALVE COMPATIBILITY CHART

CITAIN													
					EcoPower®	MANUAL							
	PRODUCT	SKU#		0.125 GPF	0.5 GPF	1.0 GPF	0.5 GPF	1.0 GPF					
	Full Size Top Spud	UT445U	Exposed	TEU1UA12#CP									
	Full Size	UT445UV	Concealed	TEU2UA11SS									
	Back Spud	014450 V	Concealed	TEU3UA11#SS									
	Compact Top Spud	UT105U(G)	Exposed	TEU1UA12#CP									
	Compact Back Spud	UT105UV(G)	Concealed	TEU2UA113#SS									
				TEU3UA113#SS									
URINAL	Full Size Top Spud	UT447E	Exposed		TEU1LA12#CP	TEU1GA12#CP	TMU1LN12#CP	TMU1NNC-12					
			Exposed				TMU1LN22#CP	TMU1NNC-22					
	Full Size	UT447EV	Concealed		TEU2LA11#SS								
	Back Spud	0144720	Concealed		TEU3LA11#SS								
	Compact	UT104F	Exposed		TEU1LA12#CP	TEU1GA12#CP	TMU1LN12#CP	TMU1NNC-12					
	Top Spud	OTIO	Exposed				TMU1LN22#CP	TMU1NNC-22					
	Compact	UT104EV	Concealed		TEU2LA11#SS								
	Back Spud	UTI04EV	Concealed		TEU3LA11#SS								

FLUSHOMETER

COMMERCIAL URINALS OVERVIEW

WASHOUT ULTRA HIGH-EFFICIENCY URINAL 0.125 GPF UT445U







WASHOUT ULTRA HIGH-EFFICIENCY URINAL 0.125 GPF UT105U(G)



WASHOUT ULTRA HIGH-EFFICIENCY URINAL 0.125 GPF UT105UV(G)





- Full size urinal with integral trap
- Washout flush action with 3/4" top spud inlet
- 0.125 GPF
- Complete with low profile dome strainer
- For compatible flush valves, see page 27




- Full size urinal with concealed integral trap
- Washout flush action with 3/4" back spud inlet
- 0.125 GPF
- Complete with low profile dome strainer
- For compatible flush valves, see page 27



- Compact urinal with integral trap
- Washout flush action with 3/4" top spud inlet
- Complete with low profile dome strainer
- > Optional CeFiONtect[™] ceramic glaze(G) - CeFiONtect glaze prevents debris and mold from sticking to ceramic surfaces, leading to fewer chemicals
- For compatible flush valves, see page 27





- Compact urinal with concealed integral trap
- Washout flush action with 3/4" back spud inlet
- Complete with low profile dome strainer
- Optional CeFiONtect ceramic glaze(G) - CeFiONtect glaze prevents debris and mold from sticking to ceramic surfaces, leading to fewer chemicals
- For compatible flush valves, see page 27




#01 Cotton

COLORS






For more information on dimensions please refer to product spec sheet.







COMMERCIAL URINALS OVERVIEW

WASHOUT HIGH-EFFICIENCY URINAL 0.5 GPF UT447E

& CALGreen



URINAL

0.5 GPF

UT447EV

WASHOUT HIGH-EFFICIENCY URINAL 0.5 GPF UT104E

WASHOUT HIGH-EFFICIENCY

WASHOUT HIGH-EFFICIENCY URINAL 0.5 GPF UT104EV

& CALGreen



- > Full size urinal with concealed integral trap
- ▶ Washout flush action with 3/4" top spud inlet
- 0.5 GPF
- For compatible flush valves, see page 27



- > Full size urinal with concealed integral trap
- Washout flush action with 3/4" ▶ back spud inlet
- 0.5 GPF

3/4" (19mm) Spud


 For compatible flush valves, see page 27




- Compact urinal with concealed integral trap
- ▶ Washout flush action with 3/4" top spud inlet, 0.5 GPF
- For compatible flush valves, see page 27



- Compact urinal with concealed integral trap
- Washout flush action with 3/4" back spud inlet, 0.5 GPF
- For compatible flush valves, see page 27







(444mm) **AVAILABLE**


COLORS

#01


Cotton















URINAL FLUSH VALVES OVERVIEW

ECOPOWER CONCEALED URINAL FLUSH VALVE TEU2UA - 0.125 GPF TEU2LA - 0.5 GPF






- Self-powered hydroelectric flush valve system
- No minimum daily usage requirement
- 14" x 12" stainless steel cover plate with solid bronze valve body
- Neutral rough-in and adjustable tail piece connection
- Self-cleaning piston valve with 360° filter screen^t
- Manual flush override
- Smart sensor with self-adjusting detection range
- 6-second detection time to prevent ghost flushing
- ADA compliant
- Available in Stainless Steel (#SS) only



Wall Mount 3/4"



1-1/2" & 1-1/4"

 Self-powered hydroelectric flush valve system


ECOPOWER CONCEALED


URINAL FLUSH VALVE

TEU3UA - 0.125 GPF

TEU3LA - 0.5 GPF

- No minimum daily usage requirement
- 4" x 4" brushed stainless steel cover plate with solid bronze valve body
- Neutral rough-in and adjustable tail piece connection
- Self-cleaning piston valve with 360° filter screen[†]
- Manual flush override
- Smart sensor with self-adjusting detection range
- 6-second detection time to prevent ghost flushing
- ADA compliant
- Available in Stainless Steel (#SS) only






For more information on dimensions please refer to product spec sheet.

ECOPOWER EXPOSED URINAL FLUSH VALVE TEU1UA - 0.125 GPF TEU1LA - 0.5 GPF TEU1GA - 1.0 GPF





- Self-powered hydroelectric flush valve system
- No minimum daily usage requirement
- Durable chrome plated body with tamper-proof screws and solid bronze valve body
- Self-cleaning piston valve with 360° filter screen^t
- Neutral rough-in and adjustable tail piece connection
- True mechanical flush override
- Smart sensor with self-adjusting detection range and fuzzy logic control[‡] to reduce water usage
- 6-second detection time to prevent ghost flushing
- ADA compliant
- Available in Polished Chrome (#CP) only



FLUSH VALVE TMU1LN12 - 0.5 GPF TMU1NNC-12 - 1.0 GPF



MANUAL URINAL



- Manual operated, non-hold open, urinal flush valve complete with 3/4" angle stop and 3/4" or 1-1/4"vacuum breaker set
- Piston valve action with 0.5/1.0 GPF
- Left/right rough-in
- Top spud exposed
- ADA compliant
- Available in Polished Chrome (#CP) only

AVAILABLE FINISHES



*Only applies to 0.5 GPF & 0.125 GPF urinal flush valves. †Only applies to 0.125 GPF urinal flush valves. ‡ Feature available on specific models.

TOTO





TOTO lavatories deliver the ideal combination of design and functionality. Available in a variety of styles from undercounter to self-rimming, our lavatories offer comfortable use for everyone, regardless of age or physical ability. They're the perfect choice for any commercial space, from hotels to public facilities.





The Americans with Disabilities Act (ADA) was enacted in 1990 to establish design codes to serve people of all ages and abilities. A core principle behind TOTO Total Design, ADA standards consider the needs of everyone, no matter their needs, without additional adaptation or specialization, optimizing the bathroom experience for all generations.

VESSEL LAVATORIES OVERVIEW

LUMINIST® LIGHT ROUND VESSEL LAVATORY LLT152#63-BL

LUMINIST LIGHT ROUND VESSEL LAVATORY LLT152#63-WH

LUMINIST RECTANGLE VESSEL LAVATORY LLT151 LUMINIST ROUND VESSEL LAVATORY LLT150



- ø15-5/8" Dia. x 2-3/8" H
- ▶ Basin ø14" Dia.
- Luminist is a semi-clear epoxy resin that displays exceptional strength and is highly scratch and impact resistant
- LED lighting system
- Without overflow
- Complete with installation template, hardware and chrome drain fitting




- ▶ ø15-5/8" Dia. x 2-3/8" H
- Basin ø14" Dia.
- Luminist is a semi-clear epoxy resin that displays exceptional strength and is highly scratch and impact resistant
- LED lighting system
- Without overflow
- Complete with installation template, hardware and chrome drain fitting





- ▶ 19-11/16" W x 12-5/8" D x 3-9/16" H
- Basin 17-7/8" W x 10-13/16" D
- Luminist is a semi-clear epoxy resin that displays exceptional strength and is highly scratch and impact resistant
- Without overflow
- Complete with installation template, hardware and chrome drain fitting





- ▶ Basin ø14-7/8" Dia.
- Luminist is a semi-clear epoxy resin that displays exceptional strength and is highly scratch and impact resistant
- Without overflow
- Complete with installation template, hardware and chrome drain fitting

























SELF-RIMMING LAVATORIES OVERVIEW

SELF-RIMMING LAVATORY LT401

Ġ.

SELF-RIMMING LAVATORY LT402

Ġ.

▶

⊾



SELF-RIMMING LAVATORY LT502

Ġ.



- ▶ 20-3/8" x 17-3/4"
- Oval Self-rimming Lavatory
- ADA compliant
- Vitreous china
- Complete with installation template and sealing compound
- Concealed front overflow
- Faucet not included
- Available in cotton (#01) only




- 19-1/4" diameter
- Round Self-rimming Lavatory
- ADA compliant
- Vitreous china
- Complete with installation template and sealing compound
- Concealed front overflow
- Faucet not included
- ► Available in cotton (#01) only




- ▶ 20" × 17"
- Oval Self-rimming Lavatory
- ADA compliant
- Vitreous china
- Concealed front overflow
- Complete with installation template and sealing compound
- Faucet not included




- ▶ 19" diameter
- Round Self-rimming Lavatory
- ADA compliant
- Vitreous china
- Concealed front overflow
- Complete with installation template and sealing compound
- Faucet not included





















#12

Sedona

Beige



UNDERCOUNTER LAVATORIES OVERVIEW

Ġ.

ATHERTON™ UNDERCOUNTER LAVATORY LT221 ATHERTON UNDERCOUNTER LAVATORY LT231

ATHERTON UNDERCOUNTER LAVATORY LT233 UNDERCOUNTER LAVATORY LT569

Ġ.







▶ 17"x 13"

Ġ.

- Rectangular Undercounter Lavatory
- ADA compliant
- Vitreous china
- Mounting assembly complete with installation template and mounting screw set
- Front overflow
- Available in cotton (#01) only


- ▶ 17"× 14"
- Oval Undercounter Lavatory
- ADA compliant
- Vitreous china
- Mounting assembly complete with installation template and mounting screw set
- Front overflow
- Available in cotton (#01) only


▶ 19"x 15"


Ġ.

- Oval Undercounter Lavatory
- ADA compliant
- Vitreous china
- Mounting assembly complete with installation template and mounting screw set
- Front overflow
- Available in cotton (#01) only


- ▶ 17" x 14"
- Oval Undercounter Lavatory
- ADA compliant
- Vitreous china
- Concealed front overflow
- Mounting assembly complete with installation template, mounting screw set
























UNDERCOUNTER LAVATORIES OVERVIEW CONTINUED

UNDERCOUNTER LAVATORY LT587

Ġ.

RECTANGLE UNDERCOUNTER LAVATORY LT540G

N (3)

RECTANGLE UNDERCOUNTER LAVATORY LT542G

RECTANGLE UNDERCOUNTER LAVATORY LT191(G)

🗞 🕭



- ▶ 19" × 15"
- Oval Undercounter Lavatory
- ADA compliant
- Vitreous china
- Concealed front overflow
- Mounting assembly complete with installation template, mounting screw set
- Available in cotton (#01), sedona beige (#12) and bone (#03) only



> 21-1/4"x 14-3/8"

Front overflow

►

▶.

CeFiONtect[™] ceramic glaze

Mounting assembly complete with installation template and

Available in cotton (#01) and


sedona beige (#12) only


mounting screw set


- - ▶ 19"x 12-3/8"


N (3)


- CeFiONtect ceramic glaze
- Front overflow
- Mounting assembly complete with installation template and mounting screw set
- Available in cotton (#01) and sedona beige (#12) only
- > 20-1/2" x 12-3/8"
- Rear overflow
- Optional CeFiONtect ceramic glaze
- Vitreous china
- Mounting assembly complete with installation template and mounting screw set
























#11 #03 White Rone



WHEELCHAIR USER'S LAVATORIES **OVERVIEW**

UNDERCOUNTER LAVATORY LT156

Ġ.

WALL-HUNG LAVATORY LT307

Ġ.

UNDERCOUNTER LAVATORY LT308

Ġ.








- ▶ 19-3/4" x 13"
- Rear overflow
- Fired clay
- Mounting assembly complete with installation template and mounting screw set
- Available in cotton (#01) only



- splash
- ADA compliant ▶
- Vitreous china
- Punching for concealed arm carrier
- Wall support concealed arms not supplied by TOTO
- Includes wall hanger
- Soap dispenser hole optional
- > Faucet and soap dispenser not included












- ADA compliant
- Vitreous china
- Punching for concealed arm carrier
- Wall support concealed arms not supplied by TOTO
- No hardware included
- Faucet not included










THE TOTO TOTO's soap dispensers offer automatic, touchless operation for a ADVANTAGE more hygienic and comfortable experience. Designed for high-traffic commercial spaces, our soap dispensers are available in industry-standard polished chrome, and for more decorative installations, brushed and polished nickel finishes.

- > Made from durable material for heavy use in commercial applications
- ▶ Biodegradable, Green Seal[™] certified soap available
- Foaming soap for efficient cleansing*
- Auto-purge cycle to prevent soap from clogging the spout
- Micro-sensor under the spout for accurate hand detection*
- Low soap indicator
- Low battery indicator*
- Easy-to-refill soap reservoir

*Function available on specific models.

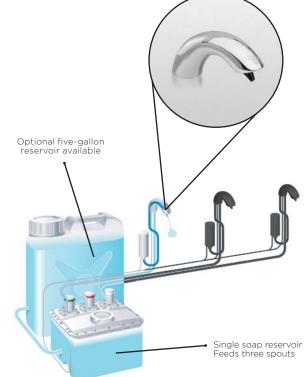

TOTO STANDARD SOAP DISPENSER

TES3ADC-12 - Automatic infrared sensor activated, soap dispenser with 1.06 gallon soap tank and 5.8 gallon sub tank. Automatic sensor adjustment on installation.

SENSOR OPERATED SOAP DISPENSER & TOTO SOAP OVERVIEW

SENSOR OPERATED

SENSOR OPERATED SOAP DISPENSER TES1ADC-05 TES2ADC-05 TES3ADC-05

MULTI-UNII

 \bigcirc

SOAP DISPENSER TES100AA TES100DA



TOTO[®] SOAP 1 GALLON PACKAGE OF 4, 1 GAL. EACH TSFB1 TOTO SOAP 5 GALLON PACKAGE AS 1, 5 GAL. CONTAINER TSFB5



- Sensor operated foaming soap dispenser
- Self-adjusting sensor spout with base unit, mounted hardware and supply lines
- Chrome plated
- Single-hole mount
- Multiple unit configurations available*
- Required to use TOTO Soap




- Sensor operated soap dispenser
- Sleek and compact modern design
- Solid brass spout and body
- Removable Soap Tank for easy access and effortless soap refill
- Vandal resistant spout
- Two power options: AC or DC
- Available in polished chrome (#CP) only




- Specially formulated antibacterial soap
- Approved by the FDA for use in Class I & Class II hospital applications
- Warranty requires use of TOTO soap with dispenser



- Specially formulated antibacterial soap
- Approved by the FDA for use in Class I & Class II hospital applications
- Warranty requires use of TOTO soap with dispenser









TOTO® SOAP 55 GALLONS PACKAGED AS 1, 55 GAL. DRUM TSFB55 TOTO SCENTED SOAP 1 GALLON PACKAGE OF 4, 1 GAL. EACH TSFB1-GS

TOTO SCENTED SOAP 5 GALLON PACKAGE AS 1, 5 GAL. CONTAINER TSFB5-GS





- Specially formulated antibacterial soap
- Approved by the FDA for use in Class I & Class II hospital applications
- Warranty requires use of TOTO soap with dispenser
- ▶ Green Seal™ GS-41 certified
- No triclosan
- Biodegradable
- Helps qualify for LEED credits
- Green Seal GS-41 certified
- ▶ No triclosan
- Biodegradable
- > Helps qualify for LEED credits

COMMERCIAL CLEAN DRY® HAND DRYERS

Innovation & Technology Highlights

TOTO's Clean Dry hand dryers offer high-speed air for an effective, economical solution. Infrared sensor-operated, Clean Dry offers innovative air wicking technology that dries the user's hands in under 12 seconds.



TOTO COMMERCIAL PERFORMANCE

Clean Dry hand dryers reduce energy use by 25 percent over traditional electronic hand dryers that sometimes fail to dry hands completely. Further, Clean Dry dryers are extremely quiet during operation with a low decibel rating between 55 and 62 dB



TOTO HAND DRYER BENEFITS

- Unobtrusive designs that blend into any bathroom décor
- Environmentally friendly no paper waste
- Eliminates the cost of providing paper towels, including the man-power needed to restock paper and discard trash
- Double-sided fan simultaneously dries hands from both sides, greatly reducing drying time*
- Washable trays to eliminate water splashing and prevent slip and fall accidents
- Vandal resistant designs

TOTO HAND DRYERS HELP THE ENVIRONMENT



...reduces paper waste

COMMERCIAL HAND DRYERS OVERVIEW

CLEAN DRY® HIGH SPEED HAND DRYER HDR130#SV

Ġ.

CLEAN DRY HIGH SPEED HAND DRYER HDR101#WH

Ġ.

CLEAN DRY HIGH SPEED HAND DRYER HDR111#SS

Ġ.

CLEAN DRY HIGH SPEED HAND DRYER HDR120#WH

Ġ.



- High speed hand dryer
- Hygienic, touch-free operation
- Durable aluminium construction
- ▶ Low Operating noise 55dB(A)
- Energy Efficient 390 watts
- AC powered
- Available in silver (#SV)




- High speed hand dryer
- Hygienic, touch-free operation
- Splash resistant
- Water tray to prevent slip and fall
- Space saving, compact design
- ▶ Low Operating noise 57dB(A)
- Energy Efficient 390 watts
- AC powered
- Available in white (#WH)





- High speed hand dryer
- Hygienic, touch-free operation
- Splash resistant
- Space saving, in-wall design
- Vandal proof water tray
- Low Operating noise 56dB(A)
- Energy Efficient 390 watts
- AC powered
- Stainless Steel Cover
- Flush mount
- ADA compliant
- Available in stainless steel (#SS)



- Hygienic sensor-activated hand dryer
- Double-sided blowers for faster dry time
- Sleek and compact design
- > 208 mph of air speed
- Side panels and water tray to prevent water from trickling to the floor
- ▶ Low operating noise 57dB(A)
- Energy efficient
- Available in white (#WH)







7-3/8" (186mm) 21-5/8" (550mm)







COLORS AND FINISHES

CHINA **COLORS**



BRASS **FINISHES**



LifeKoat™ #PN Polished Nickel

LifeKoat™ #BN Brushed Nickel

HAND DRYER COLORS #WH White #SS Stainless Steel #SV Silver

TECHNOLOGY ICON GUIDE



TOTO USA, INC. 1155 SOUTHERN ROAD MORROW, GA 30260 800-350-8686

www.totousa.com

#KO-112016-CB Printed in the U.S.A. 11/16