


Submitted Model No.: _____

Specific Features: _____



▲ Designate Proper Finish Suffix

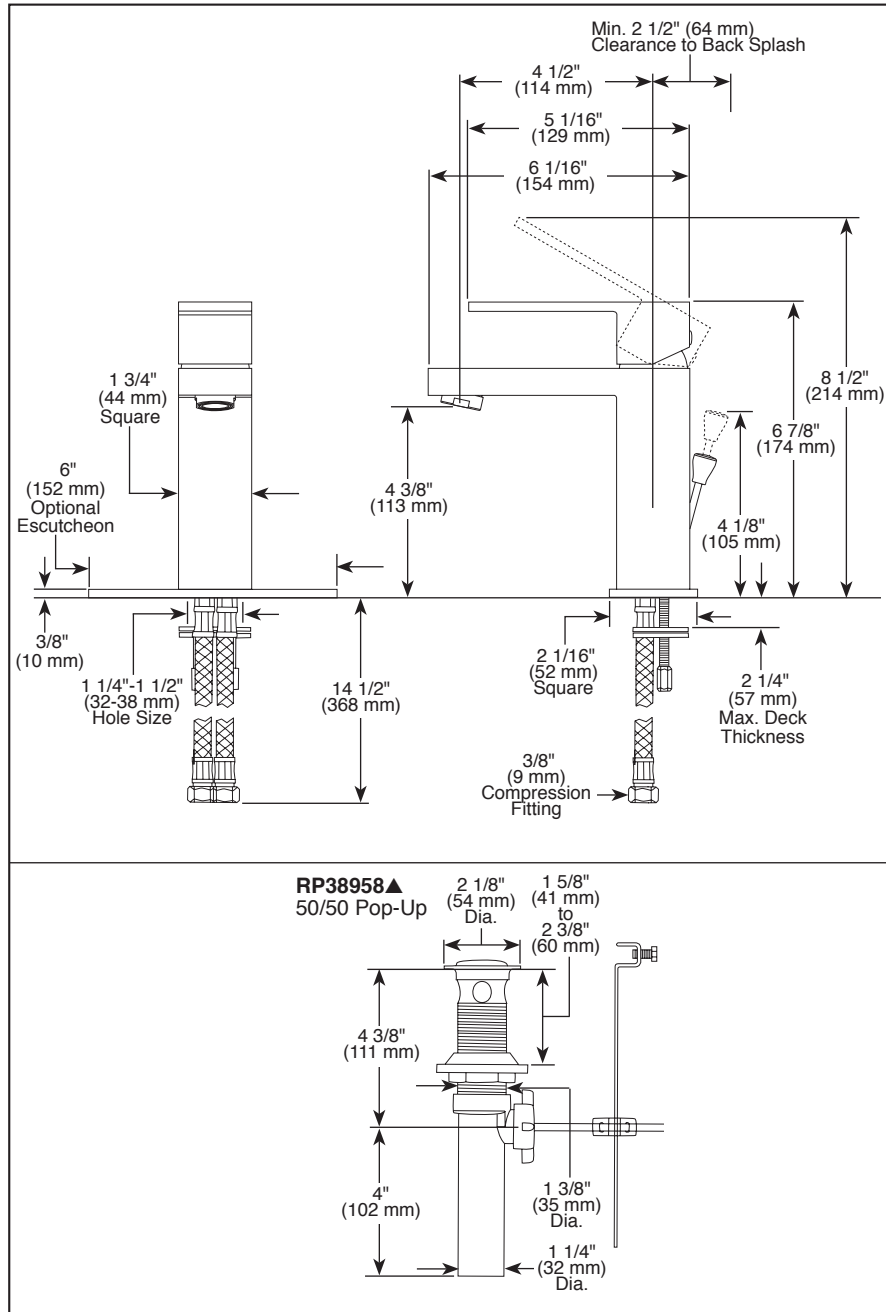

LAVATORY FAUCETS

- Angular Modern
- Single Handle Deck Mount

STANDARD SPECIFICATIONS:

- Max. 1.20 gpm @ 60 psi, 4.54 L/min @ 414 kPa
- One or three hole mount (6" escutcheon plate sold separately for 3 hole installation (RP78358))
- Control mechanism is the ceramic disc cartridge with temperature limiter
- Red/blue indicator markings
- Solid brass body
- Lift rod hole plug included
- 1/4" threaded stud mounting
- 3/8" compression fittings with flexible supply hoses 14 1/2" (368 mm) long
- Models have 50/50 pop-up type fitting with plated flange and stopper

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- ♿ Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense®
- Verified compliant with .25% weighted average Pb content regulations.



55 E. 111th Street, Indianapolis, Indiana 46280
 350 South Edgeware Road, St. Thomas, ON N5P 4L1
 © 2016 Masco Corporation of Indiana

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.