



Catalog Number 70160
UPC Number 60198670160
Description Momentary Contact Push Button Switch
SPST
ON-OFF

Features

- Heavy Duty
- 2 Pole SPST
- Solid steel/nickel-plated bushings
- 2 Copper Screw Terminals
- ½ in. Diameter mounting hole

General

Material: Nickel Plated Steel Actuator Button
HD Non-Metallic Housing
2 6" 18 AWG Leads

Dimension Information

See Engineering Dwg

Specifications

Temperature Rating: 0°C - 65°C
Voltage Rating: 125/250 VAC
Flammability Rating: N/A
Amperage Rating: 8 AMP, 125VAC
4 AMP, 250VAC
Motor Load Rating: 1/3HP, 125VAC
Insulation Resistance: 500V DC 100 mohm 1 Minute
Contact Resistant: 50 mohm Max
Dielectric Strength: 1500 V AC 1 Minute

Packaging

Bag Qty 10


Certifications

UL Yes
CSA Yes
ROHS

www.morrisproducts.com

Morris Products 53 Carey Road, Queensbury, NY 12804

Rating	4A 250V,8A 125V 10A 125V.A.C.,1/3HP 125V.A.C.		
Contact Resistance	50m ohm Max		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Switch Function	2P SPST ON-OFF		

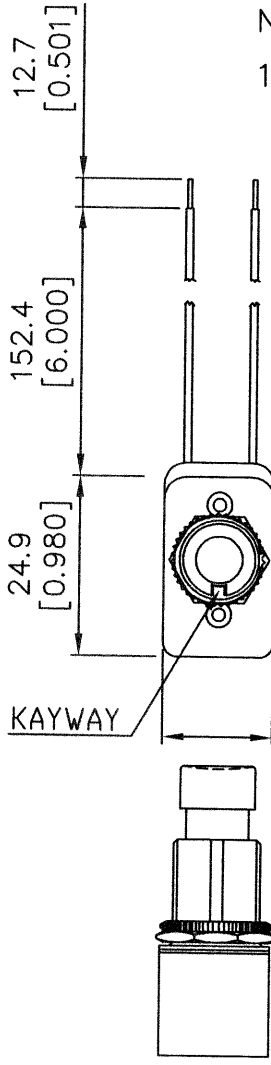

NOTES:
1. RECOGNIZED.

STRANDED BARE COPPER
WIRE 18 AWG 105°C
UL & CSA, AWM #1015

15/32-32,NS 2A

Black


φ10.3
[0.406]

DATE CODE

Black wire

41.0
[1.612]

15.6
[0.615]



Part	Unit	Mat'l	Status
Button	1	Plastic, black	
Bushing	1	Zinc, nickel plated	
Hex nut	1	Zinc, nickel plated	Assy
Knurl nut	1	Zinc, nickel plated	Assy

								△
								△
Date	Name	Description						NO
Drawn	Checked	Approved	Morris Products		Model Name	PUSH SWITCH		
			Queensbury NY		Model No.			REV.
08/09/'10		08/09/'10	Morris P/N	70160				0