

# 270 WEST HAMPTON

**MANSFIELD®**

Vitreous China, Pedestal Lavatory

## FEATURES

- 20-1/8" x 16-1/4" pedestal lav
- 16-1/4" x 10-1/8" basin
- 33-1/2" luxury height
- Concealed front overflow
- Available in 4" or 8" faucet centers
- Mansfield® limited lifetime warranty
- Available in White, Biscuit and Bone



## COMPONENTS

| MODEL # | DESCRIPTION  | CODES/STANDARDS |
|---------|--|-----------------|
| 270     | Lavatory with pedestal. Less faucet, drain assembly and supply. Specify color.         |                 |
| 272-4   | Lavatory with 4" faucet center. Less faucet, drain assembly and supply. Specify color. |                 |
| 272-8   | Same as above with 8" faucet centers. Specify color.                                   |                 |
| 273     | Pedestal only. Specify color.  |                 |



# 270 WEST HAMPTON



Vitreous China, Pedestal Lavatory

## SPECIFICATIONS


| MODEL # | DESCRIPTION                         | CODES/STANDARDS |
|---------|-------------------------------------|-----------------|
| 270     | 20-1/8" x 16-1/4" pedestal lavatory |                 |

|              |                                   |
|--------------|-----------------------------------|
| MATERIAL     | Vitreous China                    |
| WARRANTY     | Vitreous China - Limited Lifetime |
| FAUCET HOLES | 4" or 8"                          |

|                 |   |
|-----------------|---|
| SHIPPING WEIGHT | Model 272 - 24 lbs. (10 kg)<br>Model 273 - 14 lbs. (6 kg) |
|-----------------|---|

## TECHNICAL INFORMATION

**Note:** these dimensions are nominal and subject to change without notice.

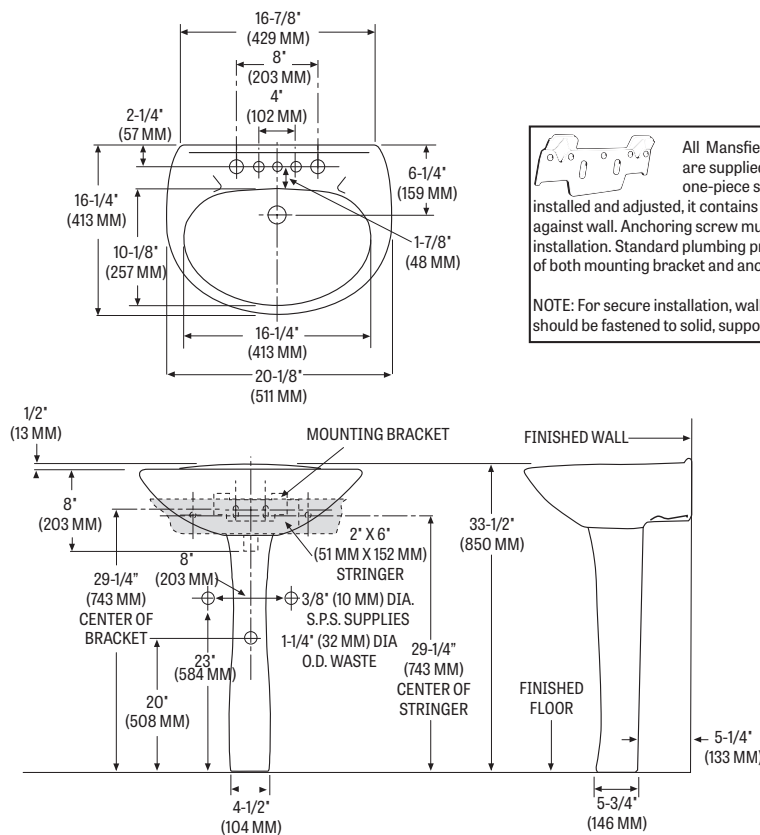

All Mansfield® wall-mount lavatories are supplied with this exclusive one-piece steel hanger. Easily installed and adjusted, it contains 7 holes for solid mounting against wall. Anchoring screw must be used for correct installation. Standard plumbing practice recommends use of both mounting bracket and anchoring screws.

**NOTE:** For secure installation, wall-mounting hanger should be fastened to solid, support wall stud.

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.

