148-153

QuantumOne™

Elongated Front, SmartHeight™, Vitreous China, Two-Piece Toilet



Features _____

- High efficiency (HET), pressure assist vessel
- 1.0 gpf / 3.8 lpf ultra-low water consumption
- SAVES up to 40% more water than conventional 1.6 gpf flushing systems
- SmartHeight™ (16-1/2" bowl)
- 12" rough-in
- Trip levers
 - Model 45 left hand, chrome-plated metal trip lever
 - Model 47 chrome-plated push button actuator
 - Model 49 right hand, chrome-plated metal trip lever
- 2-1/8" glazed trapway
- The Mansfield® limited lifetime warranty (china)
- Ten year limited vessel warranty
- Available in White and Standard Colors: Biscuit and Bone



Components _____

Model #	Description	Codes/Standards
148-153	Elongated front, SmartHeight™ pressure-assist, two-piece toilet. Less toilet seat and supply. Specify color.	
148	Elongated front, SmartHeight™ toilet bowl only. Less toilet seat. Specify color.	CON HET COLORS TOLET ADA
153	Pressure-assist tank and cover only with left hand, chrome-plated metal trip lever. Less supply. Specify color.	Demonstr

Other Options:

153RH	Same as model 153, except with right hand, chrome-plated, metal trip lever.	UPC	HIGH EFFICIENCY TOILET	ADA
154	Same as model 153, except with push button actuator.	C ✓ ®		




Specifications

Model #	Description	Codes/Standards	
148-153	Elongated front (1.0 gpf/3.8 lpf) two-piece toilet	HIGH EFFICIENCY TOLET TO	

Specification	Description	Specification	Description	
Material	Vitreous China	Trap Diameter	2-1/8"	
Water Pressure Range	35 to 80 PSI	Trap Seal	3"	
Flush System	Flushmate IV™ Pressure Assist Vessel	Rough-in	12"	
Water Usage	1.0 gpf / 3.8 lpf	Shipping Weight	Model 148 - 52 lbs. (23.5 kg)	
Water Surface Area	9-1/4" X 11-3/8"		Model 153/153RH/154 - 41 lbs. (18.5 kg)	
MaP Rating	1000 grams	Warranty	Vitreous China - Limited Lifetime Tank Trim - Limited One Year	

Technical Information

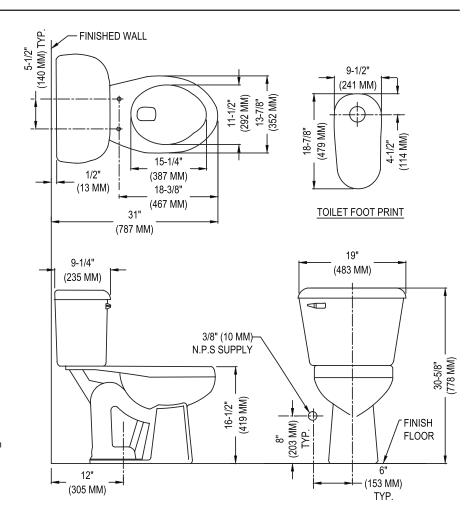

See our complete line of acrylic and vitreous china bathroom fixtures, plastic tank trim and plumbing products.

These dimensions are nominal and subject to change without notice.

Fixture performance and specifications meet or exceed ASME A112.19.2-2008/CSA B45.1-08 standards, and other state and local codes.