




## Product Specifications:

- :: Maximized performance, specification grade, LED strip in custom anodized housing
- :: Available in pre-cut sections allowing field assembly to every 6 or 12 inches
- :: Available in 30K and 40K CCT.
- :: Delivered up to 1125 lumens per unit
- :: Input Voltage 120
- :: Up to 58 LPW
- :: CRI: 81+
- :: Life rated at 50,000 hours
- :: Dimming compatible
- :: Engineered to eliminate 'dark zones'
- :: Built-in circuitry protects against short circuits
- :: No UV • No IR • No mercury • No lead • No Asbestos

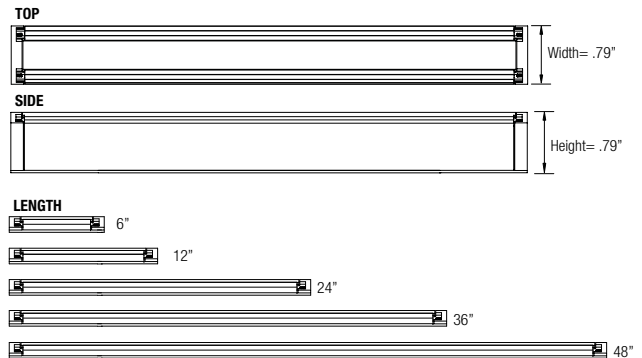

## ORDERING GUIDE


Example: **ESL-LED-6-120-30K**

TYPE	LENGTH (WATT, LUMEN)	VOLTAGE	COLOR	ACCESSORIES
ESL-LED	<input type="checkbox"/> 6" (3.1 WATT, 152 LUMEN) <input type="checkbox"/> 12" (6.1 WATT, 312 LUMEN) <input type="checkbox"/> 24" (12 WATT, 560 LUMEN) <input type="checkbox"/> 36" (16 WATT, 758 LUMEN) <input type="checkbox"/> 48" (24 WATT, 1125 LUMEN)	<input type="checkbox"/> 120	<input type="checkbox"/> 30K <input type="checkbox"/> 40K	<input type="checkbox"/> ESL-LED-ACC-1 (MOUNTING CLIPS-INCLUDED) <input type="checkbox"/> ESL-LED-ACC-2 (SHORT INTER-CONNECTOR-INCLUDED) <input type="checkbox"/> ESL-LED-ACC-3 (4" CORNER CONNECTOR FOR CONTINUOUS RUN) <input type="checkbox"/> ESL-LED-ACC-4 (MOUNTING DOUBLE-SIDED TAPE) <input type="checkbox"/> ESL-LED-ACC-5 (CONNECTION BOX) <input type="checkbox"/> ESL-LED-ACC-6 (40" POWER CONNECTOR) <input type="checkbox"/> ESL-LED-ACC-7 (40" INTER-CONNECTOR) <input type="checkbox"/> ESL-LED-ACC-8 (70" HARD WIRE CONNECTOR) <input type="checkbox"/> ESL-LED-ACC-9 (12" INTER-CONNECTOR)

### Included Accessories:



### Optional Accessories:

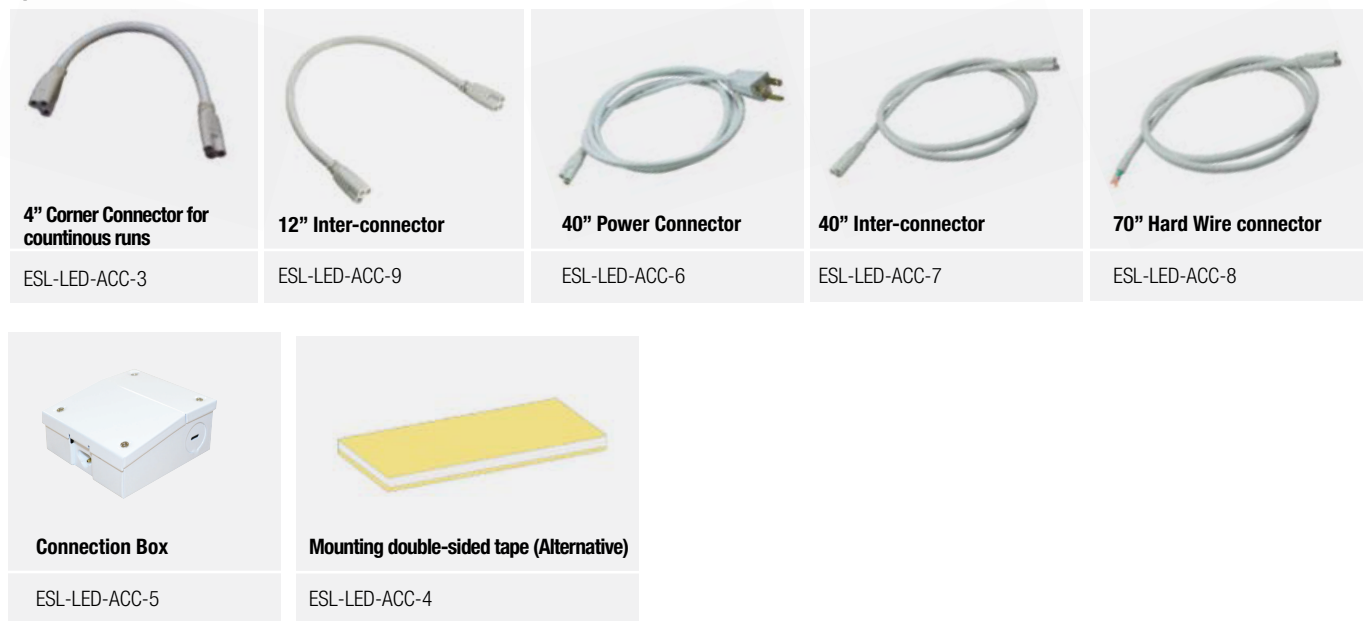

LED  
ESL

ESL-LED GREAT PERFORMANCE 120V SLIM LINK PROFILE