



INDEPENDENCE SERIES Vaportite

IVT Series Independence Vaportite



Project Information

Job Name

Fixture Type Independence Vaportite

Catalog Number

Approved by

SPECIFICATIONS:

	IVT5L4K	IVT5L45K	IVT5L5K
Lumens:	5010	4849	4849
Watts:	34.23	34.13	34.13
Lumens/Watt:	148.0	143.1	143.1
CRI:	80	80	80
CCT:	4000	4500	5000
Lifespan:	100,000 ¹	100,000 ¹	100,000 ¹

Construction:

The 1-piece housing is made of durable composite material. The poured gasket provides a continuous seal for the lens. Twelve latches compress lens to housing for a tight seal. Stainless steel mounting brackets are furnished with each fixture.

Lens:

Injection molded acrylic lens with high impact additive. Lens is frosted to eliminate glare.

Listings:

Luminaire is certified to UL/cUL Standards for Wet Locations. DesignLights Consortium qualified luminaire, eligible for rebates from DLC member utilities.

AC Input:

120/208/240/277 V

Driver:

Constant current, Class 2 120-277 VAC, 47-63Hz
High Efficiency – min. 85%
Off-State Power: 0 Watts
0-10V Dimming

Temperatures:

Min Start: -40°C Max: 40°C

LEDs:

Atlas LEDs provide higher lumen output, greater energy efficiency and more reliable fixture performance. LEDs manufactured for the IVT series utilize Epoxy Guard conformal coating which reduces the chance of board corrosion. 100,000+ hrs.¹ lifespan
IVT series fixtures operate at 4000K, 4500K and 5000K CCT.

Ratings:

IP65

Installation:

Mounting bracket allows unit to be hung with aircraft cable.

Applications:

Cold storage, garages, refrigerated cases, stairwells, storage areas, fuel pump canopy, low-bay fixtures for commercial & industrial buildings.

Testing:

Atlas LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 & LM-80.


Warranty:

Five-year limited warranty

Options: 3C = 3' Cord, 6C = 6' Cord, 10C = 10' Cord, 20C = 20' Cord



DIMENSIONS:

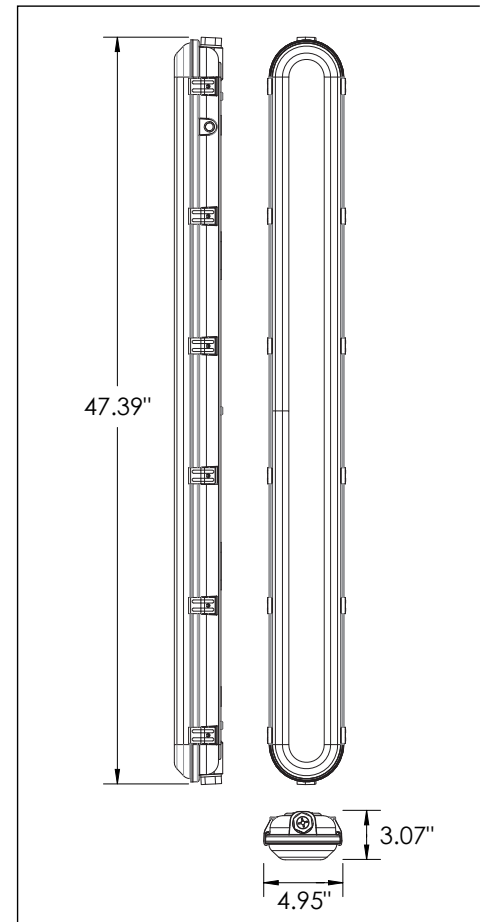

¹LED Life Span Based Upon LM-80 Test Results

**Rebates and Incentives are available in many areas.
Contact an Atlas Representative for more information.**

ATLAS LIGHTING PRODUCTS, INC.

PO BOX 2348 | BURLINGTON, NC 27216
800-849-8485 | FAX: 1-855-847-2794 | www.atlasled.com


*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. Meets Buy American requirements within the ARRA.



INDEPENDENCE SERIES Vaportite

IVT Series Independence Vaportite

ORDERING FORMAT

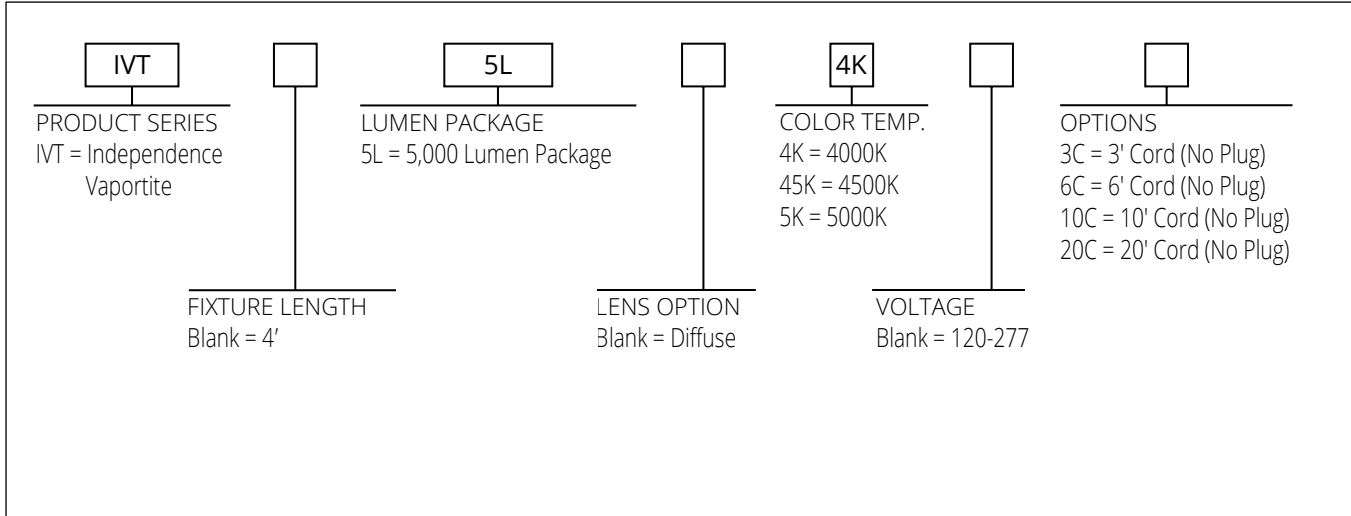

IP RATING

	DESCRIPTION	DEFINITION
6	Dust-tight	No ingress of dust
5	Protects against water jets	Water projected from a nozzle against the enclosure from any direction shall have no harmful effect