

Hospital Grade Straight Blade Receptacles

2 Pole, 3 Wire Grounding
15A 125V, 20A 125V




Duplex Receptacles – Compact Design

FEATURES

- Sturdy, compact design delivers full hospital grade performance, lower profile.
- Unique screw terminal guards provide fast, easy insulation from conductive surfaces.
- Heavy gauge, 0.037" (0.94mm) triple-wipe brass line contacts provide excellent long-term plug blade retention.
- High impact and chemical-resistant nylon face.
- Long, broad mounting strap helps reach large panel cutouts for Code compliance.
- Automatic grounding system eliminates need for bonding jumper in grounded metal enclosure, provides redundant measure of ground continuity where jumper used.
- Screw-Catch™ feature on device speeds mounting of wallplates.

Back and Side Wire

Rating					
A	V/AC	NEMA	Color	Catalog No.	
15	125	5-15R	Brown	8200HB	
			Gray	8200HGY	
			Ivory	8200HV	
			White	8200HW	
20	125	5-20R	Brown	8300HB	
			Gray	8300HGY	
			Ivory	8300HV	
			Red	8300HRD	
			White	8300HW	

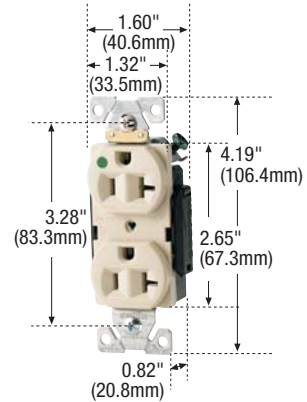

8300H

INDUSTRIAL
INSTITUTIONAL

F-2
HOSPITAL GRADE
DEVICES

TESTING & CODE COMPLIANCE

- Listed to UL 498, meets Federal Specs. WC-596 (file no. E15058).
- Meets all CSA requirements, C22.2 no. 42 (file no. 6914 (6233-01)).

MATERIAL CHARACTERISTICS

Meets flammability requirements per UL 94, V2 rated.
Temperature Rating:
-20° C to 70 °C.



5-15R



5-20R