

Cypress Lighting Technologies, LLC

P.O. Box 912 Robert, Louisiana 70455


985-817-9100



15W & 40W PRO SERIES



CL-SWL-40P
Equal to 600W

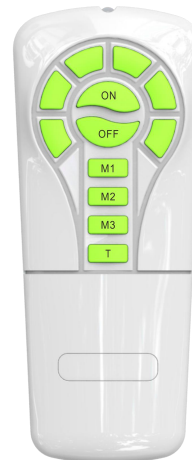

URANUS SERIES
SOLAR FLOOD LIGHT



CL-SWL-15P
Equal to 300W

Item :	CL-SWL-15P	CL-SWL-40P
Solar panel		
Power	Monocrystalline , 14V/5W	Monocrystalline , 14V/10W
Li-ion battery		
Capacity	3.7V28.86WH 2.6AH/PC	3.7V57.72WH 2.6AH/PC
Charging/Discharging Temp	0~45°C / -20~60°C	0~45°C / -20~60°C
Charging Time	7.5H	7.5H
LED (OSRAM)	3030 30pcs	3030 60pcs
Color Temp	5700K , Ra 70+	5700K , Ra 70+
Efficiency	190lm/W	190lm/W
UV LED	-	-
Performance		
Lighting Time in Rainyday	>10 days	>10 days
Control Mode	Button Switch , ON/OFF Long Press 1.5s	
Lighting Mode(Remote Control)	M1 : 50% 1500LM(5H) + 10% 300LM Till dawn M2 : 30% 900LM(5H) + 10% 300LM Till dawn M3 : 20% 600LM Till dawn T: 3000LM 2Hrs	M1 : 50% 3000LM(5H) + 10% 600LM Till dawn M2 : 30% 1800LM(5H) + 10% 600LM Till dawn M3 : 20% 1200LM Till dawn T : 6000LM 2Hrs
Mode Indication	M1: Red / M2: Green / M3: Orange , T: Green light flashes	
Capacity Indication	Green : >70% Orange : 30%~70% Red 10%~30%	Green : >70% Orange : 30%~70% Red : 10%~30%
PIR	-	-
Core technology	ALS2.3	ALS2.3
Solar Panel Autoclean	-	-
IP/IK Class	IP65	IP65
Carton Size	8	4