

| | |
|--|------|
| PROJECT | TYPE |
| CATALOG NUMBER (FOR CUSTOM LENGTHS, PLEASE SEE ORDERING EXAMPLE BELOW) | |

PRODUCT OVERVIEW

GM's Professional Series Flexible LED Tape combines style and technology with reliability. Designed for professional installations that demand a high level of quality, the LTR-P Series includes a wide array of key features and is available in 16'-4" (5M) and 100' (30M) reels.

KEY FEATURES

- 12VDC
- 2400K, 2700K, 3000K, 3500K, 4000K and 5000K color temps
- Dry location
- 120 LEDs per meter
- Cuttable every 2"
- Custom lengths available - consult factory
- Premium 2835 diodes
- 120° viewing angle
- Dimmable
- 3M adhesive back
- Maximum run on a given lead is 32'-8"
- Includes Sure-Tite connectors

ELECTRICAL

- 12V
- 1.5 watts per foot

OPTICS


- 90+ CRI

CERTIFICATION

- ETL
- Complies with Title 24 when used with Lutron HiLume Series
- Class 2

WARRANTY

- 5 year warranty when paired with GM power supply

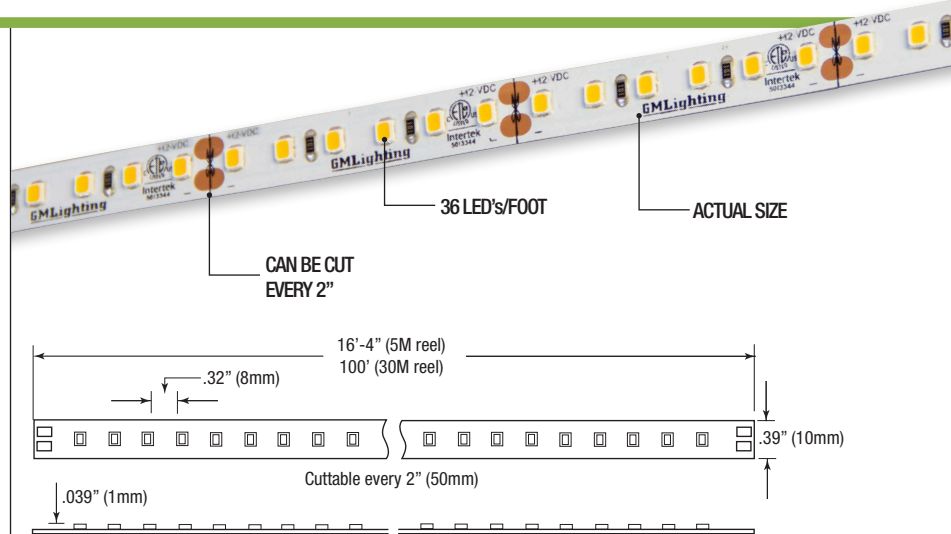

LTR-P SERIES ORDERING EXAMPLE

LTR-P - 12V - 1.5W - XXK - XXX

| SERIES PREFIX (P = PRO) | VOLTAGE 12V | WATTS / FOOT 1.5W | COLOR TEMP 24K = 2400K 27K = 2700K 30K = 3000K 35K = 3500K 40K = 4000K 50K = 5000K | REEL LENGTH 16 = 16'-4" 100 = 100' |
|----------------------------|----------------|----------------------|--|--|
|----------------------------|----------------|----------------------|--|--|

PRODUCT ORDERING

| Product No. | Length | Lumens per ft. | CRI | Color Temp. | Max. Run |
|------------------------|-------------|----------------|-----|-------------|----------|
| LTR-P-12V-1.5W-24K-16 | 16'-4" / 5M | 119 | 90+ | 2400K | 32'-8" |
| LTR-P-12V-1.5W-27K-16 | 16'-4" / 5M | 125 | 90+ | 2700K | 32'-8" |
| LTR-P-12V-1.5W-30K-16 | 16'-4" / 5M | 126 | 90+ | 3000K | 32'-8" |
| LTR-P-12V-1.5W-35K-16 | 16'-4" / 5M | 140 | 90+ | 3500K | 32'-8" |
| LTR-P-12V-1.5W-40K-16 | 16'-4" / 5M | 144 | 90+ | 4000K | 32'-8" |
| LTR-P-12V-1.5W-50K-16 | 16'-4" / 5M | 146 | 90+ | 5000K | 32'-8" |
| LTR-P-12V-1.5W-24K-100 | 100' / 30M | 119 | 90+ | 2400K | 32'-8" |
| LTR-P-12V-1.5W-27K-100 | 100' / 30M | 125 | 90+ | 2700K | 32'-8" |
| LTR-P-12V-1.5W-30K-100 | 100' / 30M | 126 | 90+ | 3000K | 32'-8" |
| LTR-P-12V-1.5W-35K-100 | 100' / 30M | 140 | 90+ | 3500K | 32'-8" |
| LTR-P-12V-1.5W-40K-100 | 100' / 30M | 144 | 90+ | 4000K | 32'-8" |
| LTR-P-12V-1.5W-50K-100 | 100' / 30M | 146 | 90+ | 5000K | 32'-8" |

Kelvin temperature (color) ±100K.
16'-4" and 100' reel includes 24" lead affixed to tape. 16'-4" reel includes (3) ESTW-60 Sure-Tite connectors. 100' reel includes (10) ESTW-60 Sure-Tite connectors.

For aluminum mounting channels and power supplies - see our website at www.gmlighting.net



CONNECTORS

| Catalog No. | Description |
|-------------|--|
| ESTC-1 | Sure-Tite tape to tape connector |
| ESTC-90 | Sure-Tite 90° connector |
| ESTLK-60 | Sure-Tite 60" adjustable tape to tape connector |
| ESTW-60 | Sure-Tite 60" adjustable tape to power connector |
| ESTW-C0 | Sure-Tite tape to power supply connector (no wire) |