

Load Centers

Load Center OEM Interiors^①

1Ø: Small Circuit Main Lug Interiors

Amps	Catalog Number ^②	Spaces	Circuits	Dimensions	
				Height	Width
60	I0204ML1125CU	2	2	4.40	1.85
60	I0303ML3100CU	3	3	5.77	3.42
125	I0408ML1125	4	8	4.51	6.61
125	I0816ML1125CU	8	16	6.19	6.81
125	I0816ML1125CUSP	8	16	6.19	6.81
200	I0202L1200	4	4	3.88	7.13
200	I1220L1200CT	12	20	9.00	7.00

1Ø: High Circuit Main Lug Interiors with Neutral Bars^④

Amps	Catalog Number ^②	Spaces	Circuits	Dimensions	
				Height	Width
125	I1224L1125CU	12	24	10.80	9.80
125	I1624L1125CU	16	24	12.80	9.80
125	I3040L1125CU	30	40	20.80	9.80
200	I0816L1200CT ^③	8	16	10.80	9.80
200	I1224L1200CU	12	24	10.80	9.80
200	I1632L1200CU	16	32	12.80	9.80
200	I2040L1200CU	20	40	14.80	9.80
200	I3040L1200CU	30	40	14.80	9.80
200	I4040L1200CU	40	40	24.80	9.80
225	I4242L1225CU	42	42	26.80	9.80

3Ø: Main Lug Interiors^②


Amps	Catalog Number	Spaces	Circuits	Dimensions	
				Height	Width
125	SI1224L3125B	12	24	10.04	9.95
200	SI1224L3200B	12	24	10.04	9.95
200	SI2442L3200B	24	42	16.04	9.95
200	SI3054L3200B	30	54	19.04	9.95
225	SI4242L3225B	42	42	25.04	9.95
125	PI1224L3125CUB	12	24	10.04	9.95
200	PI1224L3200CUB	12	24	10.04	9.95
200	PI1836L3200CUB	18	36	13.04	9.95
125	PI1836L3125CUB	18	36	13.04	9.95
200	PI2442L3200CUB	24	42	10.04	9.95
200	PI3054L3200CUB	30	54	19.04	9.95
225	PI4242L3225CUB	42	42	25.04	9.95

1Ø: Parallel Lug Interiors with Neutral Bars

Amps	Catalog Number ^②	Spaces	Circuits	Dimensions	
				Height	Width
200	CTI2040L1200CU	20	40	14.80	9.80
200	CTI2440L1200CU	24	40	16.80	9.80
200	CTI3040L1200CU	30	40	20.80	9.80

Lug Data

Interior	Amperage	Wire range	Torque
I0204ML1060	60	2/0 - 4 AWG	45 lb. - ins.
I0303ML3100	100	2/0 - 4 AWG	45 lb. - ins.
I1224ML1100	100	2/0 - 4 AWG	45 lb. - ins.
I0408ML1125	125	2/0 - 4 AWG	45 lb. - ins.
I0816ML1125CU/CUSP	60	2/0 - 4 AWG	45 lb. - ins.
Single Phase	125	2/0 - 4 AWG	110 lb. - ins.
Single Phase	200/225	300 kcmil - 4 AWG	250 lb. - ins.
Three Phase	125	300 kcmil - 6 AWG	340 lb. - ins.
Three Phase	200/225	300 kcmil - 6 AWG	340 lb. - ins.

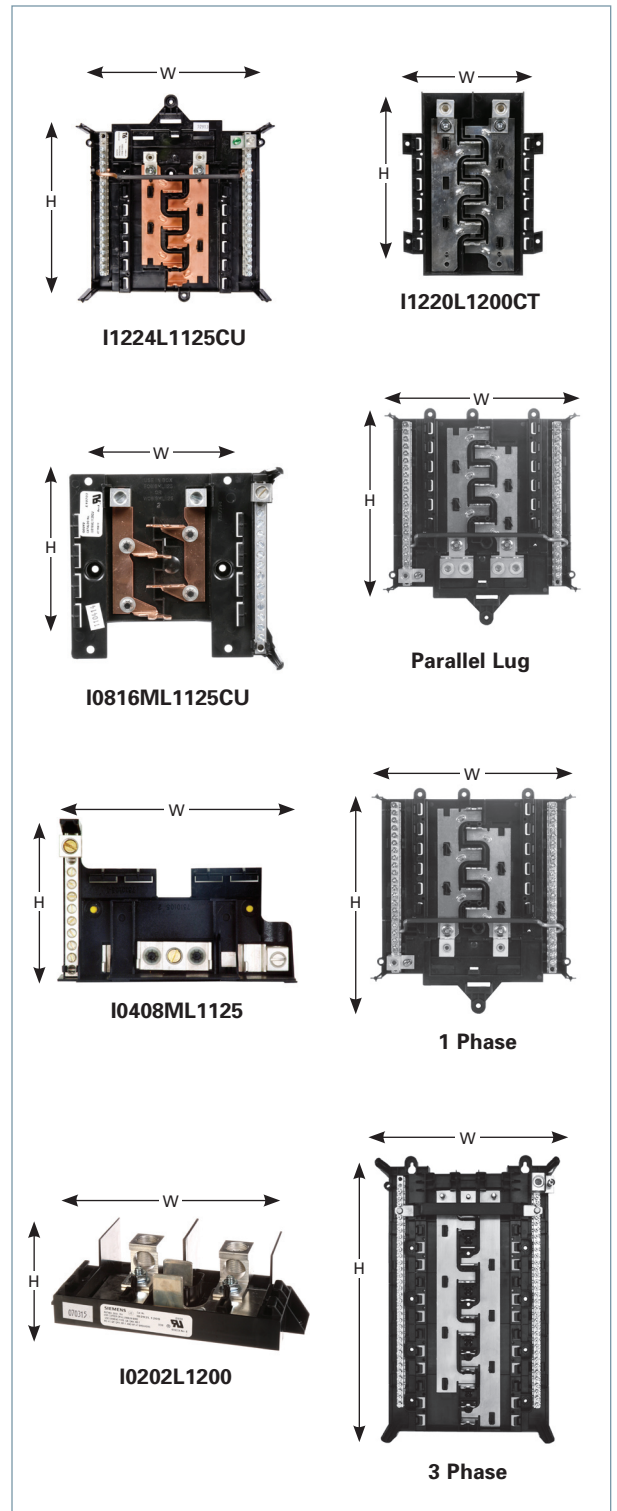

① UL Recognized Components.

② The letters "CU" in any catalog number represent copper bus bars.

③ Feed thru lugs provided.

④ Convertible to main breaker using the MBK main breaker kits.