
SUBMITTAL DATA SHEET

Iron Body Gas Valve - Plug Style - Gas Only Flat Head Tamperproof - 10685B

Inlet: FNPT Thread, Outlet: FNPT Thread

Cast iron body, brass plug manually operated 175 PSIG natural, manufactured, or propane gas valve for use in above ground gas piping systems in ambient temperatures between -20°F to 150°F. Iron body valves considered full port of flow.

Dimensions Size А В С D Е F G 1/2" 3.14 1.66 3.16 1.00 1.57 Yes Yes 3/4" 3.14 1.66 3.16 1.00 1.57 Yes Yes 1" 3.36 1.68 1.86 3.53 1.12 Yes Yes 1.94 1 1/4" 3.88 1.38 2.38 4.38 Yes Yes 1 1/2" 2.33 4.99 4.66 2.66 1.62 Yes Yes 2" 5.60 2.80 2.97 5.57 1.87 Yes Yes

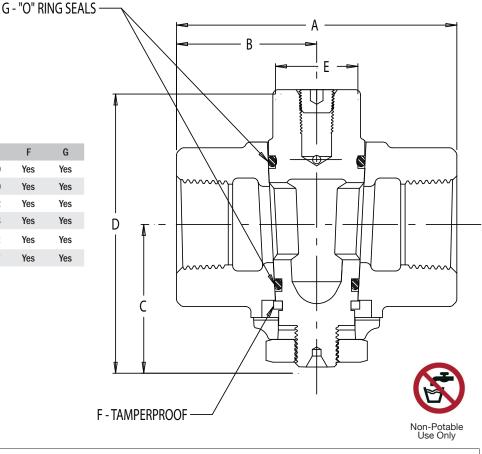

SUBMITTAL INFORMATION

- Sizes: 1/2", 3/4", 1", 1 1/4", 1 1/2", 2"
 - 175 PSIG

-

- NOTE: All A.Y. McDonald plug style gas valves are factory set. DO NOT TAMPER WITH BOTTOM NUT.
- Iron Body Less Check
- Brass Plug
- Threads per ANSI / ASME B1.20.1
- Manufactured to the guidelines set forth in ASME B16.33

WARNING: It is unlawful in CALIFORNIA & VERMONT (effective 1/1/2010); MARYLAND (effective 1/1/2012); LOUISIANA (effective 1/1/2013) and the UNITED STATES OF AMERICA (effective 1/4/2014) to use THIS PRODUCT in the installation or repair of any public water system or any plumbing in a facility or system that provides water for human consumption. The wetted surface area of THIS PRODUCT has a weighted average lead content greater than 0.25%.



A.Y. McDonald Mfg. Co. P.O. Box 508 Dubuque, IA 52004-0508 Toll Free: 1-800-292-2737 Fax: 1-800-832-9296 Hours: 7:00 a.m. - 5:00 p.m., CST sales@aymcdonald.com www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: