
SUBMITTAL DATA SHEET

NL Ball Style Curb Stop – 76102-22



-22 CTS Compression x FNPT

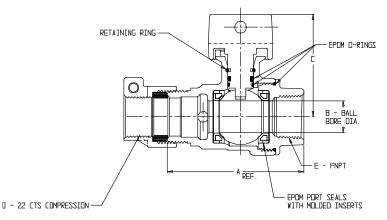

DRAWING MAY NOT RESEMBLE ACTUAL VALVE CONFIGURATION

MODEL	SIZE	A	В	С	D	E
76102-22	3/4 X 5/8 X 3/4	2.95	. 63	2,31	3⁄4	3⁄4
76102-22	3/4	3.24	, 75	2,42	3⁄4	3⁄4
76102-22	3⁄4 X 3.88	3.B8	.75	2.42	3/4	3⁄4
76102-22	3⁄4 X 3⁄4 X 1	3,38	. 75	2.42	3⁄4	1
76102-22	1 X 3/4 X 3/4	3.22	. 75	2.42	1	3⁄4
76102-22	1 X 3/4 X 1	3.42	. 75	2,42	1	1
76102-22	l	3.76	1.00	2.65	1	1
76102-22	1 1/4 X 1 X 1	4.06	1.00	2.65	1 1/4	1
76102-22	1 1/4 X 1 X 1 1/4	4.20	1.00	2.65	1 1/4	1 1/4
76102-22	1 1/4	4.40	1.25	2.94	1 1/4	1 1/4
76102-22	1 1/2	4.87	1.50	3.40	1 1/2	1 1/2
76102-22	2	5.80	2.00	3.70	2	2

SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with "NL"
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- PTFE coated brass ball
- Rated for 300 PSIG water pressure
- Blow out proof EPDM port seals
- End piece joint sealed with an EPDM o-ring and thread locker
- Insert stiffeners required on all flexible plastic connections



A.Y. McDonald Mfg. Co. P.O. Box 508 Dubuque, IA 52004-508 **Toll Free:** 1-800-292-2737 **Fax:** 1-800-832-9296 **Hours:** 7:00 a.m. – 5:00 p.m., CST

sales@aymcdonald.com www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: