
DUST GUARD

TO INSTALL DUST GUARDS

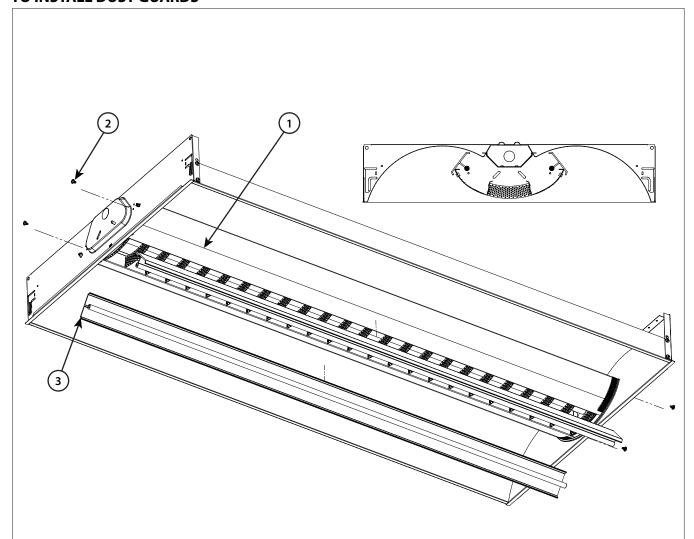

- 1) Remove curved optical assembly from plastic light seal by flexing optic off at corners. Do not remove or damage plastic overlay. For fixtures without light seals, remove perforated side panels by flexing off end plate mounting stud 2) Insert (4) mounting screws (supplied) in fixture end plate in holes closest to the top of the fixture.
- 3) Place one end of dust guard over mounting screw and flex slightly to fit over opposite mounting screw
- 4) Repeat other side.
- 5) Re-install optical assembly

HUBBELL