

# SPECIFICATION & FEATURES 1-GANG BLANK AND DEVICE OVERS

## FEATURES & DIMENSION:

- 1-Gang Blank and Device Covers
- Zinc Die Cast (Except 1-BC, 1-BC-G, & 1CA-SW, 1CA-SW15, 1CA-SW20)
- Gasket included
- Device mounted
- Meets NEC Article 406.9 (A) for damp and wet locations
- Width: 2-3/4"
- Height: 4-1/2"

## CERTIFICATION:




File E227970



Listed



Wet Location

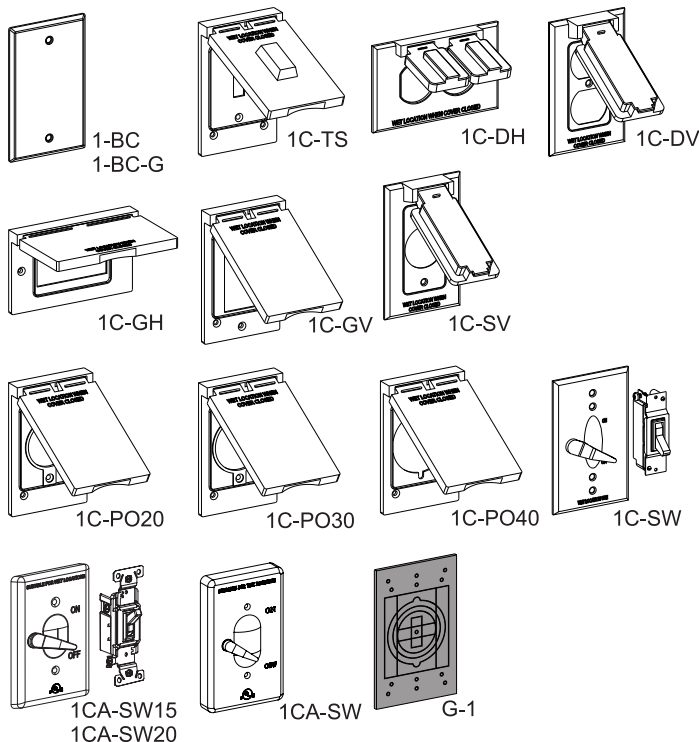

## CONFIGURATION DATA:

Part No.			Description	Std.Pkg.
Gray	Bronze	White		
1-BC	-	-	Aluminum Blank (Unpainted)	50
1-BC-G	1-BC-BR	1-BC-W	Heavy-Duty Galvanized Steel Blank	50
1C-TS	1C-TS-BR	1C-TS-W	Toggle Switch	25
1C-DH	1C-DH-BR	1C-DH-W	Duplex/Combo, Device - Horizontal	25
1C-DV	1C-DV-BR	1C-DV-W	Duplex/Combo, Device - Vertical	25
1C-GH	1C-GH-BR	1C-GH-W	GFCI - Horizontal	25
1C-GV	1C-GV-BR	1C-GV-W	GFCI - Vertical	25
1C-SV	1C-SV-BR	1C-SV-W	Single recept.or Switch Vertical - 1.406" Diameter	25
1C-PO20	-	-	20A Power Outlet - 1.594" Diameter	25
1C-PO30	-	-	30A Power Outlet - 1.750" Diameter	25
1C-PO40	-	-	40-50A Power Outlet - 2.281" Diameter	25
-	1C-SW-BR	1C-SW-W	Lever + 15A Single-Pole Switch	25
1CA-SW15	1CA-SW15-BR	1CA-SW15-W	Aluminum Lever + 15A Single-Pole Switch	25
1CA-SW20	-	-	Aluminum Lever + 20A Single-Pole Switch	25
1CA-SW	1CA-SW-BR	1CA-SW-W	Aluminum Lever, compatible with Standard Toggle Switches	25
-	G-1 (Black only)	-	Universal 1-Gang Foam Gasket	50

