SPECIFICATION SHEET



ELITE SINGLE HANDLE LAVATORY FAUCET

Contraction of the second seco
--

Model #: Specific Features: Project Name: Submitted For: Date:

L-6162H SHOWN ADA

Model #	Features	Finish	
L-6162H*		СР	
L-6162H-BN*		PVD BN	

* Aerator limited to 1.5 GPM Flow Rate


Metal Lever Handle

- · 3-7/8" Reach, 1-3/4" From Deck to Aerator
- Stainless Steel Ball Operation
- 3-Hole 4" Installation
- Brass Pop-Up Drain Assembly
- 18" Stainless Steel Flex Connectors with 3/8" Compression Connection Nuts
- With 1.5 GPM Flow Rate

Olympia products are engineered and manufactured to meet the following standards and codes:

ASME A112.18.1 ANSI A117.1 IAPMO LISTED/ CUPC Listed-Cal Green Compliant ANSI / NSF 61, SECTION 9 CONTAINS NO MORE THAN 0.25% WEIGHTED AVERAGE LEAD CONTENT



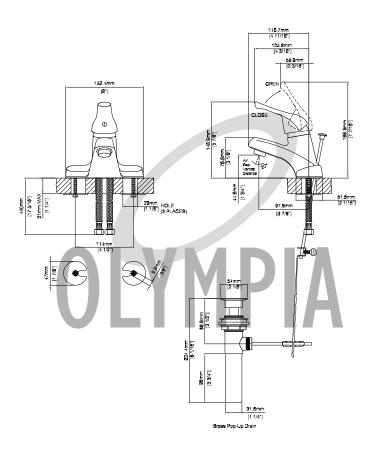

La Vergne, TN www.olympiafaucets.com Olympia Faucets, Inc. © 2017 A Pioneer Industries Inc. Brand DMSPL-6162H/REV. 03.17