

ESB216-12

APPLICATION and PERFORMANCE SPECIFICATION

Electronic ballast for (2/1) T12HO lamps up to 8ft long or any combination thereof from 2-16 ft. Electronic ballast for (2/1) T8HO lamps up to 6ft long or any combination thereof from 4-12 ft. Electronic ballast for use with T12HO/T8HO lamps or any combination of lamps in circuit as long as total length per circuit does not exceed 7ft for T12HO/5ft for T8HO.

• Line Voltage: 120 to 277 vac, ±10%, 50/60Hz

Instant Start Operation

Active Power Factor Correction

*60 Hz data

Parallel Lamp Operation

Lamp		Lamp Footage		Volts	Max Input	Nominal			
					Power	Line Current	Power	THD	Crest
Туре	#	Min	Max		(Watts)	(Amps)	Factor		Factor
T12HO	2,1	2	16	120	140	1.17	>.90	<10%	<1.7
T12HO	2,1	2	16	277	137	0.49	>.90	<10%	<1.7
T8HO	2,1	4	12	120	128	1.07	>.90	<10%	<1.7
T8HO	2,1	4	12	277	124	0.45	>.90	<10%	<1.7

Application and Performance Specification Information Subject to Change without Notification.

Power Factor < 90% @ 277volts 5ft and under, THD <20% for 2-4ft applications

Performance:

- Meets ANSI Standard C82.11-2011
- Meets ANSI Standard C62.41-2002
- Meets FCC Part 18 (Class A) for EMI and RFI non-consumer limits

Application:

Minimum Starting Temperature:	-20° F, -29° C
Energy Saving Lamps:	60° F, 16° C
 Maximum Case Temperature: 	176° F, 80° C
Sound Rated:	А

Sound Rated:

Safety:

- · No PCB's
- _cUL_{us} Listed
 - (Class P, Type HL, Type 2 Outdoor)
- cCSAus Listed


Physical Parameters:

Length: 9.	.5'
------------	-----

- Width: 1.7"
- Height: 1.2"
- Weight: 1.75 lbs
- Carton Quantity: 1 piece
- Lead length: Black, White 24" (± 1")
 - Red, Blue 120" (± 1")

Warranty:

Universal Lighting Technologies warrants to the purchaser that each electronic ballast will be free from defects in materialor workmanship for a period of 4 years from date of manufacture when properly installed and under normal conditions of use. Call **1-800-BALLASTx800** for technical assistance.

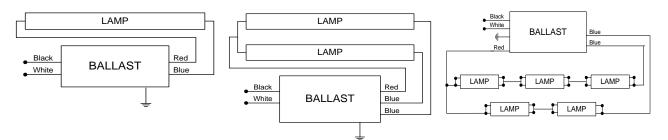

For 1-lamp application, cap blue lead

Multiple Lamp Application

Ballast case must be grounded. Manufactured in China.

