

SUBMITTAL DATA SHEET

Sump & Sewage Check Valves Sump & Sewage – 2063 - 2068




Rubber Hose Coupling: Valves are designed to fit on standard sump pump line connections. Easy to install over 1 1/2" or 1 1/4" PVC pipe (schedule 40 & 80), steel pipe, or copper tubing. One piece housing construction, no gasket to fail or leak. Housing is made of high grade ABS plastic, clamps are 301 stainless steel, and hoses are SBR rubber. Valve body will glue up to standard PVC pipe & fittings for installation options. Non-metallic and cannot corrode. Color is red/black.

True Union: Solvent weld "true union" style available in 1 1/2" and 2" for PVC pipe only. (Schedule 40 & 80) EPDM O-ring seal design for excellent sealing performance. Excellent for heavy duty ejector pump applications. Non-metallic and cannot corrode.

Compression Swing: Slips over outer diameter of PVC pipe (schedule 40 & 80) for easy installation, no gluing required. Available in 2" sizes only. Non-metallic and cannot corrode.

Dimensions

Model	Size	A	B	C
2063	1 1/4"	7 1/4"	2 5/8"	1 5/8"
2063	1 1/2"	9 3/16"	2 5/8"	1 7/8"
2063	1 1/2"	9"	3"	1 7/8"
2063	2"	9 1/2"	3 5/8"	2 3/8"
2069	1 1/2"	11 3/8"	3"	1 7/8"
2069	2"	12 3/8"	3 5/8"	2 3/8"
2065	1 1/2"	6"	3 1/4"	1 15/16"
2065	2"	6 3/4"	4"	2 3/8"
2065S	1 1/2"	8 3/8"	3 1/4"	1 15/16"
2065S	2"	9 5/8"	4"	2 3/8"
2066	1 1/2"	11"	4 1/2"	1 15/16"
2066	2"	12 1/2"	5 1/2"	2 3/8"
2066S	1 1/2"	13 3/8"	4 1/2"	1 15/16"
2066S	2"	15 3/8"	5 1/2"	2 3/8"
2067	2"	6 5/8"	4"	2 3/8"
2067S	2"	9 1/2"	4"	2 3/8"
2068	2"	13"	5 1/2"	2 3/8"
2068S	2"	16"	5 1/2"	2 3/8"
2065LU	1 1/2"	4 3/4"	3"	1 15/16"
2065LU	2"	5 1/2"	3 5/8"	2 3/8"
2065SLU	1 1/2"	7 1/4"	3"	1 15/16"
2065SLU	2"	8 3/8"	3 5/8"	2 3/8"

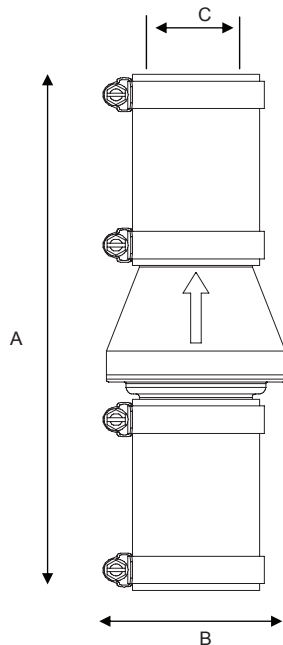

SUBMITTAL INFORMATION

Static Head: Min 2ft. / Max 10 ft. static head over check valve
Pressure Test: Factory tested to 20 PSI
Application: Vertical or Horizontal
Clamps: 301 Stainless Steel (Tridon)

Pressure Tests: Yes, all valves tested for leaks
Cracking Pressure: 0 PSI
Maximum Temperature: Not Rated

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
P.O. Box 508
Dubuque, IA 52004-0508

Toll Free: 1-800-292-2737
Fax: 1-800-832-9296
Hours: 7:00 a.m. - 5:00 p.m., CST

sales@aymcdonald.com
www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: