



Submitted Model No.:

Specific Features:



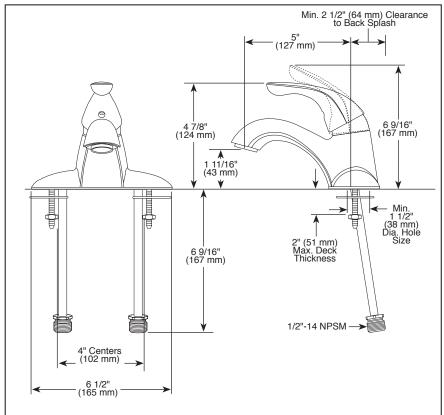

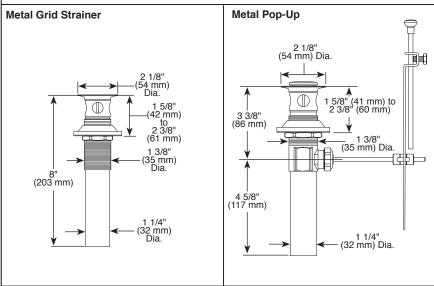

LAVATORY FAUCETS

Single Handle

STANDARD SPECIFICATIONS:

- Maximum 1.20 gpm @ 60 psi, 4.54 L/min @ 414 kPa
- HGM (models only) maximum 0.50 gpm @ 60 psi, 1.90 L/min @ 414 kPa
- TGM (models only) maximum 0.35 gpm @ 60 psi, 1.30 L/min @ 414 kPa
- Two and three hole mount
- Solid brass fabricated body
- Vandal resistant lever handle. Red/blue colored graphics indicate hot/cold temperature.
- Diamond coated ceramic cartridge
- Adjustable handle limit stop
- 3/8" O.D. copper supply tubes with 1/2"-14 NPSM adapters
- Models have 1/4" threaded mounting studs
- Available options for field conversion: 6" (152 mm) long elbow handle-red/blue colored graphics indicate hot/cold temperature. Order RP54687.
- Vandal resistant aerator or spray outlet
- Metal grid strainer (523)
- Metal pop-up drain (520)
- Lift rod hole (520)

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1ASME A112.18.2 / CSA B125.2

Indicates compliance to ICC/ANSI A117.1

- EPA WaterSense® ◆=Only models as indicated
 Verified compliant with .25% weighted
- average Pb content regulations.

