

PEERLESS

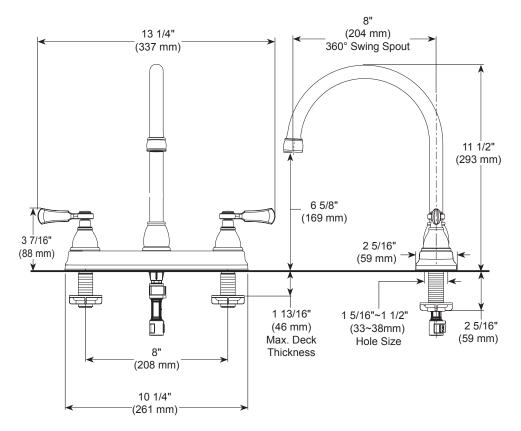

RP101326▲ Spray, Hose Assembly & Spray Support



KITCHEN FAUCETS

- Elmhurst[™] Collection
- Two Handle Deck Mount
- 4 Hole Sink Applications

STANDARD SPECIFICATIONS:

- Maximum 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
- Two handle kitchen faucet for exposed mounting on 4 hole sinks with 8" centers.
- Ceramic cartridge
- Spout rotates 360°
- 1/2" -14 NPSM threaded male inlet shanks
- Model with spray attachment has anti-siphon device as integral part of valve body.

WARRANTY:

 Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.

COMPLIES WITH:

• ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1