

# Calconduit™

Rigid Conduit, Rigid & EMT Fittings

## EMT Factory Elbows - 45°

### Application:

EMT elbows are to be installed on conduit raceways for the interconnection of conduit runs and other fittings.

### Features:


Fabricated from UL Listed Electrical Metallic Tubing (EMT)

### Certifications and Compliances:

- UL & CUL Listed
- UL File Number E315441
- UL797 with statements of conformance
- ANSI C80.3
- National Electrical Code® 2008 -Article 358
- A.R.R.A. Available
- Federal Specification WW-C-563\*

### Options:

Available in any degree of bend from 5° to 90°, and special radius

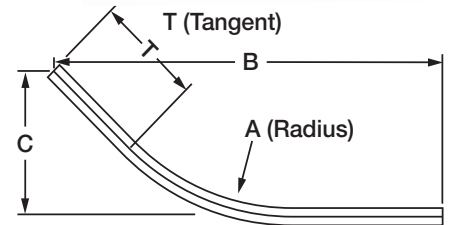

45° Elbows				Dimensions (Inches)				
Item Number	Description	Wt. (lbs)	Box Qty	A	B	C	T	Cut Length
EM0545EL00	½" X 45°	0.70	50	4.0	7.0	2.9	1.9	8.0
EM0745EL00	¾" X 45°	0.90	50	4.5	7.4	3.0	2.0	9.0
EM1045EL00	1" X 45°	1.60	25	5.8	9.5	4.0	2.7	10.0
EM1245EL00	1-¼" X 45°	2.90	20	7.3	13.1	5.4	4.3	15.5
EM1545EL00	1-½" X 45°	3.80	15	8.3	14.0	5.8	4.3	16.5
EM2045EL00	2" X 45°	5.40	10	9.5	16.1	6.6	5.4	18.5
EM2545EL00	2-½" X 45°	10.80	50	10.5	19.0	7.9	6.8	22.5
EM3045EL00	3" X 45°	14.70	35	13.0	20.5	8.5	6.7	23.5
EM3545EL00	3-½" X 45°	19.50	35	15.0	22.8	9.5	7.1	26.0
EM4045EL00	4" X 45°	29.30	35	16.0	29.2	12.1	10.5	33.5

**Calconduit**

12021 Woodruff Ave., Downey, CA 90241

Ph: (562) 803.4388 Ph: (800) 225.7473 Fax: (562) 803.4488 | calconduit.com

