


BIG-SP

Big Max® - BELOW GROUND SAMPLE PORTS

Specification: MIFAB® H.D.P.E. sample port with H-20, 20,000 lbs. load rated lid and corrugated ADS pipe extension to meet the finished grade. Complete with 20 7/8" diameter body and 4" no hub inlet and outlet connections.

Function: Several areas require the use of sampling ports to provide the local authorities an opportunity to retrieve and test waste water discharged from the grease interceptor to ensure that the FOG contained within the effluent is within requirements.

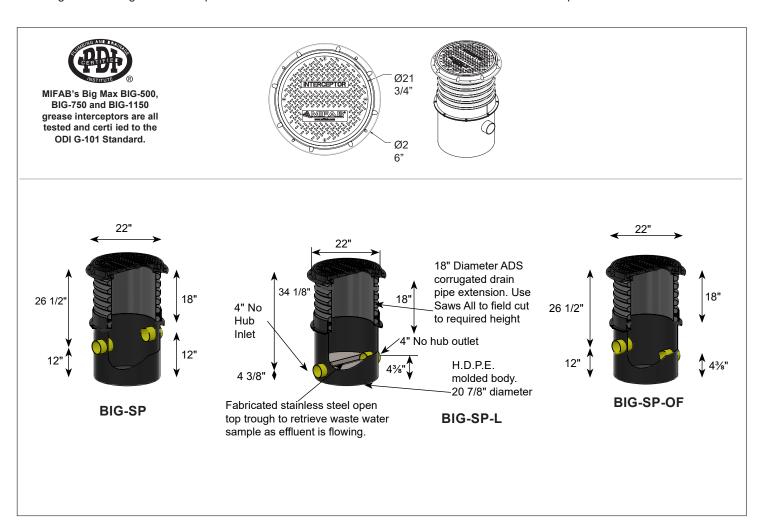

Model No.	Description
BIG-SP	External sampling port - inline high connections
BIG-SP-L	External sampling port - inline low connections
BIG-SP-OF	External sampling port - offset

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.	
Job Name:	Page No:
Section No:	Contractor:
Schedule No:	Purchase Order No:

MIFAB® reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880